



**U.S. Tsubaki Power Transmission, LLC**

301 E. Marquardt Dr.

Wheeling, IL 60090

**Phone:** 847.459.9500 or 800.323.7790

**Fax:** 847.459.9515


**Email:** [sales@ustsubaki.com](mailto:sales@ustsubaki.com)

**Website:** [www.ustsubaki.com](http://www.ustsubaki.com)

## ITEM # BREU30, BREU-30 MM BORE CAM CLUTCH

The BREU Series Cam Clutch is commonly used in backstopping applications that require higher speed inner race overrunning, and low to medium speed engagement speed capability. The BREU Series Cam Clutch is popular amongst both OEM's and end users, utilizing a broad array of mounting accessories and the ability to select keyway positions on the inner and outer race to offer mounting flexibility. BREU Series incorporates a "lift off" style cam which provides increased Cam Clutch life, please see

[+ more](#)

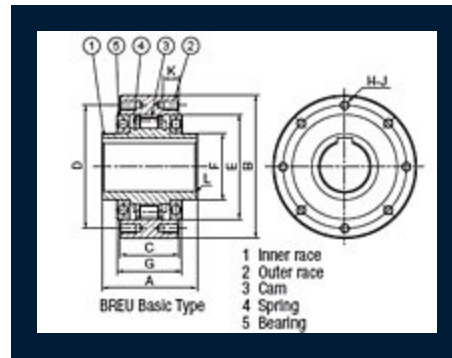

### Specifications

<b>Bore Size</b>	1.181 in 30.00 mm
<b>Torque Capacity</b>	447.7 lb·ft 607.0 N·m
<b>Min. Inner Race Overrunning</b>	880 rpm
<b>Max. Inner Race Overrunning</b>	3600 rpm
<b>Max. Engagement</b>	350 rpm
<b>Inner Race Keyway</b>	8 x 3.3 mm

<b>A (Overall Width)</b>	2.992 in 76.00 mm
<b>B (Overall Height)</b>	3.937 in 100.00 mm
<b>C (Outer Race Width)</b>	2.008 in 51.00 mm
<b>D (Bolt Circle Diameter)</b>	3.425 in 87.00 mm
<b>E (Outer Race I.D.)</b>	2.953 in 75.00 mm
<b>F (Inner Race O.D.)</b>	1.772 in 45.00 mm
<b>G (Cam Cage Width)</b>	2.205 in 56.00 mm
<b>H-J (Bolt Circle Tap and Qt.)</b>	M6
<b>K (Thread Depth)</b>	0.394 in 10.00 mm
<b>L (Chamfer)</b>	0.039 in 1.00 mm
<b>Weight</b>	5.940 lb 2.700 kg