



U.S. Tsubaki Power Transmission, LLC
301 E. Marquardt Dr.
Wheeling, IL 60090

Phone: 847.459.9500 or 800.323.7790

Fax: 847.459.9515

Email: sales@ustsubaki.com


Website: www.ustsubaki.com

[All Categories](#) > [Sprockets](#) > [Roller Chain Sprockets](#) > [ANSI Single Pitch Sprockets](#) > [No. 25 - 1/4" Pitch Sprockets](#) > [No. 25 - 1/4" Pitch - Stainless Steel Sprockets](#) > [Item # 25B12SS](#)

ITEM # 25B12SS, NO. 25 - 1/4" PITCH - STAINLESS STEEL SPROCKETS

No. 25, B Style, .250" plain bore SS

All dimensions are nominal values and for reference only

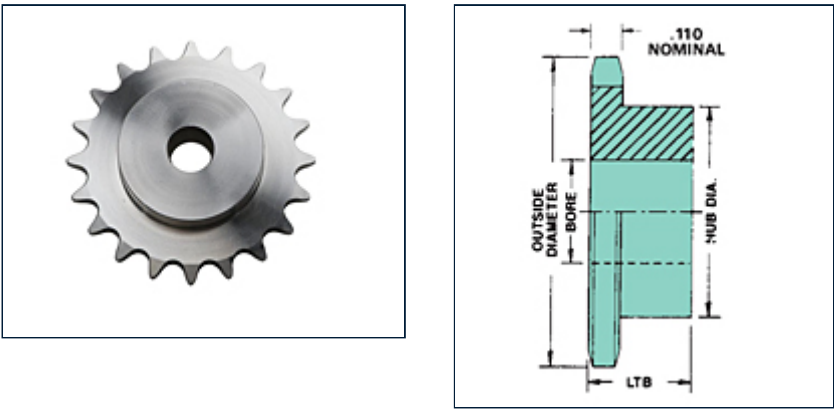

[Sprocket Specifications](#) | [Chain Technical Data](#)

Sprocket Specifications	
Stock Bore Diameter	0.250 in
Hub Diameter	0.625 in
LTB	0.500 in
Style	B

No. Teeth	12
Outside Diameter	1.083 in
Pitch Diameter	0.966 in
Caliper Diameter	0.836 in
Max. Bore¹	0.375 in
Weight	0.060 lb
Tooth Nominal Width	0.110 in

Chain Technical Data	
Pitch	0.250 in
Chain Size	25
Inside Width	0.125 in
Roller Diameter	0.130 in

¹ Dimensions shown allow for standard keyway with set screw at 90°.