
U.S. Tsubaki Power Transmission, LLC
301 E. Marquardt Dr.
Wheeling, IL 60090


Phone: 847.459.9500 or 800.323.7790
Fax: 847.459.9515

Email: sales@ustsubaki.com
Website: www.ustsubaki.com

ITEM # **BB15GDK**, BB-2GD-15 MM BORE CAM CLUTCH

BB-2GD Series Cam Clutches build upon the standard BB Series with the addition of complete rubber seals on both sides. The addition of rubber seals makes the BB-GD Series slightly wider (0.197", 5 mm) than the equivalent 62 Series ball bearing.

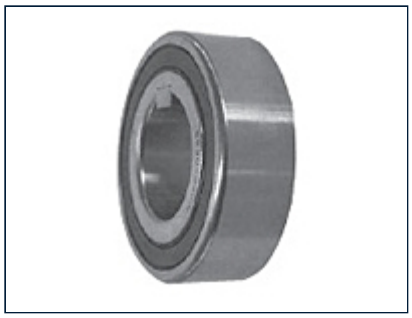

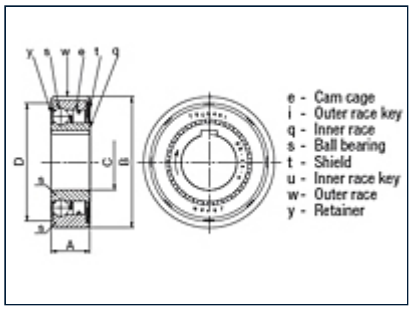

Specifications

Torque Capacity	21.0 lb·ft 29.0 N·m
Max. Overrunning Inner Race	3600 rpm
Max. Overrunning Outer Race	2000 rpm
Drag Torque	0.030 lb·ft 0.04 N·m
A (Overall Width)	0.630 in

	16.00 mm
B (Overall Diameter)	1.378 in 35.00 mm
C (Bore Size)	0.591 in 15.00 mm
D (Outer Race I.D.)	1.278 in 32.45 mm
S (Chamfer)	0.024 in 0.60 mm
Dynamic Bearing Loads	1338 lbf 5950 N
Static Bearing Loads	726 lbf 3230 N
Construction	Rubber seals on both sides
Weight	0.200 lb 0.070 kg