
U.S. Tsubaki Power Transmission, LLC
301 E. Marquardt Dr.
Wheeling, IL 60090


Phone: 847.459.9500 or 800.323.7790
Fax: 847.459.9515

Email: sales@ustsubaki.com
Website: www.ustsubaki.com

ITEM # **BB25GDK**, BB-2GD-25 MM BORE CAM CLUTCH

BB-2GD Series Cam Clutches build upon the standard BB Series with the addition of complete rubber seals on both sides. The addition of rubber seals makes the BB-GD Series slightly wider (0.197", 5 mm) than the equivalent 62 Series ball bearing.

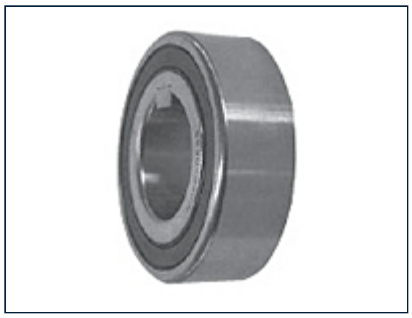

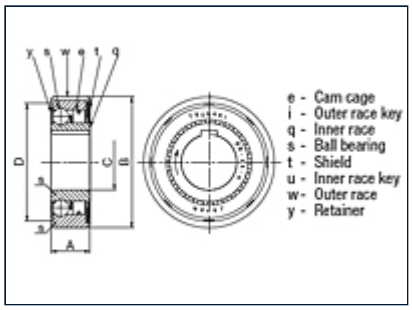

Specifications

Torque Capacity	58.0 lb·ft 78.0 N·m
Max. Overrunning Inner Race	2500 rpm
Max. Overrunning Outer Race	1400 rpm
Drag Torque	0.041 lb·ft 0.06 N·m
A (Overall Width)	0.787 in

	20.00 mm
B (Overall Diameter)	2.047 in 52.00 mm
C (Bore Size)	0.984 in 25.00 mm
D (Outer Race I.D.)	1.852 in 47.05 mm
S (Chamfer)	0.039 in 1.00 mm
Dynamic Bearing Loads	2405 lbf 10700 N
Static Bearing Loads	1416 lbf 6300 N
Construction	Rubber seals on both sides
Weight	0.400 lb 0.200 kg