U.S. Tsubaki Power Transmission, LLC
301 E. Marquardt Dr.
Wheeling, IL 60090


Phone: 847.459.9500 or 800.323.7790
Fax: 847.459.9515


Email: sales@ustsubaki.com
Website: www.ustsubaki.com

ITEM # BUS212, BUS200-212 MM BORE CAM CLUTCH

BUS200 Series Cam Clutch is a general purpose Cam Clutch used in backstop, overrunning, and indexing applications. Generally the customer supplies the inner race as a component of his machinery but if desired, Tsubaki can also provide an inner race. A second very convenient feature is that the BUS200 Series outside diameter matches with 6200 Series ball bearings. Because of the common popular dimensions, BUS200 Series Cam Clutches are found as integral components in many pieces of machinery;

more

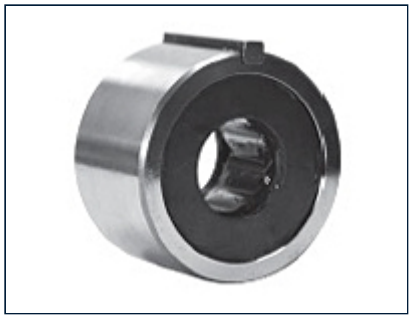

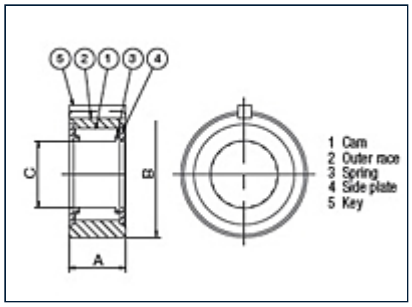

Specifications	
Torque Capacity	907.0 lb·ft 1230.0 N·m
Max. Overrunning Shaft	1200 rpm
Max. Overrunning Outer Race	180 rpm

Drag Torque	0.210 lb·ft 0.29 N·m
Max. Indexing	150 cpm
A (Overall Width)	1.654 in 42.42 mm
B (Overall Diameter)	4.3299/4.3287 in 109.98/109.95 mm
C (Shaft Diameter)	2.209/2.208 in 70.03/70.00 mm
Keyway	3/8 x 3/8 x 1-5/8 in
Use with Bearing Number	6212
Weight	4.000 lb 1.800 kg