U.S. Tsubaki Power Transmission, LLC
301 E. Marquardt Dr.
Wheeling, IL 60090

Phone: 847.459.9500 or 800.323.7790
Fax: 847.459.9515

Email: sales@ustsubaki.com
Website: www.ustsubaki.com

ITEM # MZ70-70, MZ70-70 MM BORE CAM CLUTCH

MZ Series Cam Clutch products are designed for general overrunning applications. The MZ Series can be used in applications which require the inner or outer race to have overrunning capability. The MZ Series comes pre-lubricated with grease and is ready to install. No lubrication maintenance is required. This series is ideal for gears, pulleys and clutch assemblies.

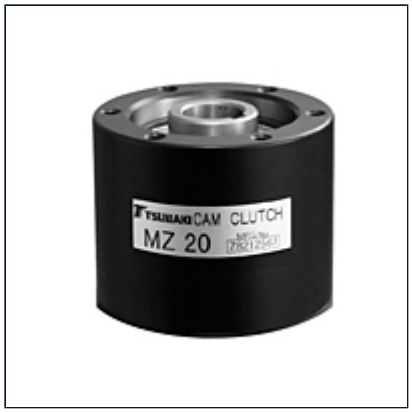

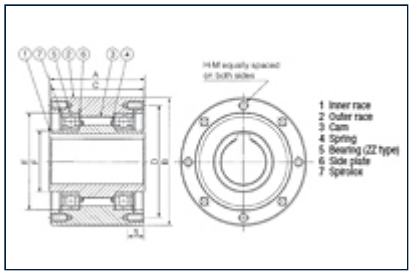

Specifications	
Bore Size	70.00 mm
Bore Keyway	20 x 4.9 mm
Torque Capacity	2242.2 lb·ft 3040.0 N·m

Drag Torque	0.937 lb·ft 1.27 N·m
Max. Overrunning Shaft	1300 rpm
Max. Overrunning Outer Race	250 rpm
Max. Indexing	150 cpm
A (Overall Width)	4.134 in 105.00 mm
B (Overall Diameter)	6.890 in 175.00 mm
C (Overall Race Width)	4.055 in 103.00 mm
D (Pitch Circle Diameter)	6.378 in 162.00 mm
E (Outer Race I.D.)	5.709 in 145.00 mm
F (Inner Race O.D.)	3.740 in 95.00 mm
G (Counter Bore Depth)	0.339 in 8.60 mm
S (Thread Depth)	0.630 in 16.00 mm
H (Quantity)	8
M (Size x Pitch)	M8x1.25
Weight	29.040 lb 13.200 kg