
U.S. Tsubaki Power Transmission, LLC
301 E. Marquardt Dr.
Wheeling, IL 60090


Phone: 847.459.9500 or 800.323.7790
Fax: 847.459.9515

Email: sales@ustsubaki.com
Website: www.ustsubaki.com

ITEM # BB20GDK, BB-2GD-20 MM BORE CAM CLUTCH

BB-2GD Series Cam Clutches build upon the standard BB Series with the addition of complete rubber seals on both sides. The addition of rubber seals makes the BB-GD Series slightly wider (0.197", 5 mm) than the equivalent 62 Series ball bearing.

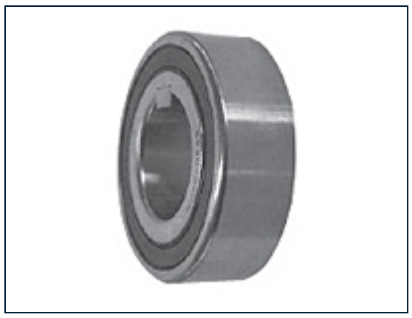

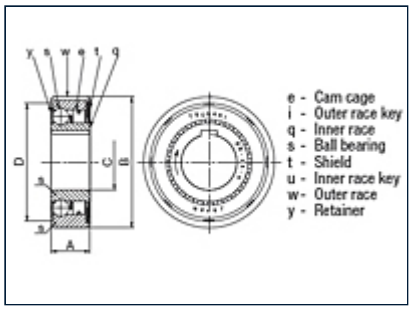

Specifications

Torque Capacity	45 lb·ft 61 N·m
Max. Overrunning Inner Race	3000 rpm
Max. Overrunning Outer Race	1600 rpm
Drag Torque	0.041 lb·ft 0.06 N·m
A (Overall Width)	0.748 in

	19.00 mm
B (Overall Diameter)	1.850 in 47.00 mm
C (Bore Size)	0.787 in 20.00 mm
D (Outer Race I.D.)	1.667 in 42.35 mm
S (Chamfer)	0.039 in 1.00 mm
Dynamic Bearing Loads	1911 lbf 8500 N
Static Bearing Loads	1102 lbf 4900 N
Construction	Rubber seals on both sides
Weight	0.300 lb 0.150 kg