
U.S. Tsubaki Power Transmission, LLC
301 E. Marquardt Dr.
Wheeling, IL 60090


Phone: 847.459.9500 or 800.323.7790
Fax: 847.459.9515

Email: sales@ustsubaki.com
Website: www.ustsubaki.com

ITEM # **BB40GDK**, BB-2GD-40 MM BORE CAM CLUTCH

BB-2GD Series Cam Clutches build upon the standard BB Series with the addition of complete rubber seals on both sides. The addition of rubber seals makes the BB-GD Series slightly wider (0.197", 5 mm) than the equivalent 62 Series ball bearing.

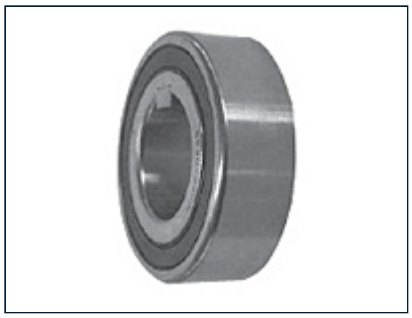

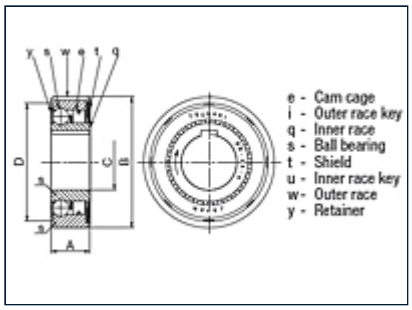

Specifications

Torque Capacity	192.0 lb·ft 260.0 N·m
Max. Overrunning Inner Race	1800 rpm
Max. Overrunning Outer Race	900 rpm
Drag Torque	0.059 lb·ft 0.08 N·m
A (Overall Width)	1.063 in

	27.00 mm
B (Overall Diameter)	3.150 in 80.00 mm
C (Bore Size)	1.575 in 40.00 mm
D (Outer Race I.D.)	2.819 in 71.60 mm
S (Chamfer)	0.043 in 1.10 mm
Dynamic Bearing Loads	3260 lbf 14500 N
Static Bearing Loads	2630 lbf 11700 N
Construction	Rubber seals on both sides
Weight	1.300 lb 0.600 kg