U.S. Tsubaki Power Transmission, LLC
301 E. Marquardt Dr.
Wheeling, IL 60090


Phone: 847.459.9500 or 800.323.7790
Fax: 847.459.9515
Email: sales@ustsubaki.com

Website: www.ustsubaki.com

ITEM # MZEU15, MZEU-15 MM BORE CAM CLUTCH

MZEU Series is a general purpose Cam Clutch suitable for a wide variety of applications. A selection of add-on flanges and torque arms are available enabling this Cam Clutch to easily fit where custom designed products were previously required. MZEU12 to MZEU80 are pre-greased, requiring no lubrication. MZEU90 to MZEU150 require oil lubrication. Contact Tsubaki for indexing applications above 50 cycles per minute.



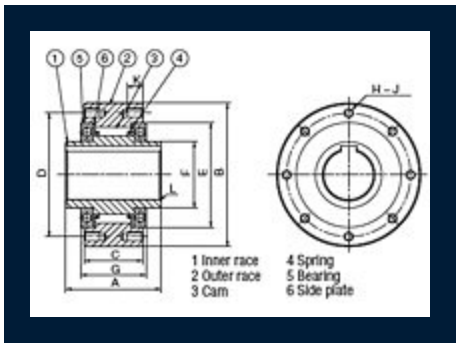

Specifications

Bore Size	0.591 in 15.00 mm
Torque Capacity	73.8 lb·ft 100.0 N·m
Max. Overrunning Shaft	1800 rpm
Max. Overrunning Outer Race	900 rpm
Drag Torque	0.148 lb·ft 0.20 N·m

Inner Race Keyway	5 x 2.3 mm
A (Overall Width)	2.047 in 52.00 mm
B (Overall Height)	2.677 in 68.00 mm
C (Outer Race Width)	1.102 in 28.00 mm
D (Bolt Circle Diameter)	2.205 in 56.00 mm
E (Outer Race I.D.)	1.850 in 47.00 mm
F (Inner Race O.D.)	0.984 in 25.00 mm
G (Cam Cage Width)	1.260 in 32.00 mm
J (Quantity)	3
H (Bolt Circle Tap)	M5
K (Thread Depth)	0.315 in 8.00 mm
L (Chamfer)	0.031 in 0.80 mm
Weight	1.760 lb 0.800 kg