

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.



## TECHNICAL DATA SHEET

# HIGH-CAPACITY WATER MOVER SERIES

### Model 314 Non-Submersible Utility Pump

#### PRODUCT SPECIFICATIONS

<b>MOTOR</b>	Horse Power	1/2
	Voltage	115
	Phase	1 Ph
	Hertz	60 Hz
<b>PUMP</b>	Operation	Nonautomatic
	Discharge Size	3/4" NPT brass or standard garden hose
	Cord Length	20' (6 m) standard
	Cord Type	grounded plug
	Max. Head	110' (33.5 m)
	Max. Flow Rate	1400 GPH (5300 LPH)
	Max. Operating Temp.	104° F (40° C)
<b>MATERIALS</b>	Cooling	Air
	Pump Housing	Cast iron
	Mechanical Seals	Carbon and ceramic
	Impeller	Engineered plastic
	Weight	17 lbs. (8 kg)

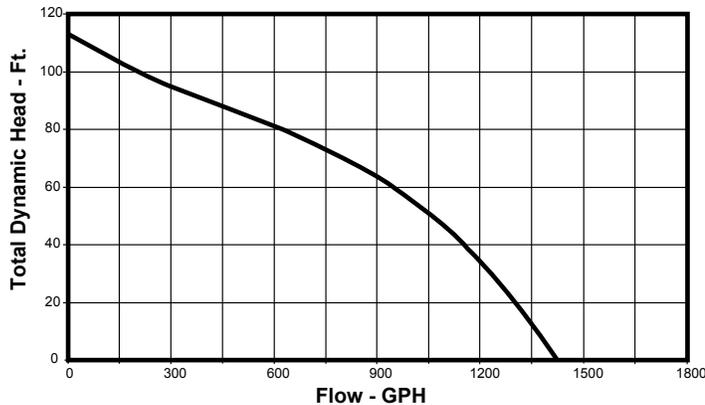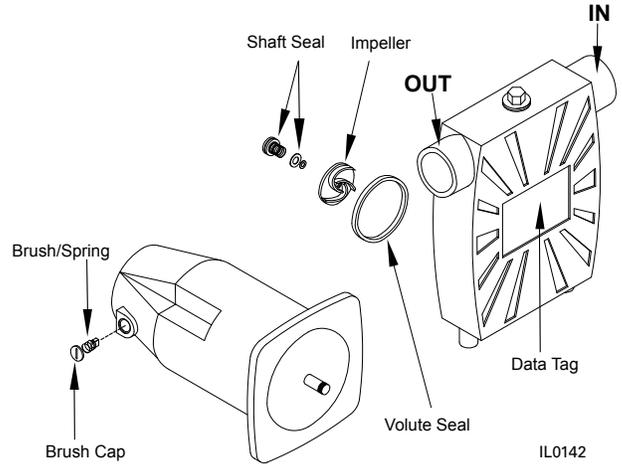

IL0153

#### TOTAL DYNAMIC HEAD FLOW PER HOUR

Model	Volts	Max. Flow 1' (.3 m) Head	Shut-Off Head
314-0002	115 V	1400 GPH (5300 LPH)	110' (33.5 m)



NOTE: Each pump is equipped with a suction screen and an extra set of brushes



Tested to UL Standard 778 and Certified to CSA Standard 227875

