

Your Peace of Mind is Our Top Priority®

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.



PUMP COMPANY

Zoeller Family of Water Solutions™

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
 SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
 (502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

SECTION: 2.45.050

FM0454

0816

Supersedes

0514

visit our web site:
www.zoeller.com

910 SEWAGE SYSTEMS



Model 10-4012 shown.



Products may not be exactly as pictured.

OPTIONS: Zoeller recommends a High Water Alarm for added protection. See FM0732 for available models

910 - SIMPLEX & DUPLEX SEWAGE PACKAGE SYSTEMS (UNASSEMBLED)

Ideal for homes, farms, trailer courts, motels, restaurants and institutions where drain facilities are below existing sewer lines. Maximum Temperature rated at 130°F (54°C).

Model Number	Pump	Volts	Basin & Cover	Unicheck	Weight
910-0005*	M267	115V	Poly-Foam-18X30-2V2D	2" C.I.	77
910-0006*	D267	230V	Poly-Foam-18X30-2V2D	2" C.I.	77
910-0007*	M267	115V	Poly-Foam-18X30-3V2D	2" C.I.	77
910-0008*	D267	230V	Poly-Foam-18X30-3V2D	2" C.I.	77
910-0009†	M267	115V	Fiberglass-18X30-2V2D	2" C.I.	88
910-0016	M267	115V	Poly-18X30-2V2D	2" C.I.	83
910-0017*	M268	115V	Poly-Foam-18X30-3V3D	3" C.I.	92
910-0018*	M267	115V	Poly-18X30-2V2D	2" C.I.	82
910-0023	BN264	115V	Poly-18X30-2V2D	2" PVC	62
910-0024	BN267	115V	Poly-18X30-2V2D	2" PVC	76
910-0026	BN267	115V	Poly-Foam-18X30-2V2D	2" PVC	76
910-0030**	M264	115V	Duplex Poly-Foam-30X36-2V2D	2" Tri-check®	156
910-0031**	M267	115V	Duplex Poly-Foam-30X36-2V2D	2" Tri-check®	178

BASINS -

Polyethylene Structural Foam, Polyethylene or Fiberglass

* Split poly cover


† Split steel cover

**Duplex System is complete with (2) automatic pumps, (1) Smart Pak Plus residential alternator, (1) 30" x 36" duplex poly-foam basin and (2) 2" Tri-checks (check valve, ball valve and union all-in-one).

CHECK VALVES -

2" Cast Iron and 2" PVC full flow design.

Consult factory for other combinations and prices, including 2" and 3" vertical discharge and vent, 115V or 230V. Polyethylene basins recommended for indoor installations only.

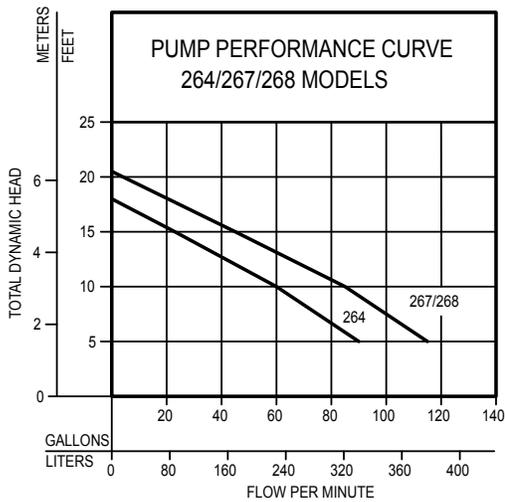

**TOTAL DYNAMIC HEAD/FLOW
PER MINUTE
SEWAGE AND DEWATERING**

MODELS		264		267/268	
Feet	Meters	Gal.	Liters	Gal.	Liters
5	1.5	90	341	115	435
10	3.0	60	227	85	322
15	4.6	23	87	45	170
Shut-off Head:		18 ft. (5.5m)		20.5 ft. (6.2m)	

009969B

Duplex System for Indoor Applications (unassembled)

(2) 2" Tri-Check® Valves



10-0804 Duplex Alternator



Duplex Basin with (2) Automatic Pumps



Indoor Sewage Applications Only
910-0030 (M264 - 4/10 HP) or 910-0031 (M267 - 1/2 HP)

includes:

- ✓ (2) Automatic Pumps (M264 or M267) Model Pumps
- ✓ (1) 10-0804 Smart Pak Residential Alternator with Alarm
- ✓ (1) 31-1105 30" X 36" Poly-foam Basin with 2" Vent /Discharge
- ✓ (2) 30-0101 Tri-Check® Valves