

## Viega ProPress® Ball Valve - Zero Lead\* Model 2971.4 ZL

### Description

The Zero Lead bronze ball valve is equipped with a full port, Zero Lead bronze body. The ball valve features EPDM sealing elements, EPDM stem seals and Viega's Smart Connect® feature for easy identification of unpressed connections during pressure testing.

### Features


- 316 Stainless Steel Ball
- Eco Brass Blowout-proof Stem
- Lockable Metal Handle
- Reinforced PTFE Seats
- Smart Connect Feature
- Press x FPT connections

### Ratings


- 250 CWP
- Temperature Range: 0°F - 250°F
- Max. Operating Pressure: 250 psi

### Approvals

- Conforms to MSS SP-110
- NSF - UP Code
- NSF 61 Annex G
- ASME A112.4.14
- Listed by NSF to Commercial Hot

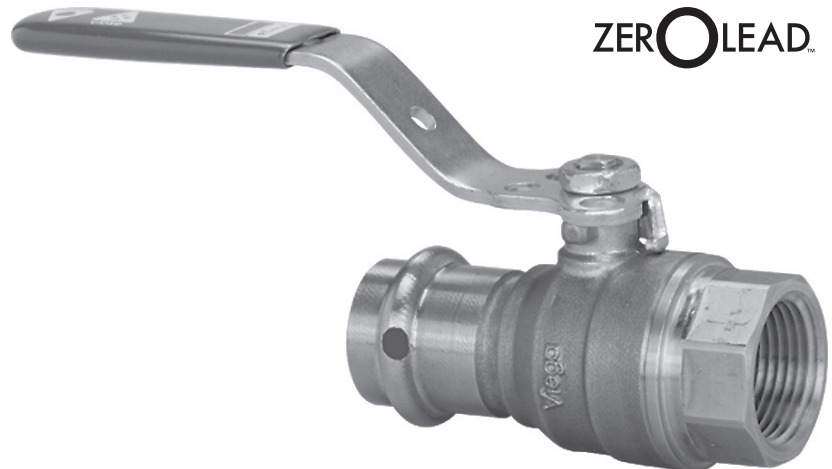

Component	Material
Body	Zero Lead Bronze C87700
Ball	316 Stainless Steel
Seat	Reinforced PTFE
Stem	Eco Brass C69300
Stem Seals	EPDM
Nut	Zinc plated Steel
Handle	Zinc plated Steel
Handle Cover	Polyvinyl
Sealing Element	EPDM

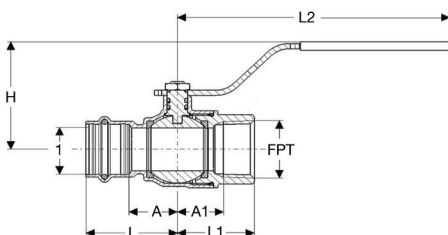

Product Number	Size 1 x FPT	Z (in)	Z1 (in)	L (in)	L1 (in)	L2 (in)	H (in)
79970	1/2" x 1/2"	0.73	0.66	1.57	1.20	4.57	1.97
79975	3/4" x 3/4"	0.85	0.79	1.75	1.35	4.57	2.09
79980	1" x 1"	1.02	0.98	1.93	1.63	5.75	2.46

\*Zero Lead identifies Viega® products meeting the lead free requirements of NSF 61-G through testing under NSF/ANSI 372 (0.25% or less maximum weighted average lead content).

This document subject to updates. For the most current Viega technical literature please visit [www.viega.us](http://www.viega.us).  
Click Services -> Click Electronic Literature Downloads -> Select Product Line -> Select Desired Document

**Viega LLC, 100 N. Broadway, 6<sup>th</sup> Floor • Wichita, KS 67202 • Ph: 800-976-9819 • Fax: 316-425-7618**

TD-PP 0116 (ZL Bronze Ball Valve 29714ZL)

1 of 1