

## Viega® PEX Crimp Stop Valves - Zero Lead™\*

### Description

Viega Zero Lead stop valves are available in straight and angled configurations. The valve bodies are manufactured from Eco Brass® and feature Teflon® seals with EPDM and FKM stem seals.

### Features

- Plated Brass Ball
- PTFE Seals
- Nickel Plated Brass Stem
- EPDM & FKM Stem Seals

### Ratings

- Temperature Range: 0°F - 180°F
- Max. Operating Pressure: 160 psi


### Approvals

-  - cCSAus
-  - UPC®
- NSF / ANSI 61-G
- NSF / ANSI 372
- ASTM F1807

ZERO LEAD™




Component	Material
Body	Chrome Plated Brass
Ball	Plated Brass
Seat	PTFE
Stem	Nickel Plated Brass
Stem Seals	EPDM & FKM
Handle	Nickel Plated Zinc

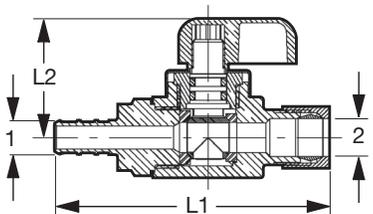

Viega PEX Crimp Stop Valve Straight Zero Lead Chrome Plated Brass Crimp x CTS ¼ Turn - Model V5026ZL

Part Number	Size	L1 (in)	L2 (in)
	1 2		
46001	3/8" x 1/4" CTS (3/8" OD) Comp	2.78	1.20
46022	1/2" x 1/4" CTS (3/8" OD) Comp	2.78	1.20

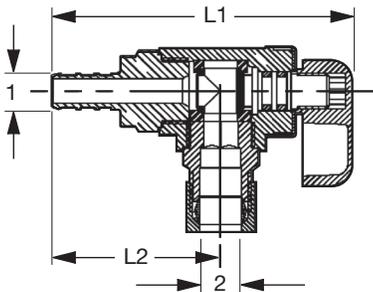

Viega PEX Crimp Stop Valve Angled Zero Lead Chrome Plated Brass Crimp x CTS ¼ Turn - Model V5064ZL

Part Number	Size	L1 (in)	L2 (in)
	1 2		
46002	3/8" x 1/4" CTS (3/8" OD) Comp	2.70	1.03
46025	1/2" x 1/4" CTS (3/8" OD) Comp	2.80	1.03

\*Zero Lead identifies Viega® products meeting the lead free requirements of NSF 61-G through testing under NSF/ANSI 372 (0.25% or less maximum weighted average lead content).

This document subject to updates. For the most current Viega technical literature please visit [www.viega.us](http://www.viega.us).  
Click Services -> Click Electronic Literature Downloads -> Select Product Line -> Select Desired Document