

Viega ProPress® Ball Valve Model 2973.1

Description

Viega ProPress model 2973.1 is a full port ball valve intended for hydronic and non-potable applications. The ball valve features EPDM sealing elements, EPDM stem seals and Viega's Smart Connect® feature for easy identification of unpressed connections during pressure testing.

Features

- Chrome-plated brass ball
- Blowout-proof stem
- Reinforced PTFE seats
- Smart Connect feature
- Press x FPT connections

Ratings


- 250 CWP
- Temperature range: 0°F - 250°F
- Max. operating pressure: 200 psi

Approvals

- Conforms to MSS SP-110
- NSF-U.P. Code
- IGC-157



Component	Material
Body	Brass C37700
Ball	Chrome-plated Brass
Seat	Reinforced PTFE
Stem	Brass C37700
Stem Seals	EPDM
Nut	Zinc-plated Steel
Handle	Zinc-plated Steel
Handle Cover	Polyvinyl
Sealing Element	EPDM

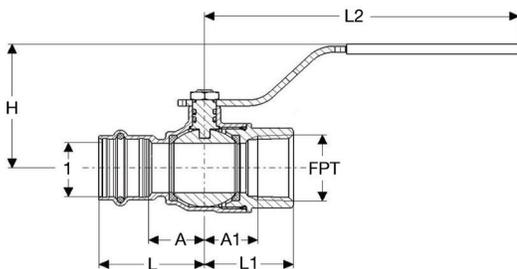

Part Number	1 x FPT	Z (in)	Z1 (in)	L (in)	L1 (in)	L2 (in)	H (in)
24030	½" x ½"	0.83	0.63	1.58	1.16	3.94	1.69
24035	¾" x ¾"	0.95	0.71	1.86	1.26	4.72	1.97
24040	1" x 1"	1.18	0.93	2.09	1.59	4.72	2.13

NOTE: Model 2973 is for use in non-potable applications. For NSF-61G compliant valves refer to Viega ProPress model 2971.4ZL.

This document subject to updates. For the most current Viega technical literature please visit www.viega.us.
Click Services -> Click Electronic Literature Downloads -> Select Product Line -> Select Desired Document

Viega LLC, 100 N. Broadway, 6th Floor • Wichita, KS 67202 • Ph: 800-976-9819 • Fax: 316-425-7618