


Class 600 Stainless Steel Y-Strainer "V Series"

MERIT
BRASS

APPLICABLE STANDARDS:

- Design: ASME B16.34
- Testing: API 598
- 200 PSI working pressure at 350°F

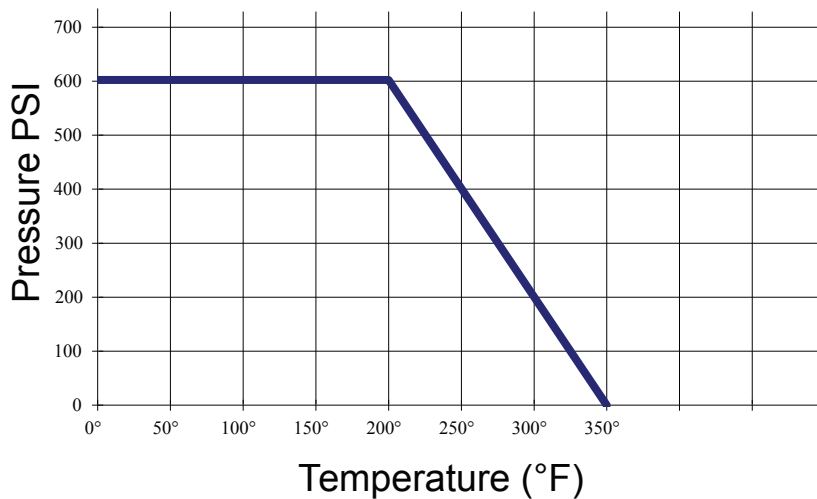


Cv, Weights & Port

Size	Cv	Wt (Lbs)	Port
1/4"	2.5	0.68	0.35
3/8"	2.5	0.68	0.35
1/2"	3.5	1.07	0.55
3/4"	5	1.46	0.67
1"	9	2.30	0.87
1-1/4"	16	3.64	1.06
1-1/2"	21	5.09	1.34
2"	40	8.17	1.65
2-1/2"	60	9.99	2.40
3"	75	13.92	2.99

Headquarters:
 One Merit Drive
 PO Box 43127
 Cleveland OH 44143
 TEL: 216 261 9800
 TOLL FREE TEL: 800 726 9800
 TOLL FREE FAX: 855 MBFAXIT (623 2948)
 Email: mbsales@meritbrass.com
 Websites: www.meritbrass.com
www.MBWebXpress.com

Class 600 Stainless Steel Y-Strainer "V Series"

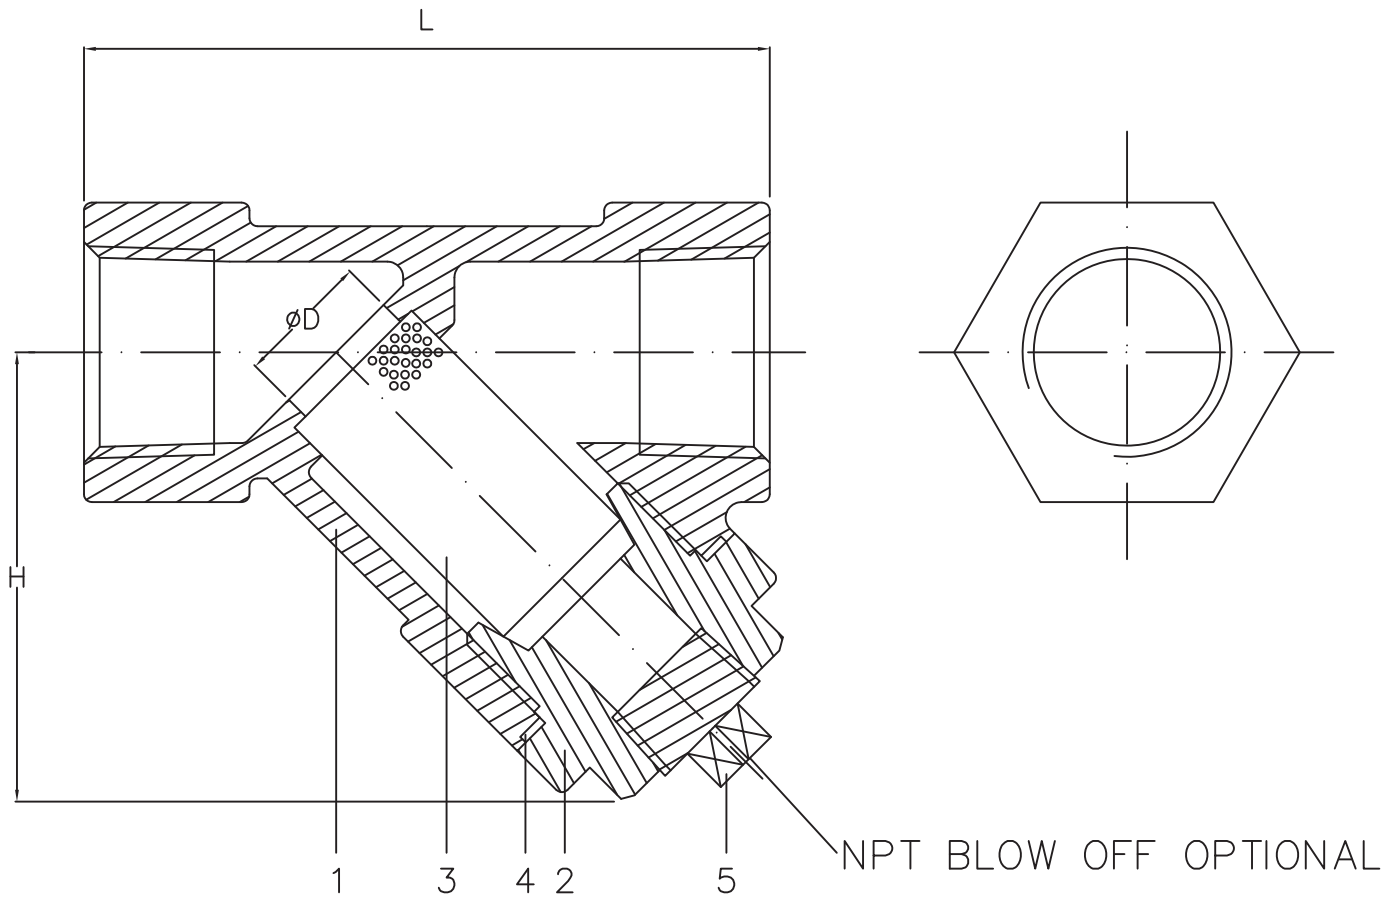

Unit: Inch

NO	PART NAME	QTY	MATERIAL
1	BODY	1	ASTM A351 CF8M
2	BONNET	2	ASTM A351 CF8M
3	SCREEN	1	SUS316 20 OR 40 MESH SCREEN
4	GASKET	1	PTFE
5	PLUG	1	SUS316

Size	D Port	L	H
1/4"	0.35	2.64	1.59
3/8"	0.35	2.64	1.59
1/2"	0.55	2.99	1.99
3/4"	0.67	3.43	2.21
1"	0.87	4.06	2.73
1-1/4"	1.06	4.72	3.13
1-1/2"	1.34	5.31	3.65
2"	1.65	6.30	4.24
2-1/2"	2.40	7.87	5.28
3"	2.99	8.86	5.72