

3 PHASE 125 AMP LOAD CENTER
50 AMP 2 POLE BREAKER
30 AMP GFI 1 POLE BREAKER
20 AMP 1 POLE BREAKER (2X)

14-50R
50 AMP
RECEPTACLE

BR32U
30 AMP
RECEPTACLE





GROUND

NEUTRAL

TERMINAL BAR

5-20R GFCI (2X)

37.2

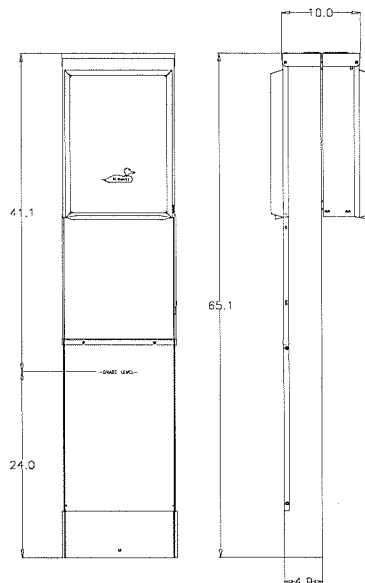


3 PHASE 125 AMP LOAD CENTER
50 AMP 2 POLE BREAKER
30 AMP GFI 1 POLE BREAKER
20 AMP 1 POLE BREAKER (2X)

14-50R
50 AMP
RECEPTACLE

BR32U
30 AMP
RECEPTACLE

5-20R GFCI (2X)



WIRE RANGE TABLE:

CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRAND	SOLID	STRAND
LINE	-----	6-350	-----	6-350
LOAD	-----	6-350	-----	6-350
NEUTRAL	-----	6-350	-----	6-350
EQUIP. GRND.	-----	6-350	-----	6-350

SH10

MIDWEST ELECTRIC
PRODUCTS, INC.
Mankato, MN



Dr. By: CLS

Ck. By:

CR: R0904042

* = Critical To Quality

Unless Otherwise
Specified

Tolerances On:
3 Pl. Decimals $\pm .010$
2 Pl. Decimals $\pm .030$
Fractions $\pm 1/32$
Angles $\pm 1/2^\circ$
Holes $\pm .003$

Dimensions Are In Inches

AutoCad
Generated

SCALE

1 : 1

SIZE

A

SHEET 1 OF 1

TITLE:

5S3S2S2SEB
OUTLINE

DWG NO:

265A6260

Rev.1 CR R0904042 CLS 1-31-11

Rev.2 CR R1205610 CLS 4-2-12

X