

R32U 30AMP, RECEPTACLE
 125AMP, LOAD CENTER
 50AMP, THINLINE BREAKER 1-POLE (4X)
 30AMP, BREAKER 1-POLE
 20AMP, THINLINE BREAKER 1-POLE

14-50R 50AMP, RECEPTACLE (2X)

LOOP FEED LUG TERMINAL BAR


5-20R2GFI
 20AMP,
 GFI DUPLEX

WIRE RANGE TABLE :





CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRAND	SOLID	STRAND
LINE	---	6-2/0	---	6-2/0
LOAD	14-10	14-10	---	---
NEUTRAL	14-4	14-4	14-4	14-4
EQUIP. GRND.	12-8	12-2	12-8	12-2
POST LINE CONNECTORS SUITABLE FOR LOOP FEED	#1-300	KCMIL	#1-300	KCMIL
EQUIP. GRND.	12-2	12-2	12-2	12-2

18.9

1/2"x15/16"
 MOUNTING HOLE
 (4X)




NOTES: PAD MOUNTED POST

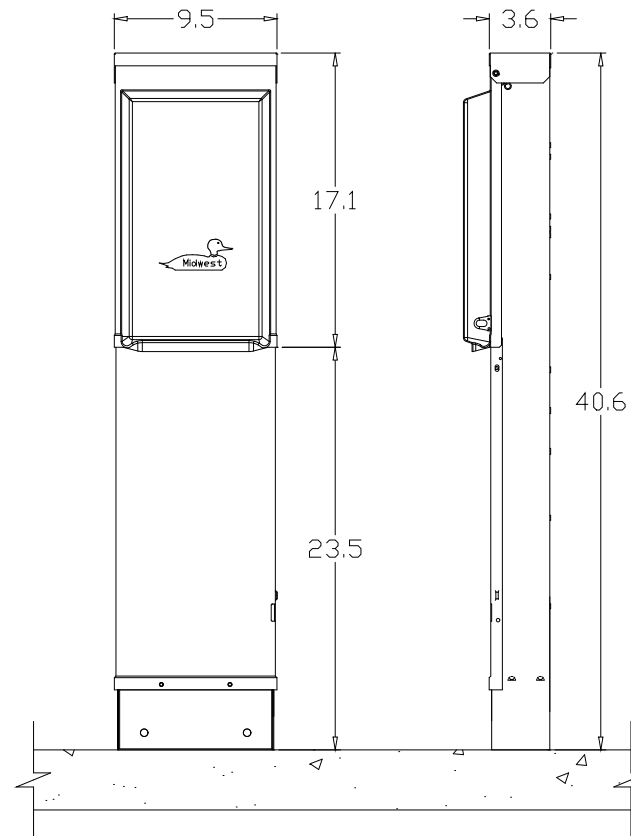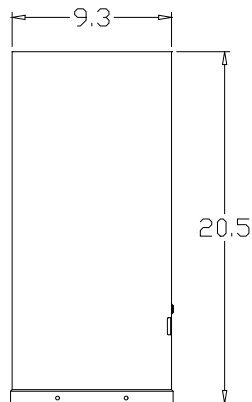

SH30

MIDWEST ELECTRIC
 PRODUCTS, INC.
 Mankato, MN



Dr. By: JDE

Ck. By:

CR: R0746956

* = Critical To Quality

Unless Otherwise
 Specified

Tolerances On:
 3 Pl. Decimals ± .010
 2 Pl. Decimals ± .030
 Fractions ± 1/32
 Angles ± 1/2°
 Holes ± .003

Dimensions Are In Inches

AutoCad
 Generated

SCALE
 1 : 1

SIZE
 A

SHEET 1 OF 1

TITLE: U775CP4010
 OUTLINE DRAWING

DWG NO:

198B8604

Rev.1 CR R0746956 JDE 1-14-08