
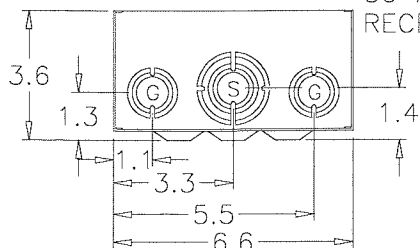
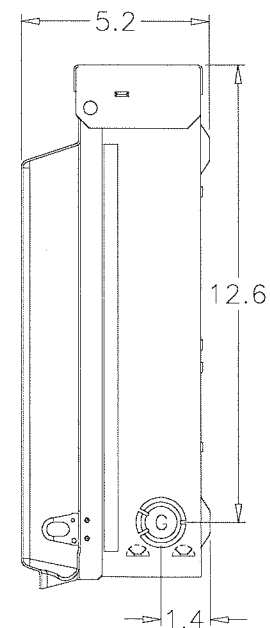
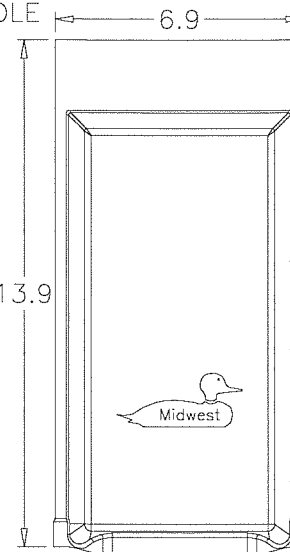
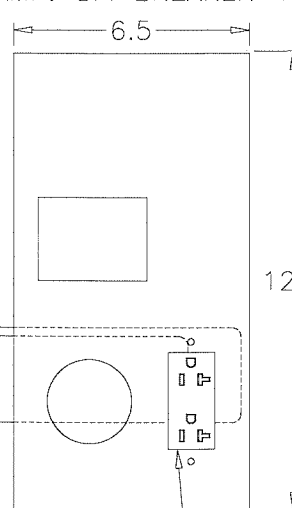
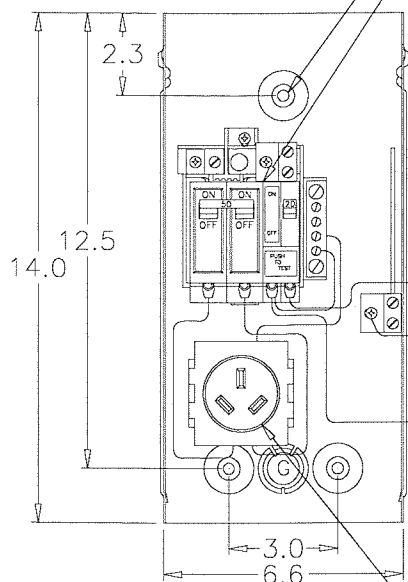


KNOCKOUT TABLE:

S= 1/2", 3/4", 1", 1-1/4", 1-1/2" KO
G= 1/2", 3/4", 1" KO

5/16" MOUNTING HOLE (3X)
 3 CIRCUIT 70 AMP LOAD CENTER
 50 AMP. BREAKER 2-POLE
 20 AMP. GFI BREAKER 1-POLE

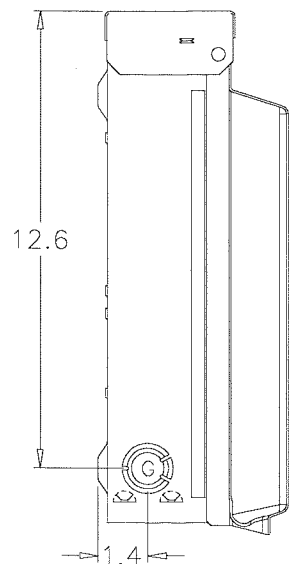

10-50R
 50 AMP.
 RECEPTACLE


5-20R2
 20 AMP
 DUPLEX

WIRE RANGE TABLE:

CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRAND	SOLID	STRAND
LINE	14-8	14-2	12-8	12-2
LOAD	14-10	14-10	-----	-----
NEUTRAL END HOLE	14-8	14-2	12-8	12-2
NEUTRAL SIDE HOLE	14-8	14-4	12-8	12-4
EQUIP. GRND.	12-8	12-2	12-8	12-2

SH21

MIDWEST ELECTRIC
 PRODUCTS, INC.
 Mankato, MN



Dr. By: JDE

Ck. By:

CR: R0814112

* = Critical To Quality

Unless Otherwise Specified

Tolerances On:
 3 Pl. Decimals ± .010
 2 Pl. Decimals ± .030
 Fractions ± 1/32
 Angles ± 1/2°
 Holes ± .003

Dimensions Are In Inches

AutoCad
 Generated

SCALE
 1 : 1

SIZE
 A

TITLE:

U051G
 OUTLINE DRAWING

DWG NO:

265A6213

SHEET 1 OF 1