
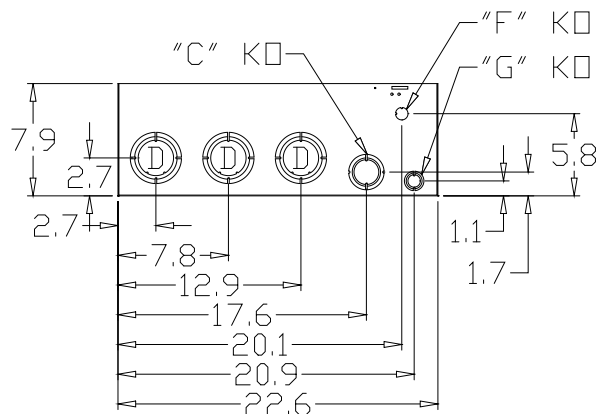
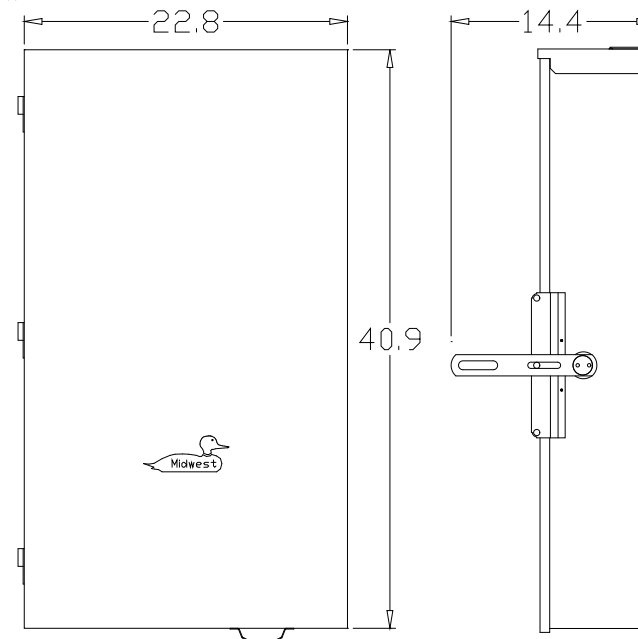
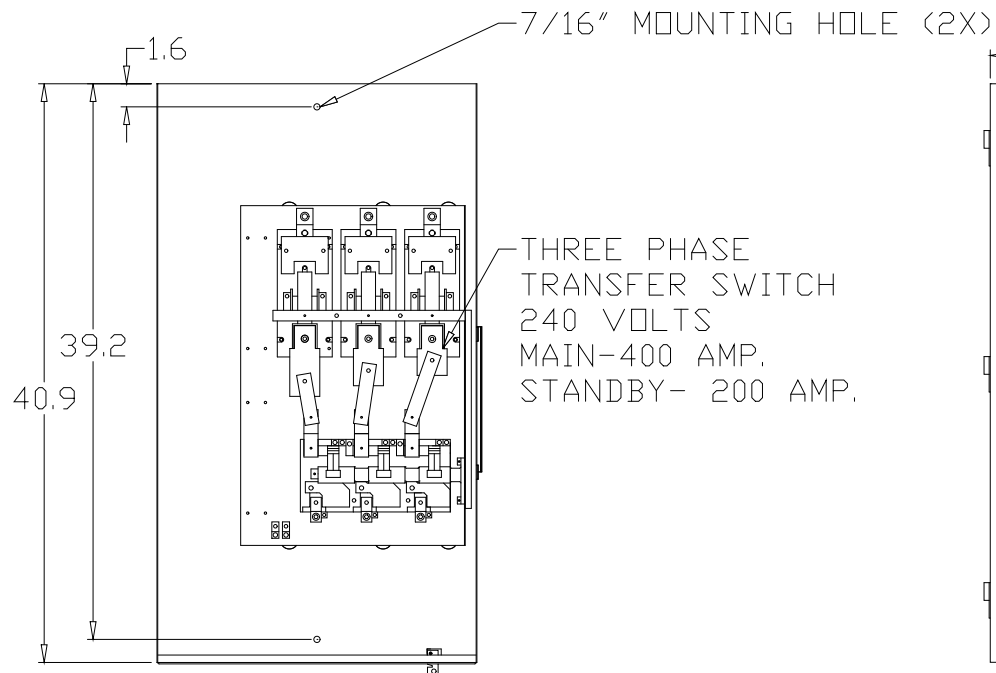


2-1/2" HUB HOLE (2X)

NOTES:

- USE ONE #6-250 MCM CU/AL WIRE PER LUG FOR 200 AMP SWITCH AND TWO #1/0-250MCM CU/AL WIRES PER LUG FOR 400 AMP SWITCH.

- EQUIP. GRD.-#14-1/0 CU/AL

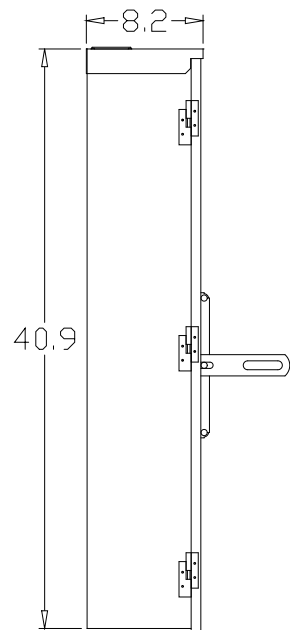

KNOCKOUT TABLE:

F= 1/2" KO
G= 1/2", 3/4", 1" KO
C= 1-1/4", 1-1/2", 2" KO
D= 2", 2-1/2", 3" KO

SH6

MIDWEST ELECTRIC
PRODUCTS, INC.
Mankato, MN



Dr. By: JDE

Ck. By:

CR: R0815611

* = Critical To Quality

Unless Otherwise
Specified

Tolerances On:
3 Pl. Decimals ± .010
2 Pl. Decimals ± .030
Fractions ± 1/32
Angles ± 1/2°
Holes ± .003

Dimensions Are In Inches

AutoCad
Generated

SCALE
1 : 1

SIZE
A

SHEET 1 OF 1

TITLE: GS3402B01UL
OUTLINE DRAWING

DWG NO:

265A6102