
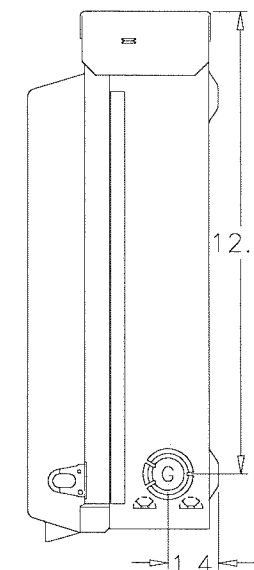
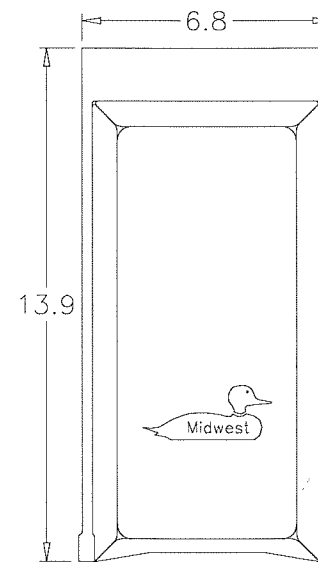
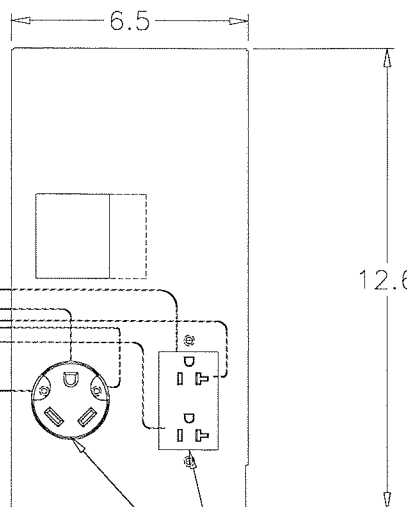
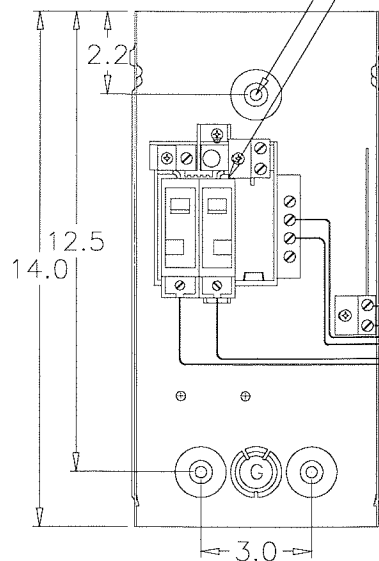



WIRE RANGE TABLE:

CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRAND	SOLID	STRAND
LINE	14-8	14-2	12-8	12-2
LOAD	14-10	14-10	-----	-----
NEUTRAL END HOLE	14-8	14-2	12-8	12-2
NEUTRAL SIDE HOLE	14-8	14-4	12-8	12-4
EQUIP. GRND.	12-8	12-2	12-8	12-2

5/16" MOUNTING HOLES (3X)
 3 CIRCUIT 70 AMP LOAD CENTER
 30 AMP CIRCUIT BREAKER 1-POLE
 20 AMP CIRCUIT BREAKER 1-POLE

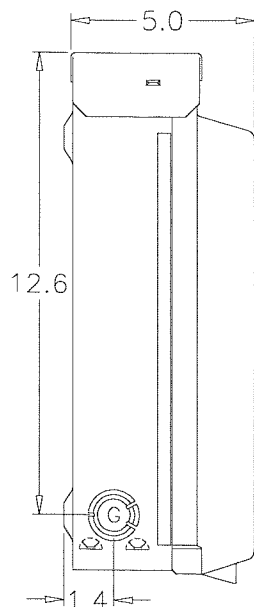

5-20R2 DUPLEX
 R32U RECEPTACLE

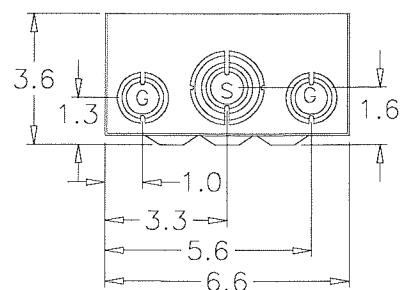

KNOCKOUT TABLE:


S= 1/2", 3/4", 1", 1-1/4", 1-1/2" KO
G= 1/2", 3/4", 1" KO

SH37

Y

X

MIDWEST ELECTRIC
 PRODUCTS, INC.
 Mankato, MN



Dr. By: JDE
 Ck. By:
 CR: R0814112

* = Critical To Quality
 Unless Otherwise Specified
 Tolerances On:
 3 Pl. Decimals ± .010
 2 Pl. Decimals ± .030
 Fractions ± 1/32
 Angles ± 1/2°
 Holes ± .003
 Dimensions Are In Inches

AutoCad
 Generated

SCALE
 1 : 1

SIZE
 A

SHEET 1 OF 1

TITLE: U041C
 OUTLINE DRAWING

DWG NO:
 265A6213

Rev.1 CR R0814112 JE 2-20-08
 Rev.2 CR R1111415 CLS 8-8-11