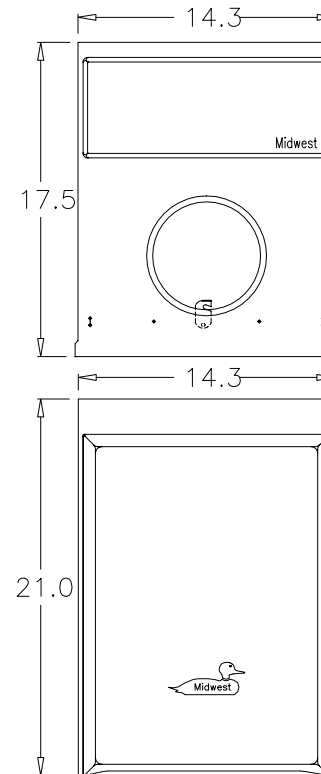
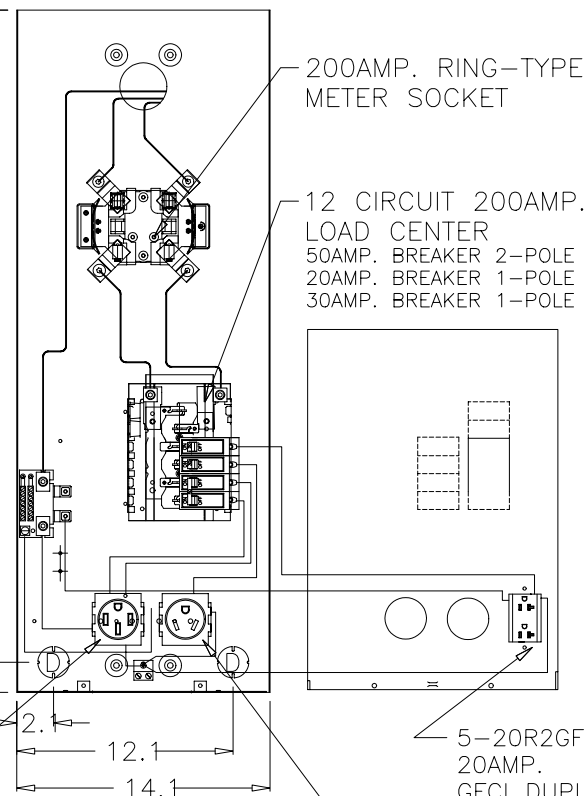

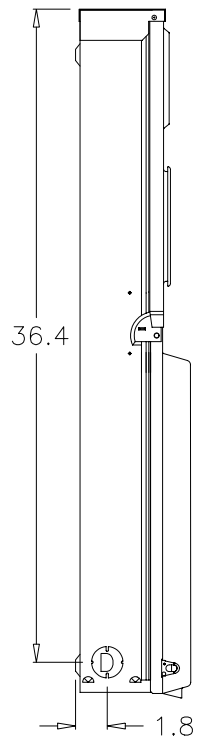


14-50R
50AMP.
RECEPTACLE

5-20R2GFI
20AMP.
GFCI DUPLEX
WITH GROUND WIRE
WEATHER/TAMPER RESISTANT


BR32U
30AMP.
RECEPTACLE

WIRE RANGE TABLE:

CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRAND	SOLID	STRAND
LINE	-----	1/0-250	-----	1/0-250
LOAD	14-10	14-10	-----	-----
NEUTRAL	-----	2-250	-----	2-250
NEUTRAL	14-8	14-1/0	12-8	12-1/0
NEUTRAL	14-8	10-4	-----	12-8
NEUTRAL	14-8	12-8	12-8	12-8
EQUIP. GRND.	12-8	12-2	12-8	12-2
POST LINE CONNECTORS SUITABLE FOR LOOP FEED	6-350 KCMIL		6-350 KCMIL	

KNOCKOUT TABLE:

C = 1-1/4", 1-1/2", 2" KO
A = 1-1/2", 2", 2-1/2" KO
E = 3/4" KO
Q = 1" KO
D = 3/4", 1", 1-1/4" KO

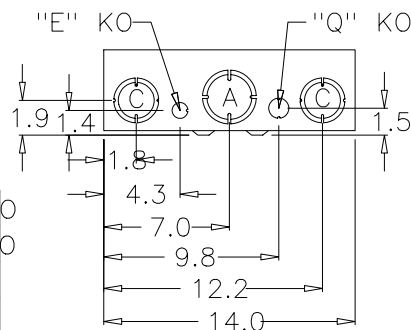

SH54

Rev. 1 CR R0836114 BK 01/06/09

AutoCad Generated	
Dr. By: BK	Date: 01/06/09
Ck. By:	Date:


MIDWEST ELECTRIC
PRODUCTS, INC.
Mankato, MN



Unless Otherwise Specified
Tolerances On:
3 Pl. Decimals ± .010
2 Pl. Decimals ± .030
Fractions ± 1/32
Angles ± 1/2°
Holes ± .003
Dimensions Are In Inches

* = Critical To Quality	
SCALE 1 : 1	SIZE B
SHEET 1	OF 2

TITLE: M675CP6010 HEAD OUTLINE	DWG NO: 198B8610
--------------------------------------	---------------------

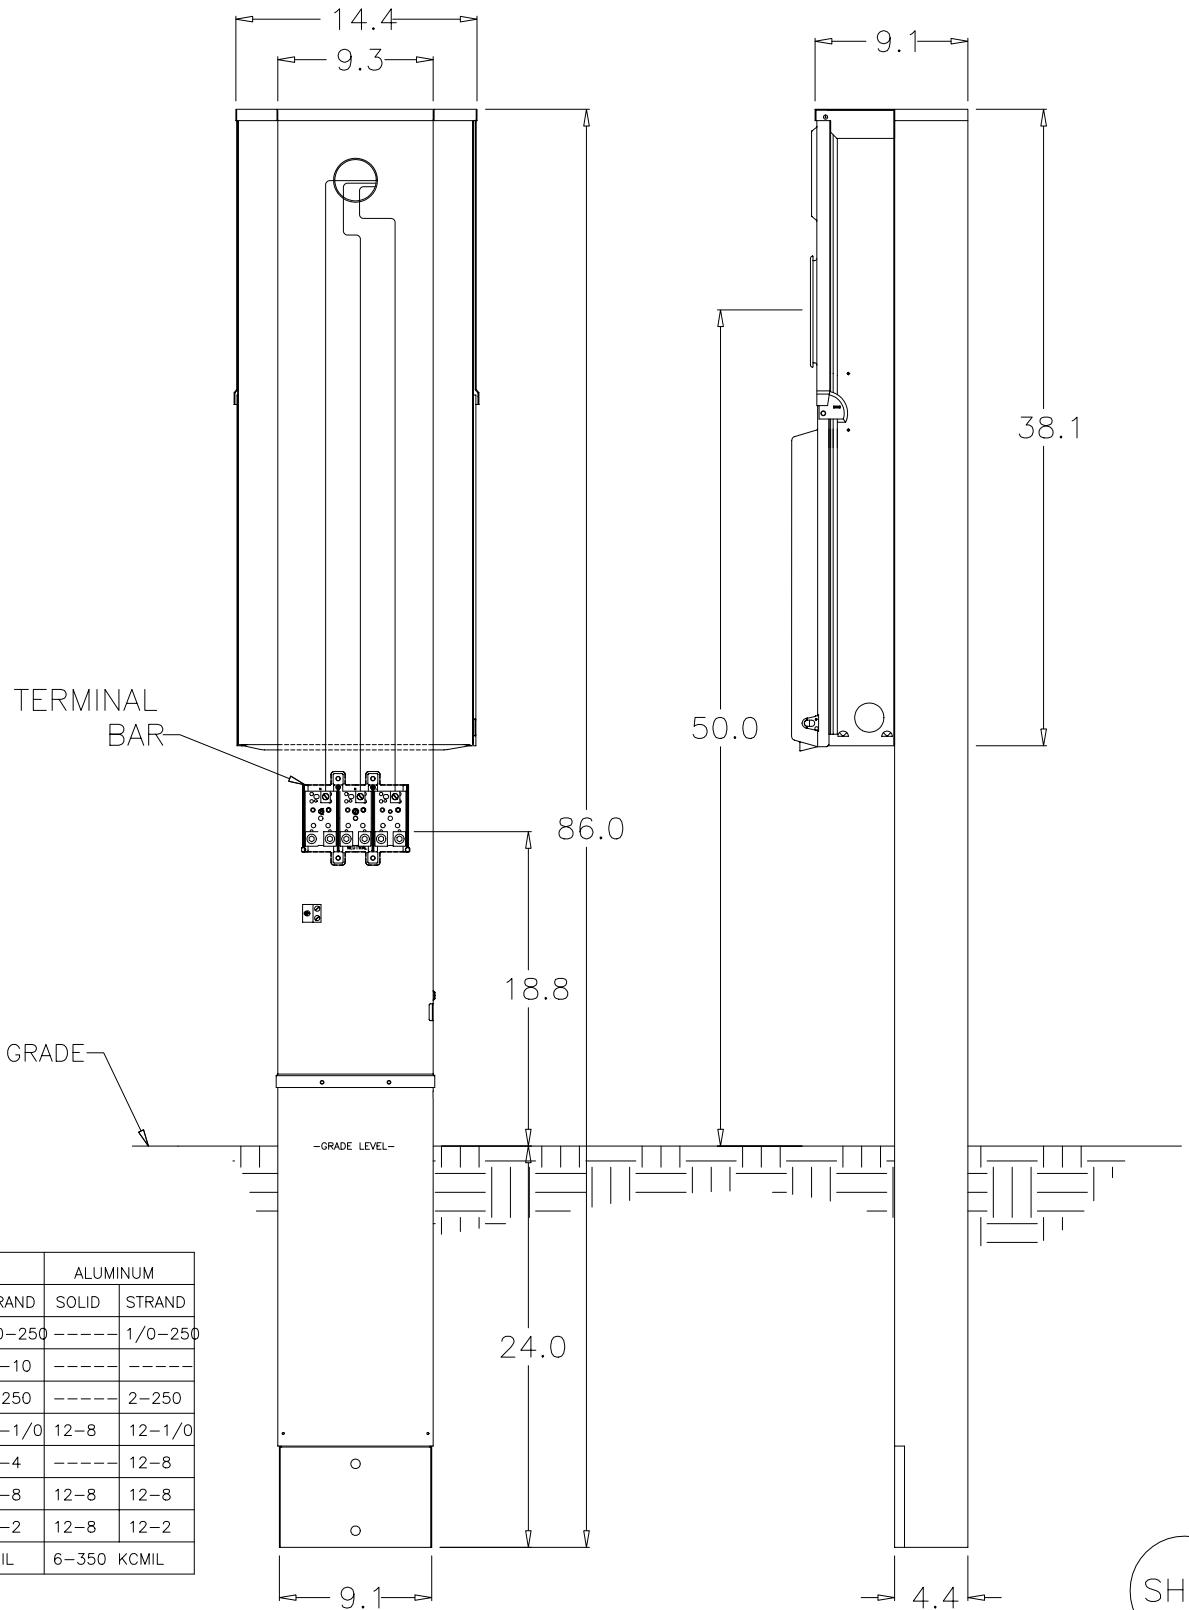

WIRE RANGE TABLE:

CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRAND	SOLID	STRAND
LINE	-----	1/0-250	-----	1/0-250
LOAD	14-10	14-10	-----	-----
NEUTRAL	-----	2-250	-----	2-250
NEUTRAL	14-8	14-1/0	12-8	12-1/0
NEUTRAL	14-8	10-4	-----	12-8
NEUTRAL	14-8	12-8	12-8	12-8
EQUIP. GRND.	12-8	12-2	12-8	12-2
POST LINE CONNECTORS SUITABLE FOR LOOP FEED	6-350 KCMIL		6-350 KCMIL	

MIDWEST ELECTRIC
PRODUCTS, INC.
Mankato, MN

BK

Ck. By:

CR: R0836114

* = Critical To Quality

Unless Otherwise Specified

AutoCad Generated

Tolerances On:
3 Pl. Decimals $\pm .010$
2 Pl. Decimals $\pm .030$
Fractions $\pm 1/32$
Angles $\pm 1/2^\circ$
Holes $\pm .003$

SCALE 1 : 1

SIZE A

SHEET 2 OF 2

Dimensions Are In Inches

TITLE: M675CP6010
POST/HEAD OUTLINE

DWG NO: 198B8610

Rev.1 CR R0836114 BK 01/06/09

SH54