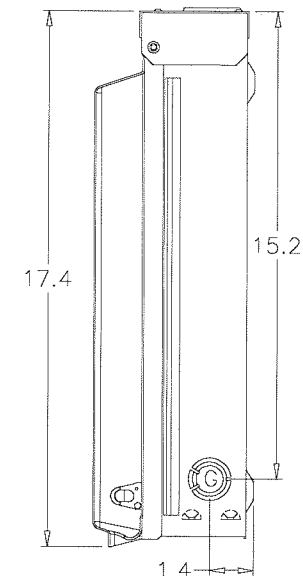
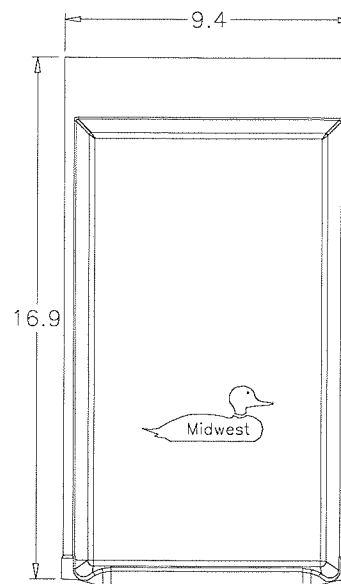
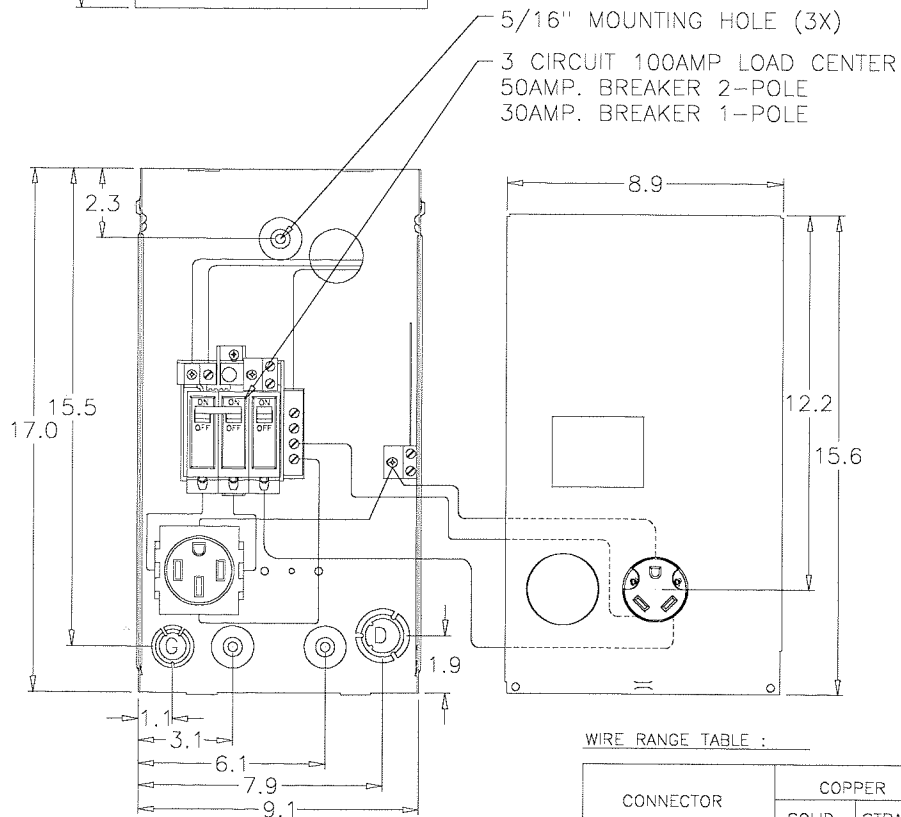
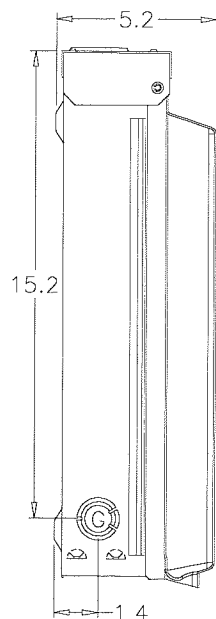
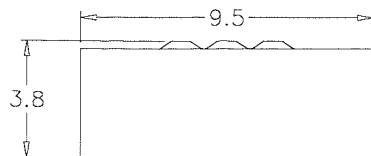


WIRE RANGE TABLE :

CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRAND	SOLID	STRAND
LINE	14-8	14-1/0	12-8	12-1/0
LOAD	---	---	---	---
NEUTRAL	LARGE HOLE	12-8	12-1/0	10-8
NEUTRAL	SMALL HOLE	14-8	14-4	12-8
EQUIP. GRND.		12-8	12-2	12-2
POST LINE CONNECTORS SUITABLE FOR LOOP FEED	#6-350 KCMIL		#6-350 KCMIL	
EQUIP. GRND.	12-2	12-2	12-2	12-2

KNOCKOUT TABLE:

G= 1/2", 3/4", 1" KO
D= 3/4", 1", 1-1/4" KO
B= 1", 1-1/4", 1-1/2" KO
H= 9/32" KO

SH42

Y

AutoCad Generated

Dr. By: JDE Date: 1-15-08
Ck. By: Date:

MIDWEST ELECTRIC
PRODUCTS, INC.
Mankato, MN



Unless Otherwise Specified
Tolerances On:
3 Pl. Decimals $\pm .010$
2 Pl. Decimals $\pm .030$
Fractions $\pm 1/32$
Angles $\pm 1/2^\circ$
Holes $\pm .003$
Dimensions Are In Inches

* = Critical To Quality
SCALE 1 : 1
SIZE B
SHEET 1 OF 2

TITLE: U058CB6
HEAD OUTLINE
DWG NO: 198B8604

100AMP. 3 CIRCUIT
LOAD CENTER
50AMP. BREAKER 2-POLE
30AMP. BREAKER 1-POLE

14-50R
50AMP.
RECEPTACLE

R32U
30AMP.
RECEPTACLE

WIRE RANGE TABLE :

CONNECTOR		COPPER		ALUMINUM	
		SOLID	STRAND	SOLID	STRAND
LINE		14-8	14-1/0	12-8	12-1/0
LOAD		---	---	---	---
NEUTRAL	LARGE HOLE	12-8	12-1/0	10-8	10-1/0
NEUTRAL	SMALL HOLE	14-8	14-4	12-8	12-4
EQUIP. GRND.		12-8	12-2	12-8	12-2
POST LINE CONNECTORS SUITABLE FOR LOOP FEED		#6-350 KCMIL		#6-350 KCMIL	
EQUIP. GRND.		12-2	12-2	12-2	12-2

43.4

8.9
15.6

9.3
20.9

9.3
22.0

-GRADE LEVEL-

POST
HEAD

HEAD
POST

8.4

9.5

41.1

65.1

GRADE

-GRADE LEVEL-

24.0

SH42

Y

AutoCad X Generated

Dr. By: JDE Date: 1-15-08
Ck. By: Date:

MIDWEST ELECTRIC
PRODUCTS, INC.
Mankato, MN



Unless Otherwise
Specified

Tolerances On:
3 Pl. Decimals $\pm .010$
2 Pl. Decimals $\pm .030$
Fractions $\pm 1/32$
Angles $\pm 1/2^\circ$
Holes $\pm .003$
Dimensions Are In Inches

* = Critical To
Quality

SCALE SIZE
1 : 1 B
SHEET 2 OF 2

TITLE:

U058CB6
POST/ HEAD OUTLINE

DWG NO:

198B8604