
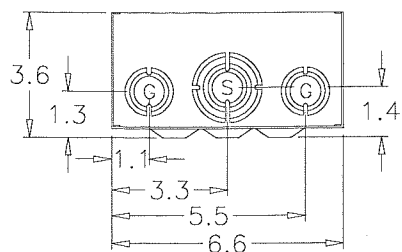
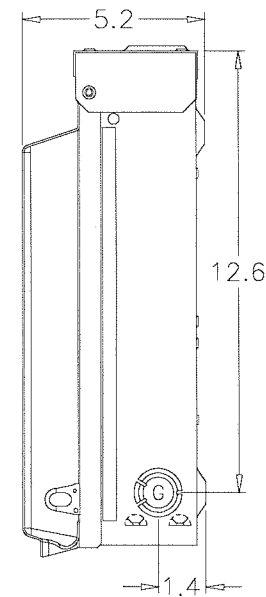
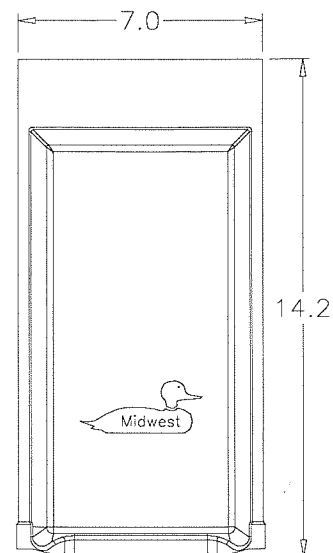
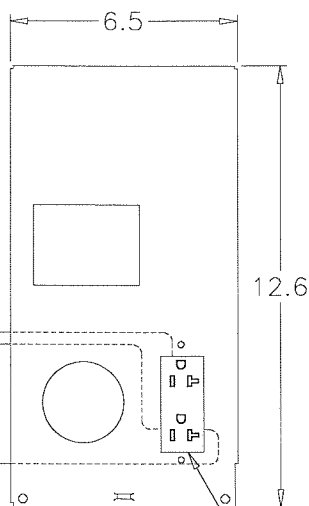
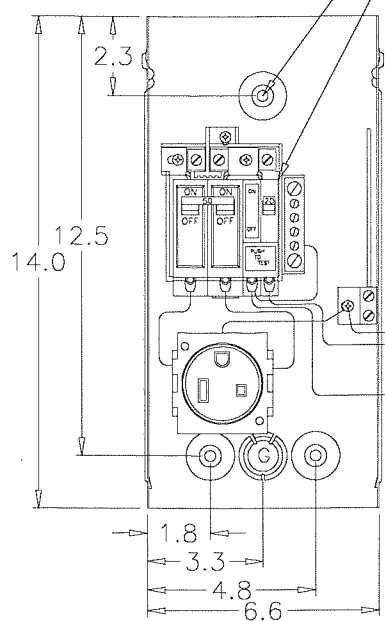


5/16" MOUNTING HOLE (3X)
 70AMP. 3 CIRCUIT LOAD CENTER
 50AMP. BREAKER 2-POLE
 20AMP. GFI BREAKER 1-POLE

KNOCKOUT TABLE:


S= 1/2", 3/4", 1", 1-1/4", 1-1/2" KO
G= 1/2", 3/4", 1" KO

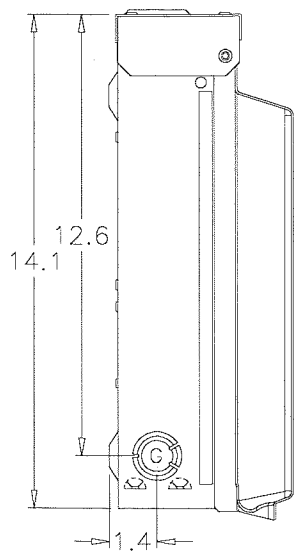

WIRE RANGE TABLE:

CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRAND	SOLID	STRAND
LINE	14-8	14-2	12-8	12-2
LOAD	14-10	14-10	-----	-----
NEUTRAL END HOLE	14-8	14-2	12-8	12-2
NEUTRAL SIDE HOLE	14-8	14-4	12-8	12-4
EQUIP. GRND	12-8	12-2	12-8	12-2

MIDWEST ELECTRIC
 PRODUCTS, INC.
 Mankato, MN



Dr. By: JDE
 Ck. By:
 CR: ROB14112

* = Critical To Quality

Unless Otherwise
 Specified

Tolerances On:
 3 Pl. Decimals ± .010
 2 Pl. Decimals ± .030
 Fractions ± 1/32
 Angles ± 1/2°
 Holes ± .003

Dimensions Are In Inches

AutoCad
 Generated

SCALE
 1 : 1

SIZE
 A

SHEET 1 OF 1

TITLE:

U511G
 OUTLINE DRAWING

DWG NO:

265A6213

SH27

Rev.1 CR ROB14112 JE 2-20-08
 Rev.2 CR RT113786 CLS 2-13-12

X