
Metallics

An AMERICAN Source For Premier and Innovative Fasteners and Anchors

BUGLE HEAD STAR DRIVE TYPE 17 DECK SCREW – STEEL YELLOW ZINC

The following Specification Sheet applies to all **Bugle Head Star Drive Type 17 Deck Screw – Steel Yellow Zinc** in our **RSDS series**.

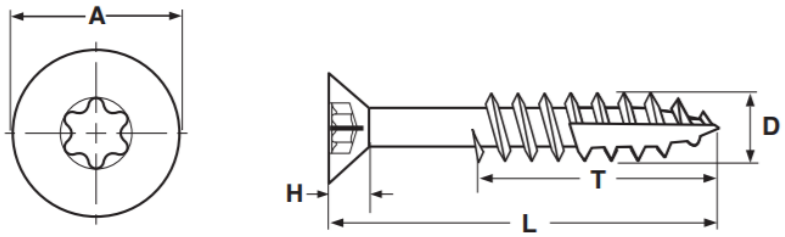

FLAT SIX-LOBE COARSE THREAD DECK SCREWS

Screw Size	Threads per Inch	A Head Diameter		D Major Diameter		H Head Height	Drive Size
		Max	Min	Max	Min	Max	
8	9	0.331	0.285	0.185	0.165	0.108	T20
9	9	0.358	0.316	0.197	0.180	0.124	T25
10	8	0.384	0.339	0.208	0.192	0.124	T25

Tolerance on Length	Up to 5/8": +0, -.03	Over 5/8 thru 1":+0, -.05	Over 1 thru 1.5":+0, -.05	Over 1.5 thru 2.75":+0, -.06	Over 2.75":+0,-.09

In the absence of a single industry standard for Deck Screws, these dimensions are offered as a guide; slight deviations are acceptable.

Description	An externally threaded fastener with a countersunk head, six-lobe recess and a single lead thread. The bearing surface of the countersink has several equidistant nibs running down the underside of the head from the top, outer edge. The shank has a full body diameter and a chip cavity cut out where the final several threads end at the tip.
Applications / Advantages	The deeper thread design offers greater resistance to pull-out forces. The chip cavity (or auger point) enables the fastener to drive—especially in denser woods—without pre-drilling a pilot hole.
Material	1018 - 1022 Steel
Plating	See Appendix-A for plating information.

Metallics
229 Cross Street
Bristol, CT 06010
www.metallics.us
Phone: 860 589-4186 Toll Free: 800 243-8272
Fax: 860 584-1008 Toll Free Fax: 800 831-9358