Metallics

An AMERICAN Source For Premier and Innovative Fasteners and Anchors

SPLIT LOCK WASHERS – GALVANIZED

The following Specification Sheet applies to all **Split Lock Washers – Galvanized** in our **JLW series**.

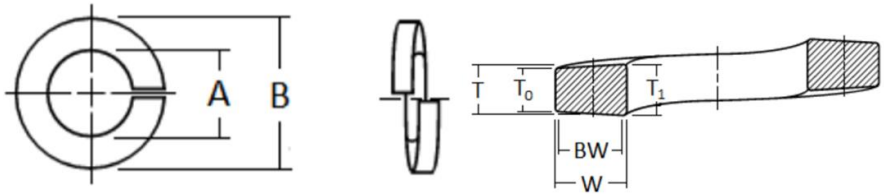

Nominal Washer Size	A		B	T	W	BW
	Inside Diameter		Outside Diameter	Mean Section Thickness $(t_1+T_0)/2$	Section Width	Bearing Width
	Max.	Min.	Max.	Min.	Min.	Min.
1/4	.260	.252	.487	.062	.109	.076
5/16	.322	.314	.583	.078	.125	.087
3/8	.385	.377	.680	.094	.141	.099
1/2	.512	.502	.869	.125	.171	.120
5/8	.641	.628	1.073	.156	.203	.142
3/4	.766	.753	1.265	.188	.234	.164

Specification Requirements:

- Dimensions: ASME B18.21.1
- Material: Carbon Steel per SAE J403 1055-1065 or equivalent.
- Hardness: HRC 38 to 46
- Finish: Hot Dip Galvanize per ASTM A153/A153M or ASTM F2329/F2329M

Metallics
229 Cross Street
Bristol, CT 06010
www.metallics.us
Phone: 860 589-4186 Toll Free: 800 243-8272
Fax: 860 584-1008 Toll Free Fax: 800 831-9358