


Metallics

An **AMERICAN** Source For Premier
and Innovative Fasteners and Anchors

FLAT HEAD MACHINE SCREWS – BRASS

The following Specification Sheet applies to all **Brass, Flat Head Machine Screws** in our **FMB** series of screws.

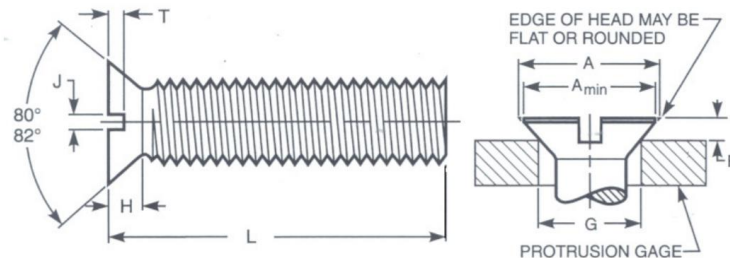

Nominal Size or Basic Screw Diameter		A		H	J		T		F		G
		Head Diameter		Head Height	Slot Width		Sloth Depth		Protrusion Above Gaging Diameter		Gaging Diameter
		Max.	Min.	Ref.	Max.	Min.	Max.	Min.	Max.	Min.	
8	.1640	.312	.285	.100	.054	.045	.045	.029	.039	.023	.267
10	.1900	.362	.333	.116	.060	.050	.053	.034	.042	.025	.313
1/4	.2500	.477	.442	.153	.075	.064	.070	.046	.050	.029	.424

Specification Requirements:

- Standard: ASME B18.6.3 **Exception: screws 6 inches and shorter are fully threaded.
- Drive Style: Slotted
- Material: In compliance with current RoHS European Union Directive
In addition, minimum Copper content 57%, maximum alloying elements 5%, remainder zinc.
- Thread Requirements: ASME B1.1 UNC & UNF Class 2A.

Metallics

229 Cross Street
Bristol, CT 06010

www.metallics.us

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358