


Metallics

An **AMERICAN** Source For Premier
and Innovative Fasteners and Anchors

SOCKET FLAT HEAD CAP SCREWS

The following Specification Sheet applies to all **Socket Flat Head Cap Screws** in our **FSC** series of screws.

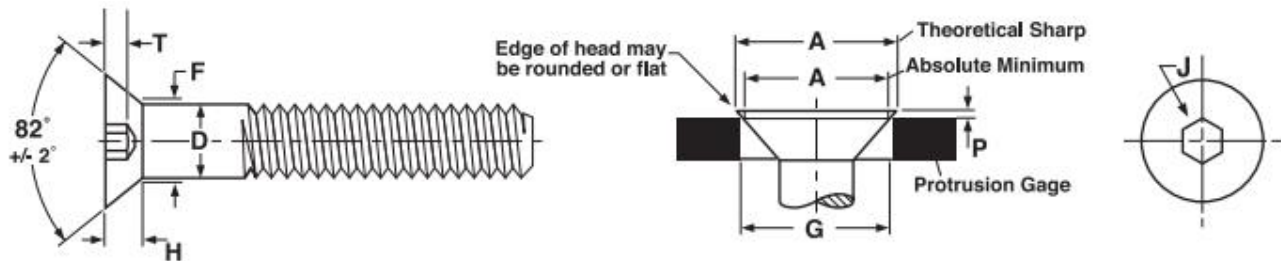

SOCKET FLAT HEAD CAP SCREWS - ALLOY STEEL													ASME B18.3-2012, Blue Devil®			
Nominal Size	D Body Diameter		A Head Diameter		H Head Height	G Protrusion Gage Diameter		P Protrusion		J Hex Socket Size	T Key En- gagement	F Fillet Transi- tion Diam.	Tensile Strength, Lbs.	Single Shear Strength of Body	Recommended Seating Torques, in./lbs.	
	Max	Min	Theoretical Sharp Max	Abs. Min	Ref	Max	Min	Max	Min	Nom	Min	Max	Min	lbs., Min	Coarse Thread	Fine Thread
4	0.1120	0.1075	0.255	0.218	0.083	0.172	0.171	0.057	0.036	1/16	0.055	0.136	880	950	8.	8.
5	0.1250	0.1202	0.281	0.240	0.090	0.196	0.195	0.059	0.037	5/64	0.061	0.153	1150	1,150	12.	13.
6	0.1380	0.1329	0.307	0.263	0.097	0.220	0.219	0.060	0.037	5/64	0.066	0.168	1320	1,400	15.	17.
8	0.1640	0.1585	0.359	0.311	0.112	0.267	0.266	0.063	0.039	3/32	0.076	0.194	2030	2,000	30.	31.
10	0.1900	0.1840	0.411	0.359	0.127	0.313	0.312	0.066	0.041	1/8	0.087	0.220	2540	2,700	40.	45.
1/4	0.2500	0.2435	0.531	0.480	0.161	0.424	0.423	0.072	0.043	5/32	0.111	0.280	4610	4,700	100.	110.
5/16	0.3125	0.3053	0.656	0.600	0.198	0.539	0.538	0.078	0.047	3/16	0.135	0.343	7600	7,360	200.	220.
3/8	0.3750	0.3678	0.781	0.720	0.234	0.653	0.652	0.088	0.050	7/32	0.159	0.405	11,200	10,600	350.	400.
7/16	0.4375	0.4294	0.844	0.781	0.234	0.690	0.689	0.104	0.063	1/4	0.159	0.468	15,400	14,400	560.	625.
1/2	0.5000	0.4919	0.938	0.872	0.251	0.739	0.738	0.131	0.087	5/16	0.172	0.530	20,600	18,850	850.	1,000.
5/8	0.6250	0.6163	1.188	1.112	0.324	0.962	0.961	0.146	0.096	3/8	0.220	0.655	30,500	29,450	1,700.	1,900.
3/4	0.7500	0.7406	1.438	1.355	0.396	1.186	1.185	0.170	0.105	1/2	0.220	0.780	45,100	42,400	3,000	3,200.
Tolerance on Length					Nominal Screw Size		Nominal Screw Length									
							Up to 1 in., Incl.			Over 1 in. to 2-1/2 in., Incl.			Over 2-1/2 in. to 6 in., Incl.			
					0 thru 3/8, Inclusive		-0.03			-0.04			-0.06			
					7/16 thru 3/4, Inclusive		-0.03			-0.06			-0.08			


Metallics

229 Cross Street
Bristol, CT 06010

www.metallics.us


Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358



Metallics

An **AMERICAN** Source For Premier
and Innovative Fasteners and Anchors

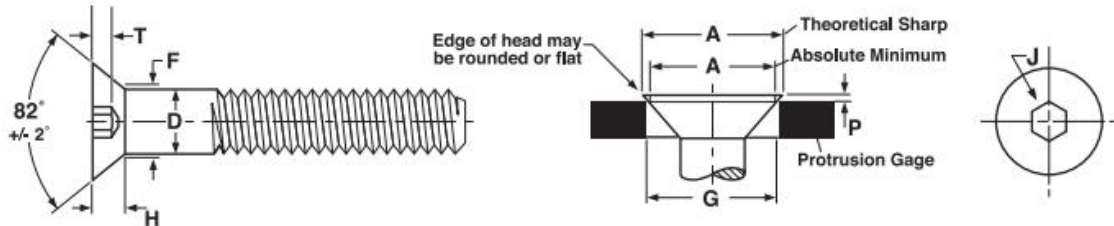

Description	Similar in design to a socket button head cap screw but with an 82° countersunk flat head.
Applications/ Advantages	Used when a flush mounting, high strength screw is required. Commonly used in tools and dies where moving parts pass over the fastened area.
Material	Screws shall be made from an alloy steel which conforms to the following chemical composition requirements (per product analysis)-- Carbon: 0.28 to 0.50%; Phosphorus: 0.040% maximum; Sulfur: 0.045% maximum. Also, one or more of the following elements shall be present in sufficient quantity to meet the performance requirements listed below: chromium, nickel, molybdenum or vanadium.
Heat Treatment	Screws shall be heat treated by oil quenching from above the transformation temperature and then tempered at a temperature not lower than 650°F.
Hardness	<i>Thru 1/2" diam.:</i> Rockwell C 39 - 44; <i>Over 1/2" diam.:</i> Rockwell C 37 - 44
Tensile Strength	<i>Thru 1/2" diam.:</i> 145,000 psi. minimum; <i>Over 1/2" diam.:</i> 135,000 psi. minimum
Yield Strength	153,000 psi. minimum (over 1/2" diam.)
Elongation	8% minimum (applies to machined specimens over 1/2" diam., of length at least 4D where D equals the nominal diameter of the screw)"
Reduction of Area	35% minimum (applies to machined specimens over 1/2" diam.)
Finish	Screws are supplied plain.


Metallics

229 Cross Street
Bristol, CT 06010

www.metallics.us


Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358



Metallics

An **AMERICAN** Source For Premier
and Innovative Fasteners and Anchors

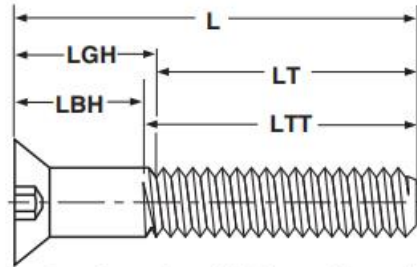

For screws of nominal lengths longer than those for which L_{GH} and L_{BH} values tabulated in this table and for screws over 1 inch in diameter, the maximum grip gaging length L_{GH} and the minimum body length L_{BH} of the screws shall be determined as follows:

$$L_{GH} = L - L_T$$

$$L_{BH} = L - L_{TT}$$

where L = nominal length, L_T = minimum thread length, and L_{TT} = maximum total thread length.

BODY AND GRIP LENGTHS OF FLAT HEAD SOCKET CAP SCREWS											ASME B18.3-2012	
Nominal Size	4		5		6		8		10		1/4	
L_T MIN.	.750		.750		.750		.875		.875		1.000	
L_{TT} MAX	0.99		1.00		1.05		1.19		1.27		1.50	
Nominal Length	L_{GH}	L_{BH}	L_{GH}	L_{BH}	L_{GH}	L_{BH}	L_{GH}	L_{BH}	L_{GH}	L_{BH}	L_{GH}	L_{BH}
1.25	0.50	0.38	0.50	0.38	0.50	0.34	0.38	0.22				
1.50	0.50	0.38	0.50	0.38	0.50	0.34	0.38	0.22	0.62	0.42		
1.75	1.00	0.88	1.00	0.88	1.00	0.84	0.88	0.72	0.62	0.42	0.75	0.50
2.00	1.00	0.88	1.00	0.88	1.00	0.84	0.88	0.72	1.12	0.92	0.75	0.50
2.50					1.50	1.34	1.38	1.22	1.62	1.42	1.25	1.00
3.00							1.88	1.72	2.12	1.92	1.75	1.50
3.50									2.62	2.42	2.25	2.00


Metallics

229 Cross Street
Bristol, CT 06010

www.metallics.us

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358



Metallics

An **AMERICAN** Source For Premier
and Innovative Fasteners and Anchors

Body and Grip Lengths Continued...

Nominal Size	5/16		3/8		7/16		1/2		5/8		3/4	
L_T MIN.	1.125		1.250		1.375		1.500		1.750		2.000	
L_T MAX	1.71		1.94		2.17		2.38		2.82		3.25	
Nominal Length	LGH	LBH	LGH	LBH	LGH	LBH	LGH	LBH	LGH	LBH	LGH	LBH
2.00	0.88	0.60										
2.25	0.88	0.60	1.00	0.69								
2.50	1.38	1.10	1.00	0.69	1.12	0.77	1.00	0.62				
3.00	1.88	1.60	1.50	1.19	1.62	1.27	1.00	0.62				
3.50	2.38	2.10	2.00	1.69	2.12	1.77	1.75	1.36	1.50	1.04	1.50	1.00
4.00	2.88	2.60	2.50	2.19	2.62	2.27	2.50	2.12	2.25	1.80	1.50	1.00
4.50	3.38	3.10	3.00	2.69	3.12	2.77	2.50	2.12	2.25	1.80	2.50	2.00
5.00	3.88	3.60	3.50	3.19	3.62	3.27	3.25	2.86	3.00	2.54	2.50	2.00
5.50	4.38	4.10	4.00	3.69	4.12	3.77	4.00	3.62	3.75	3.30	3.50	3.00
6.00	4.88	4.60	4.50	4.19	4.62	4.27	4.00	3.62	3.75	3.30	3.50	3.00


Metallics

229 Cross Street
Bristol, CT 06010

www.metallics.us

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358



Metallics

An **AMERICAN** Source For Premier
and Innovative Fasteners and Anchors

THREAD DIMENSIONS

EXTERNAL THREADS - CLASS 3A							ANSI B1.1
Screw Size	Major Diameter			Pitch Diameter			Minor Diameter
	Basic	Max	Min	Basic	Max	Min	Max
0-80	.0600	.0600	.0568	.0519	.0519	.0506	.0447
1-72	.0730	.0730	.0695	.0640	.0640	.0626	.0560
2-56	.0860	.0860	.0819	.0744	.0744	.0728	.0641
3-48	.0990	.0990	.0945	.0855	.0855	.0838	.0734
4-40	.1120	.1120	.1069	.0958	.0958	.0939	.0822
4-48	.1120	.1120	.1075	.0985	.0985	.0967	.0864
5-40	.1250	.1250	.1199	.1088	.1088	.1069	.0943
6-32	.1380	.1380	.1320	.1177	.1177	.1156	.0997
6-40	.1380	.1380	.1329	.1218	.1218	.1198	.1073
8-32	.1640	.1640	.1580	.1437	.1437	.1415	.1257
8-36	.1640	.1640	.1585	.1460	.1460	.1439	.1299
10-24	.1900	.1900	.1828	.1629	.1629	.1604	.1389
10-32	.1900	.1900	.1840	.1697	.1697	.1674	.1517
1/4-20	.2500	.2500	.2419	.2175	.2175	.2147	.1887
1/4-28	.2500	.2500	.2435	.2268	.2268	.2243	.2062
5/16-18	.3125	.3125	.3038	.2764	.2764	.2734	.2443
5/16-24	.3125	.3125	.3053	.2854	.2854	.2827	.2614
3/8-16	.3750	.3750	.3656	.3344	.3344	.3311	.2983
3/8-24	.3750	.3750	.3678	.3479	.3479	.3450	.3239
7/16-14	.4375	.4375	.4272	.3911	.3911	.3876	.3499
7/16-20	.4375	.4375	.4294	.4050	.4050	.4019	.3762
1/2-13	.5000	.5000	.4891	.4500	.4500	.4463	.4056
1/2-20	.5000	.5000	.4919	.4675	.4675	.4643	.4387
5/8-11	.6250	.6250	.6129	.5660	.5660	.5619	.5135
5/8-18	.6250	.6250	.6163	.5889	.5889	.5854	.5568
3/4-10	.7500	.7500	.7371	.6850	.6850	.6806	.6273
7/8-9	.8750	.8750	.8611	.8028	.8028	.7981	.7387
1-8	1.0000	1.0000	.9850	.9188	.9188	.9137	.8466
*Class 3A threads over 1" diameter screws are Class 2A threads.							
* 1 1/4-7	1.2500	1.2478	1.2314	1.1572	1.1550	1.1476	1.0725
* 1 1/2-6	1.5000	1.4976	1.4794	1.3917	1.3893	1.3812	1.2931

Metallics

229 Cross Street
Bristol, CT 06010

www.metallics.us

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358