Metallics

An AMERICAN Source For Premier
and Innovative Fasteners and Anchors

BUGLE HEAD 6 LOBE DRIVE TYPE 17 DECK SCREW – 18-8 STAINLESS

The following Specification Sheet applies to all **Bugle Head 6 Lobe Drive Type 17 Deck Screw – 18-8 Stainless** in our **SDL series**.

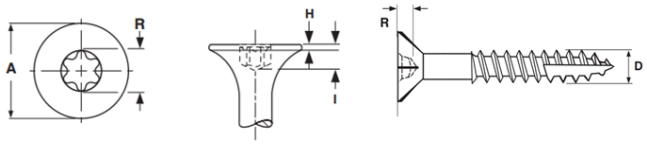

BUGLE HEADS FOR DRYWALL & DECK SCREWS							
Nominal Size	A		H		R	I	Drive Size
	Head Diameter		Head Thickness		Recess Diameter	Recess Penetration Depth	
	Max	Min	Max	Min	Ref	Min	
8	.363	.315	.039	.020	.155	.057	T 20
10	.363	.334	.039	.020	.204	.067	T 25
1/4	.472	.450	.058	.047	.277	.067	

In the absence of a single industry standard for Bugle Heads, these dimensions are offered as a guide; slight deviations are acceptable.

THREAD DIMENSIONS

RECESS COARSE THREAD DECK SCREWS			
Screw Size	Threads per inch	D	
		Major Diameter	
		Max.	Min.
8	8 to 10	.187	.170
10	8	.211	.192
1/4	8	.270	.240
Tolerance on Length	Up to 1 in. incl.: -0, +0.060	Over 1 in.: -0, +0.100	

NOTE: There is no single standard for deck screw dimensions. These values are offered as a guide; defiations from these specifications may occur.

Metallics
229 Cross Street
Bristol, CT 06010
www.metallics.us
Phone: 860 589-4186 Toll Free: 800 243-8272
Fax: 860 584-1008 Toll Free Fax: 800 831-9358

Metallics

An AMERICAN Source For Premier
and Innovative Fasteners and Anchors

	Stainless
Description	A bugle head screw with spaced threads and extra sharp point, manufactured of corrosion-resistant stainless steel.
Applications/ Advantages	Designed specifically for joining pieces of pressure treated lumber. Remains resistant to corrosion for approximately twice as long as do dacrotized steel deck screws.
Material	18-8 passivated stainless steel
Hardness	Rockwell B 85 - 95
Plating	Stainless deck screws require no additional coating.

Metallics
229 Cross Street
Bristol, CT 06010
www.metallics.us
Phone: 860 589-4186 Toll Free: 800 243-8272
Fax: 860 584-1008 Toll Free Fax: 800 831-9358