


Metallics

An **AMERICAN** Source For Premier
and Innovative Fasteners and Anchors

PAN HEAD MACHINE SCREWS - BRASS

The following Specification Sheet applies to all **Brass Pan Head Machine Screws** including those in our **SPMB and PMP series** of screws.

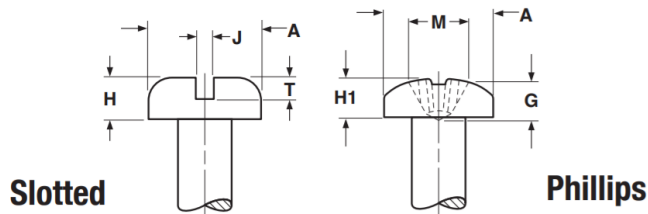

PAN HEADS FOR MACHINE SCREWS AND SEMS													ASME B18.6.3-2010	
Nominal Size	A		H		H1		J		T		M	G		Phillips Driver Size
	Head Diameter		Height of Head				Width of Slot		Depth of Slot		Dimensions of Recess			
			Slotted		Recessed						Diameter	Recess Penetration Gaging Depth		
	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Ref	Max	Min	
4	.219	.205	.068	.058	.080	.070	.039	.031	.040	.030	.115	.071	.053	1
10	.373	.357	.110	.099	.133	.122	.060	.050	.068	.053	.192	.113	.089	2
1/4	.492	.473	.144	.130	.175	.162	.075	.064	.087	.070	.274	.144	.118	3

Specification Requirements:

- Dimensions: ASME B18.6.3 **Exception: screws 6 inches and shorter are fully threaded.
- Drive Style: Slotted
- Material: Brass (Naval, Yellow or Alloy number 360)
- Thread Requirements: ASME B1.1, UNC & UNF, Class 2A.

Metallics

229 Cross Street
Bristol, CT 06010

www.metallics.us

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358