



NOTES:

- 1) FINISH: GRAY
- 2) CABINET: 16 GA GALV. STEEL
- 3) 200 AMP CONTINUOUS  
600 VAC, 1 PHASE, 3 WIRE
- 4) UNIT HAS PROVISIONS FOR BROOKS  
OR INNER-TITE STANDARD LENGTH  
BARREL LOCK IN CONJUNCTION WITH  
BROOKS LOCK GUARDS #865 OR #86505,  
WITH A PERMANENTLY WELDED BRACKET.
- 5) UNIT IS SUPPLIED WITH OXIDE  
INHIBITOR ON CONNECTORS.
- 6) TEMPORARY CARDBOARD METER  
COVER PROVIDED.
- 7) EATON LABEL ATTACHED TO THE  
END OF THE CARTON.
- 8) PALLETIZE 84 UNITS PER PALLET. PALLET &  
CARTONS ARE NOT TO EXCEED 42" HIGH.
- 9) EATON LOGO STAMPED IN THE  
LOWER LEFT-HAND CORNER OF FRONT.

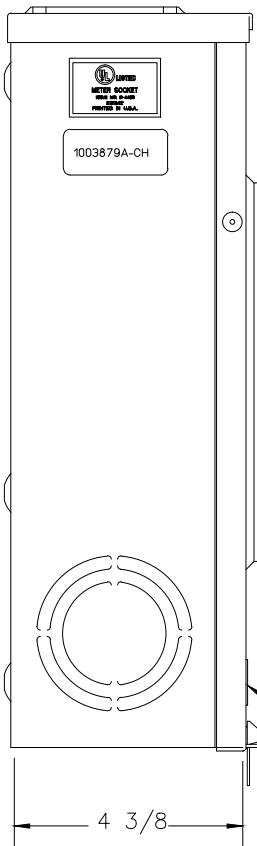

7/8 DIA KO FOR  
BARREL LOCK

#8-250MCM CU7AL  
LINE, LOAD, & NEUTRAL


GROUND 5TH  
TERMINAL

3-5/16 HUB OPENING

MOUNTING EMBOSS W/ 5/16  
DIA KO (6) PLACES

#14-2 CU7AL  
GROUND CONN



HORN BYPASS

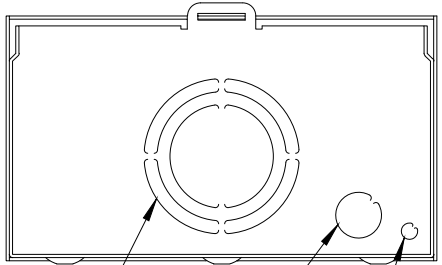

2-1/2, 2, 1-1/2 KO  
(4) PLACES

1/2 KO

5/16 DIA KO

TITLE / DESCRIPTION		SKT 200A 1P HO		DRAFTER/DESIGNER RLK		DATE (YYYY/MM/DD) 2013/12/17		
THE INFORMATION ON THIS DRAWING IS DISCLOSED IN CONFIDENCE AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED, EXCEPT FOR THE PURPOSE WHICH FURNISHED.		 Powering Business Worldwide © 1998 Eaton Corporation, All Rights Reserved		SIZE B	DRAWING NUMBER	1003879A-CH		REVISION 007
				UNLESS OTHERWISE SPECIFIED DIMENSIONS IN INCHES			SCALE N/A	SHEET 1 OF 1