
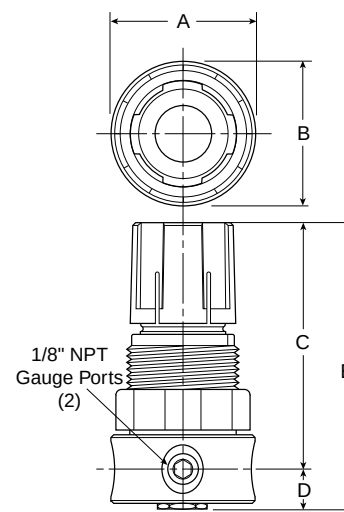


**R364, R374 Regulators – Miniature****Features**

- High flow and high sensitivity
- Constant bleed option for semi-precision applications
- Can be used for water service (non-relieving)
- Unbalanced poppet standard
- Diaphragm operated for fast response
- Non-rising adjusting knob
- Stainless steel version available (see stainless steel section of catalog)
- High flow: 10 SCFM<sup>§</sup> (Air)  
1.25 GPM (Water)



| Port Size       | NPT             |
|-----------------|-----------------|
| <b>Brass</b>    |                 |
| 1/8"            | <b>R364-01C</b> |
| 1/4"            | <b>R364-02C</b> |
| <b>Aluminum</b> |                 |
| 1/8"            | <b>R374-01C</b> |
| 1/4"            | <b>R374-02C</b> |

Standard part numbers shown bold.

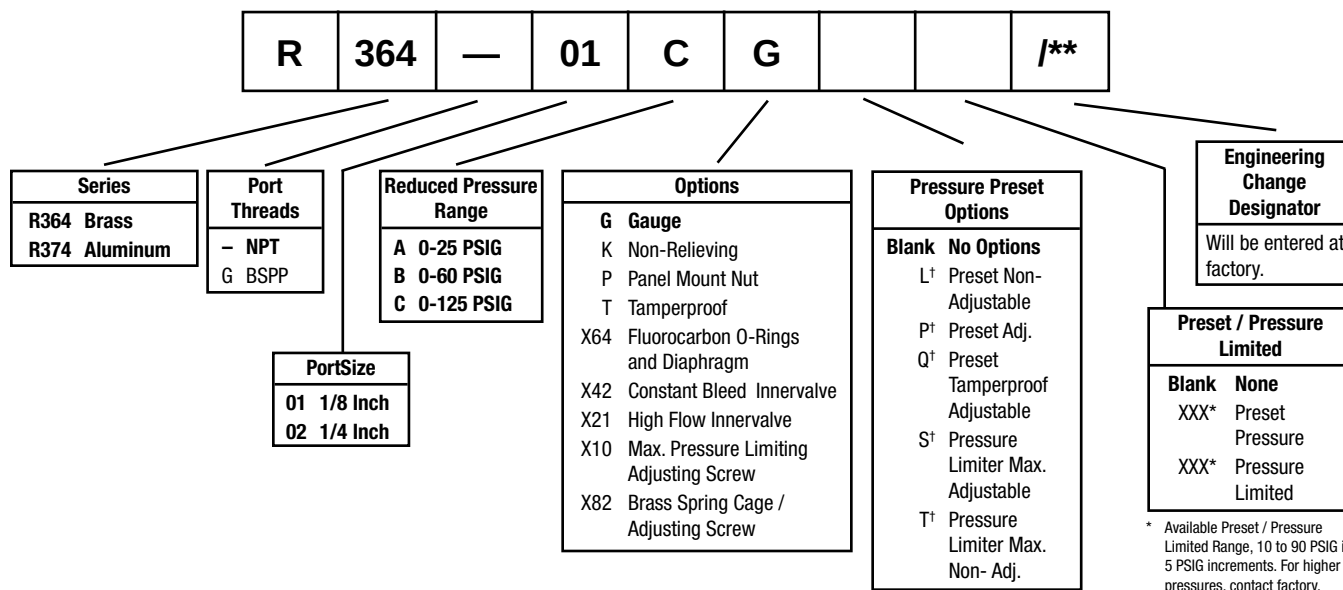
For other models refer to ordering information below.

NOTE: 1.250 Dia. (31.8mm) hole required for panel mounting.

§ SCFM = Standard cubic feet per minute at 100 PSIG inlet, 75 PSIG no flow secondary setting and 25% pressure drop.

| <b>R364, R374<br/>Regulator<br/>Dimensions</b> |                |                |
|------------------------------------------------|----------------|----------------|
| A                                              | B              | C              |
| 1.56<br>(39.7)                                 | 1.56<br>(39.7) | 2.56<br>(65.1) |
| D                                              | E              |                |
| 0.50<br>(12.7)                                 | 3.06<br>(77.8) |                |

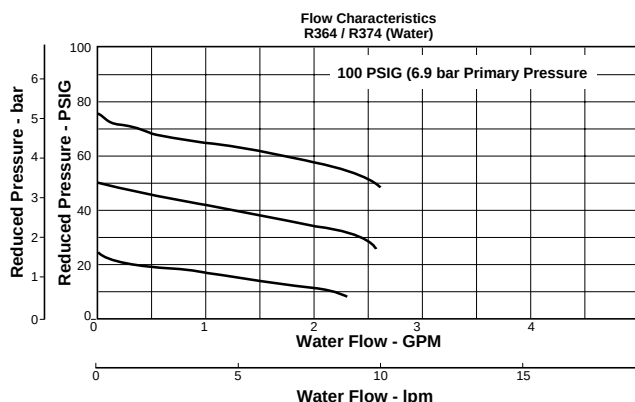
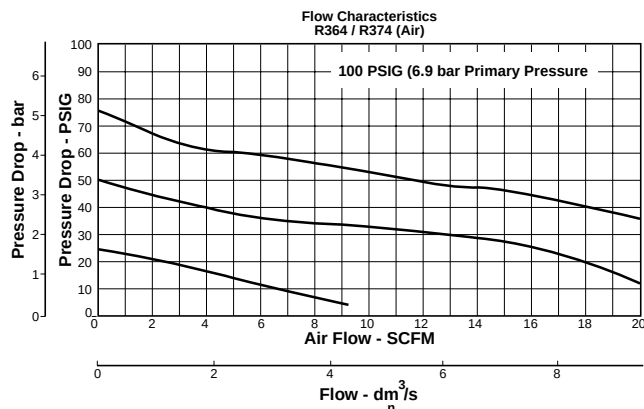
Inches (mm)

**Ordering Information**

† Inlet Pressure is 100 PSIG. For other pressures, contact factory.

**BOLD ITEMS ARE MOST POPULAR.**

## Technical Information

**⚠ WARNING**

Product rupture can cause serious injury.  
Do not connect regulator to bottled gas.  
Do not exceed maximum primary pressure rating.

**⚠ CAUTION:**

**REGULATOR PRESSURE ADJUSTMENT** – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

## R364, R374 Regulator Kits &amp; Accessories

**Gauges** – 1-1/2" Dial Size, 1/8" Back Connection  
0 to 60 PSIG (0 to 400 kPa) ..... K4515N18060

1-1/2" Dial Size, 1/8" Back Connection  
0 to 160 PSIG, (0 to 1100 kPa) ..... K4515N18160

**Mounting Bracket Kit** ..... SA161X57  
(Includes Panel Mount Nut)

**Panel Mount Nut** – Plastic ..... R05X51-P  
Aluminum ..... R05X51-A

**Spring Cage & Knob** ..... CKR364Y

**Spring Cage Kit (Tamperproof)** ..... CKR364T

**Repair Kits –**

Standard Nitrile –

Non-Relieving Diaphragm, Valve Assembly ..... RKR163Y

Relieving Diaphragm, Valve Assembly ..... RKR164Y

Fluorocarbon –

Non-Relieving Diaphragm, Valve Assembly ..... RKR164KX64

Relieving Diaphragm, Valve Assembly ..... RKR164X64

## Specifications

**Gauge Ports (2)** ..... 1/8 Inch

**Port Threads** ..... 1/8, 1/4 Inch

**Primary Pressure Rating** ..... 2 to 125 PSIG (-15 to 8.5 bar)

**Supply Pressure** ..... 300 PSIG Maximum (20.4 bar)

**Temperature Rating** ..... 40°F to 125°F (4.4°C to 52°C)

**Weight** – Brass Body ..... 0.5 lb. (0.23 kg) / Unit  
25 lb. (11.34 kg) / 48-Unit Master Pack

Aluminum Body ..... 0.25 lb. (0.11 kg) / Unit  
15 lb. (6.80 kg) / 48-Unit Master Pack

## Materials of Construction

**Adjusting Screw** ..... Steel

**Body** – R364 ..... Brass  
R374 ..... Aluminum

**Springs** – Adjusting ..... Steel  
Bottom ..... Stainless Steel

**Spring Cage** ..... Acetal

**Bottom Plug, Innervale, Diaphragm Bottom** ..... Brass