


## 3-Way Diverting Ball Valves T Flow Pattern



Note: ¼ turn handle can be adjusted to any orientation.  
Notches on the valve stem reflect the three openings on the ball.

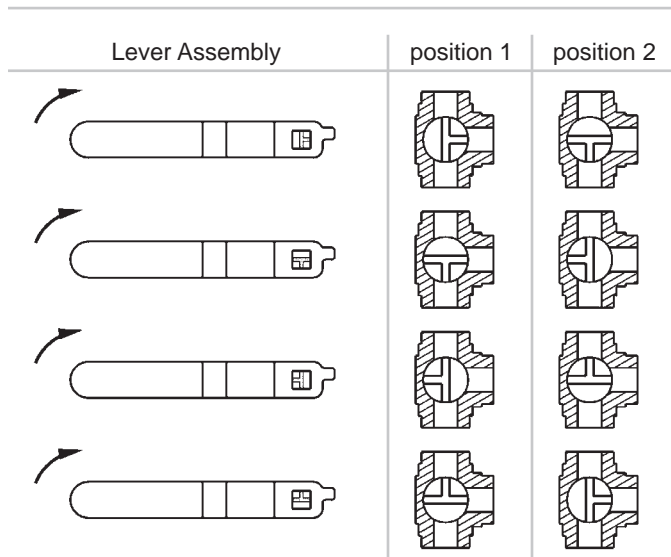

### Features:

- pressure rating: **400 PSI** WOG; **100 PSI** saturated steam
- brass body
- blow-out proof stem
- chrome plated brass ball
- PTFE seats, seals, and thrust washer
- adjustable stem packing
- maximum temperature: **366°F**

**female NPT x female NPT x female NPT**

Size	Port	Brass	
		Part #	Price/E
½"	standard	<b>BBV50DTW</b>	<b>\$108.50</b>
¾"	standard	<b>BBV75DTW</b>	<b>119.80</b>
1"	standard	<b>BBV100DTW</b>	<b>183.65</b>
1¼"	standard	<b>BBV125DTW</b>	<b>269.10</b>
1½"	standard	<b>BBV150DTW</b>	<b>409.35</b>
2"	standard	<b>BBV200DTW</b>	<b>668.55</b>

## L Flow Pattern

### Features:

- can be used with gasoline and diesel fuel
- pressure rating: **400 PSI** WOG
- bronze body
- blow-out proof stem
- chromium-plated ball
- RPTFE seats and stuffing box ring
- stainless steel handle and nut with vinyl sleeve
- adjustable packing gland

**female NPT x female NPT x female NPT**

Size	Port	Bronze	
		Part #	Price/E
½"	full	<b>BBV50TW<sup>1</sup></b>	<b>\$72.90</b>
¾"	standard	<b>BBV75TW</b>	<b>100.75</b>
1"	standard	<b>BBV100TW</b>	<b>133.50</b>

<sup>1</sup> carbon steel handle and nut with vinyl sleeve

### Features:

- rated to **800 PSI** WOG
- stainless steel body and ball
- blow-out proof stem
- RPTFE seats and stuffing box ring
- stainless steel handle and nut with vinyl sleeve
- adjustable packing gland
- meets NACE MR-01-75

**female NPT x female NPT x female NPT**

Size	Port	Stainless Steel	
		Part #	Price/E
½"	full	<b>SSBV50TW</b>	<b>\$302.00</b>
¾"	standard	<b>SSBV75TW</b>	<b>400.00</b>
1"	standard	<b>SSBV100TW</b>	<b>503.00</b>

