Flange Adapters - Series FA


Application:

used to connect an ANSI Class 125 and 150 flange to a grooved pipe using a grooved clamp

- Provides a rigid one piece connection that can be disconnected by removing the clamp assembly. To assemble to another flange, position bolt heads on the adapter (grooved) side.
- ductile iron body with rust inhibiting paint

Nominal Size	Pipe OD	Max PSI	Flange Dimensions		Approx. Weight	Bolts		Ductile Iron	
Size		at 70°F	Α	В	(lbs.)	qty	size	Part #	Price/E
2"	2.375	300	6"	2-3/8"	2.8	4	5/8"	FA20	\$37.40
3"	3.500	300	71/4"	2-3/8"	5.3	4	5/8"	FA30	61.15
4"	4.500	300	81/2"	2-3/8"	6.4	8	5/8"	FA40	77.40
6"	6.625	300	11"	2-9/16"	11.5	8	3/4"	FA60	142.30
8"	8.625	300	13¼"	3"	23.0	8	3/4"	FA80	208.50





ANSI Split Flanges - Series SF




Features:

- provides a direct connection between a grooved adapter and an ANSI Class 125 and 150 raised face flanged component
- can be used with flat face flanges by removing the raised projections on the outside face of the flange.
- ductile iron body with rust inhibiting paint
- Underwriters Listed and Factory Mutual approved
- Buna gaskets are available upon request

•	Comparable to:
	Victaulic's #741
	Grinnell's #7012



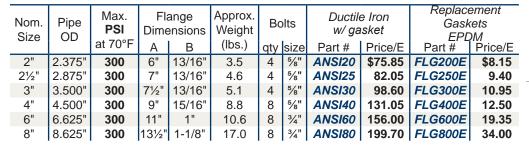







Reducing Adapters - Series RA





Features:

- ductile iron body with rust inhibiting paint
- Underwriters Listed and Factory Mutual approved
- Comparable to:

Victaulic's #50, Grinnell's #7072

Nominal	Nominal	Dimension	Approx.	Ductile Iron	
Size	Size	E to E	Weight (Lbs.)	Part #	Price/E
2"	1½"	2.5	0.9	RAGG20150	\$26.25
2½"	2"	2.5	1.1	RAGG25020	27.45
3"	2"	2.5	1.2	RAGG3020	26.25
3"	2½"	2.5	1.5	RAGG30250	32.45
4"	2"	3.0	2.2	RAGG4020	38.60
4"	2½"	3.0	2.4	RAGG40250	40.55
4"	3"	3.0	2.4	RAGG4030	43.25
5"	4"	3.5	4.4	RAGG5040	69.90
6"	2"	4.0	4.0	RAGG6020	78.65
6"	2½"	4.0	4.4	RAGG60250	90.30
6"	3"	4.0	4.6	RAGG6030	82.40
6"	4"	4.0	7.0	RAGG6040	82.40



