

Wilkerson Combination Unit with Protective Frame

Application:

Provides downstream air preparation with protection and convenience.

Features:

Include components:

- C31-08AMB 1" FRL with metal bowls and auto drain filter
- BBLV100 1" brass ball valve and AM12 air king on inlet port
- BBV100DTW 3-way ball valve installed between regulator and lubricator provides option for non-lubricated air
- heavy duty frame protects air prep components
- operating:
maximum pressure: **250 PSIG**
temperature range: **40°F to 150°F (4°C to 66°C)**
flow: 320 SCFM



Pneumatic Fittings


Size	Part #	Price/E
1"	C31-08FRAME	\$2045.00

Wilkerson Exhaust Muffler

Features:

- The contaminants in the exhaust flow are mechanically separated and twice filtered to 5 micron levels. The clean, muffled exhaust flows out of the unit under the metal hood on top.
- removes oily aerosols from exhaust flows
- one inlet port
- 5 micron element
- quick disconnect clamp ring for easy bowl removal
- manual drain
- operating:
maximum pressure: **150 PSIG (10.3 bar)**
temperature range: **32°F to 125°F (0°C to 52°C)**

Size	Flow @ 90 PSI	Transparent Bowl with Guard	
		Part #	Price/E
½"	240 SCFM	F23-04M	\$208.70

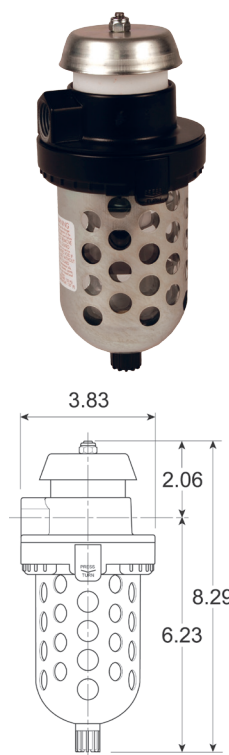

FRL's are designed for air service only, unless otherwise indicated.