


The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Timken Part Number 496 - 492A, Tapered Roller Bearings - TS (Tapered Single) Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

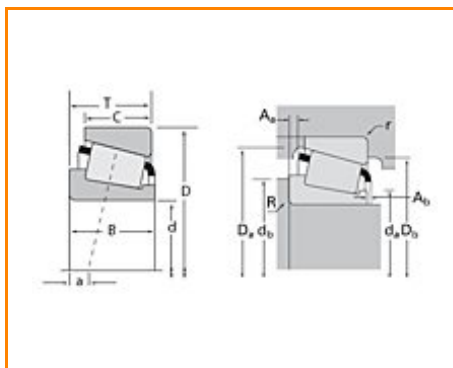

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Series	495
Cone Part Number	496
Cup Part Number	492A
Design Units	Imperial
Bearing Weight	1.500 Kg 3.40 lb
Cage Type	Stamped Steel

Dimensions

d - Bore	80.963 mm 3.1875 in
-----------------	------------------------

D - Cup Outer Diameter	133.350 mm 5.2500 in
B - Cone Width	29.769 mm 1.1720 in
C - Cup Width	22.225 mm 0.8750 in
T - Bearing Width	30.163 mm 1.1875 in

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius¹	3.560 mm 0.14 in
r - Cup Backface "To Clear" Radius²	3.30 mm 0.130 in
da - Cone Frontface Backing Diameter	88.90 mm 4.29 in
db - Cone Backface Backing Diameter	95.00 mm 3.74 in
Da - Cup Frontface Backing Diameter	129.00 mm 5.08 in
Db - Cup Backface Backing Diameter	119.89 mm 4.72 in
Ab - Cage-Cone Frontface Clearance	3 mm 0.12 in
Aa - Cage-Cone Backface Clearance	1.8 mm 0.07 in
a - Effective Center Location³	-0.8 mm -0.03 in

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁴	40000 N 9000 lbf
---	---------------------

C1 - Dynamic Radial Rating (1 million revolutions)⁵	154000 N 34700 lbf
---	-----------------------

C0 - Static Radial Rating	216000 N 48600 lbf
----------------------------------	-----------------------

C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁶	30500 N 6850 lbf
---	---------------------

Factors

K - Factor⁷	1.31
-------------------------------	------

e - ISO Factor⁸	0.44
-----------------------------------	------

Y - ISO Factor⁹	1.35
-----------------------------------	------

G1 - Heat Generation Factor (Roller-Raceway)	105
---	-----

G2 - Heat Generation Factor (Rib-Roller End)	29.3
---	------

Cg - Geometry Factor	0.125
-----------------------------	-------

¹ These maximum fillet radii will be cleared by the bearing corners.

² These maximum fillet radii will be cleared by the bearing corners.

³ Negative value indicates effective center inside cone backface.

⁴ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.


⁵ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

⁶ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁷ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

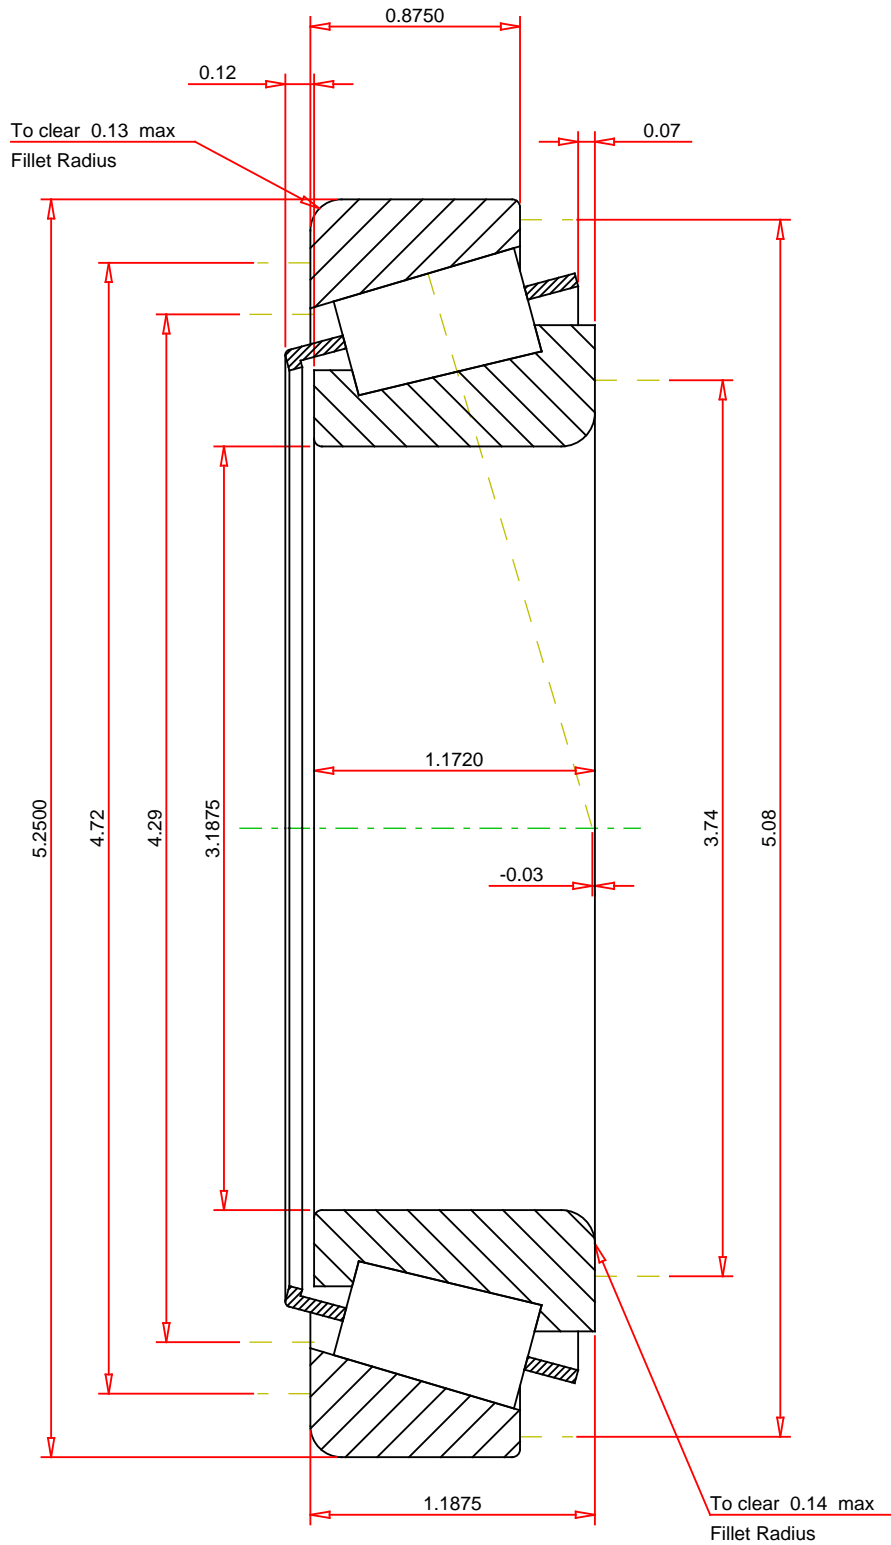

IMPERIAL UNITS

ISO Factor - e 0.44
 ISO Factor - Y 1.35
 Bearing Weight 3.4 lb
 Number of Rollers Per Row 23
 Effective Center Location -0.03 inch

TIMKEN®

THE TIMKEN COMPANY
 NORTH CANTON, OHIO USA

496 - 492A
TS BEARING ASSEMBLY

K Factor 1.31
 Dynamic Radial Rating - C90 40000 lbf
 Dynamic Thrust Rating - Ca90 30500 lbf
 Static Radial Rating - C0 216000 lbf
 Dynamic Radial Rating - C1 154000 lbf

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY