The Timken Company
4500 Mt Pleasant St. NW
N. Canton, OH 44720
Phone: (234) 262-3000
E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Timken Part Number L319249 - L319210, Tapered Roller Bearings - TS (Tapered Single) Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

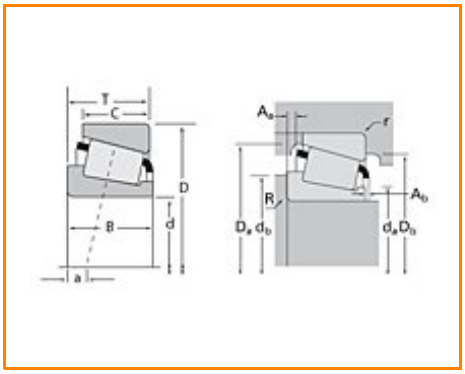

Specifications | Dimensions | Abutment and Fillet Dimensions | Basic Load Ratings | Factors

Specifications

Series	L319200
Cone Part Number	L319249
Cup Part Number	L319210
Design Units	Imperial
Bearing Weight	0.800 Kg 1.70 lb
Cage Type	Stamped Steel

Dimensions

d - Bore	95.250 mm 3.7500 in
D - Cup Outer Diameter	130.175 mm 5.1250 in
B - Cone Width	21.433 mm 0.8438 in
C - Cup Width	16.670 mm 0.6563 in
T - Bearing Width	20.638 mm 0.8125 in

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius[1]	1.520 mm 0.06 in
r - Cup Backface "To Clear" Radius[2]	1.52 mm 0.06 in
da - Cone Frontface Backing Diameter	101.09 mm 4.64 in
db - Cone Backface Backing Diameter	103.12 mm 4.06 in
Da - Cup Frontface Backing Diameter	125.00 mm 4.96 in
Db - Cup Backface Backing Diameter	121.92 mm 4.80 in
Ab - Cage-Cone Frontface Clearance	2 mm 0.08 in
Aa - Cage-Cone Backface Clearance	0.3 mm 0.01 in
a - Effective Center Location[3]	1.3 mm 0.05 in

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)[4]	24700 N 5560 lbf
C1 - Dynamic Radial Rating (1 million revolutions)[5]	95400 N 21400 lbf
C0 - Static Radial Rating	166000 N 37400 lbf
C_{a90} - Dynamic Thrust Rating (90 million revolutions)[6]	14800 N 3320 lbf

Factors

K - Factor[7]	1.67
e - ISO Factor[8]	0.35
Y - ISO Factor[9]	1.72
G1 - Heat Generation Factor (Roller-Raceway)	125
G2 - Heat Generation Factor (Rib-Roller End)	90.7
Cg - Geometry Factor	0.122

[1] These maximum fillet radii will be cleared by the bearing corners.

[2] These maximum fillet radii will be cleared by the bearing corners.

[3] Negative value indicates effective center inside cone backface.

[4] Based on 90 x 10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

[5] Based on 1 x 10^6 revolutions L_{10} life, for the ISO life calculation method.

[6] Based on 90 x 10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

[7] These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

[8] These factors apply for both inch and metric calculations. Consult your Timken representative for instruction

on use.

[9] These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

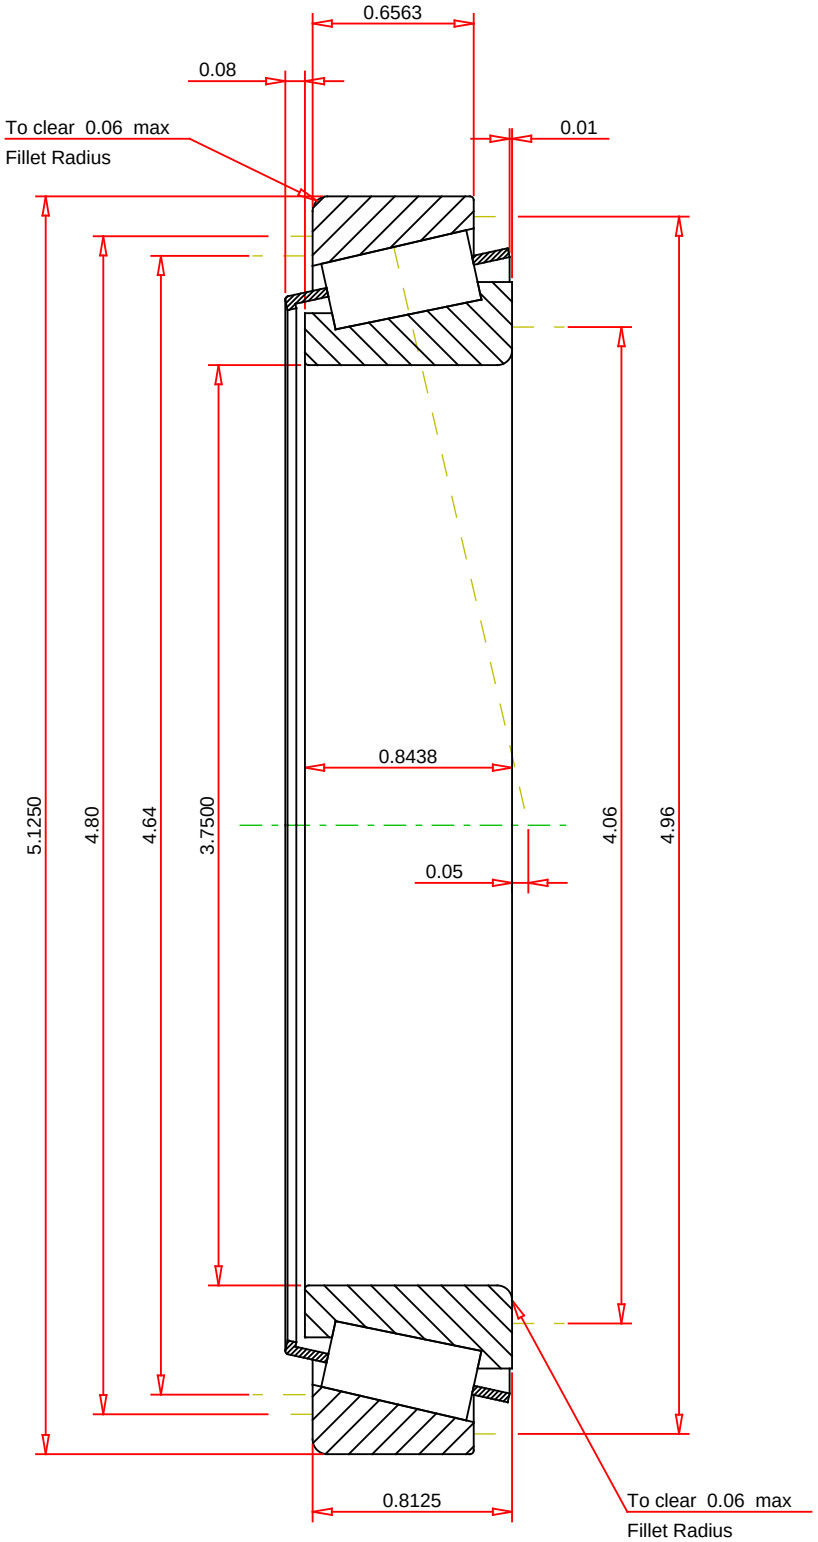

IMPERIAL UNITS

ISO Factor - e	0.35	
ISO Factor - Y	1.72	
Bearing Weight	1.7	lb
Number of Rollers Per Row	36	
Effective Center Location	0.05	inch

TIMKEN

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

L319249 - L319210
TS BEARING ASSEMBLY

K Factor	1.67	
Dynamic Radial Rating - C90	24700	lbf
Dynamic Thrust Rating - Ca90	14800	lbf
Static Radial Rating - C0	166000	lbf
Dynamic Radial Rating - C1	95400	lbf

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY