The Timken Company
4500 Mt Pleasant St. NW
N. Canton, OH 44720
Phone: (234) 262-3000
E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Timken Part Number YASM 2 1/2, Pillow Block Units Setscrew Locking (Includes Industrial and Standard Series)



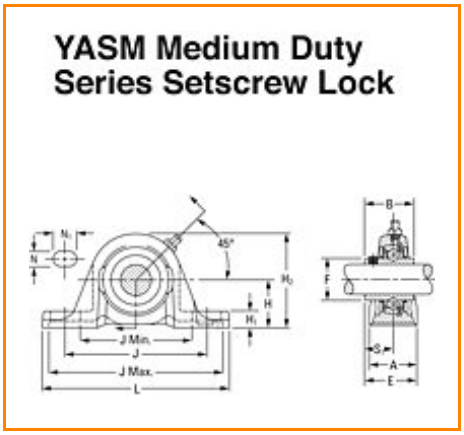

Specifications | Dimensions | Basic Load Ratings

Specifications

Bore Size d	2 1/2 in 63.5 mm
Bearing Number	GYM1208KRRB
Inside Ring Outside Diameter	3.422 in 86.9 mm
Dimension B1	3.062 in 77.78 mm
Dimension T	1.437 in 36.5 mm
Dimension D1	3.422 in 86.92 mm
Series	Industrial

Weight	16.106 lb 7.31 Kg
Seal Type	Shroud Seal

Dimensions

Shaft Height H	76.2 mm 3.000 in
Total Length L	266.7 mm 10.500 in
Total Width A	2.875 in 73.02 mm
Bolt Hole Spacing J	203.2 mm 8.000 in
Bolt Hole Width N	20.57 mm 0.810 in
Bolt Hole Length N1	35.05 mm 1.380 in
Base Height H1	33.34 mm 1.313 in
Total Height H2	153.99 mm 6.063 in
Dimension L1	88.9 mm 3.500 in
Inside Ring Width B	N/A
Center of Bearing from End S	34.92 mm 1.375 in

Basic Load Ratings

Static Load Rating	9700 lbf 43000 N

Dynamic Load Rating	15600 lbf 69500 N

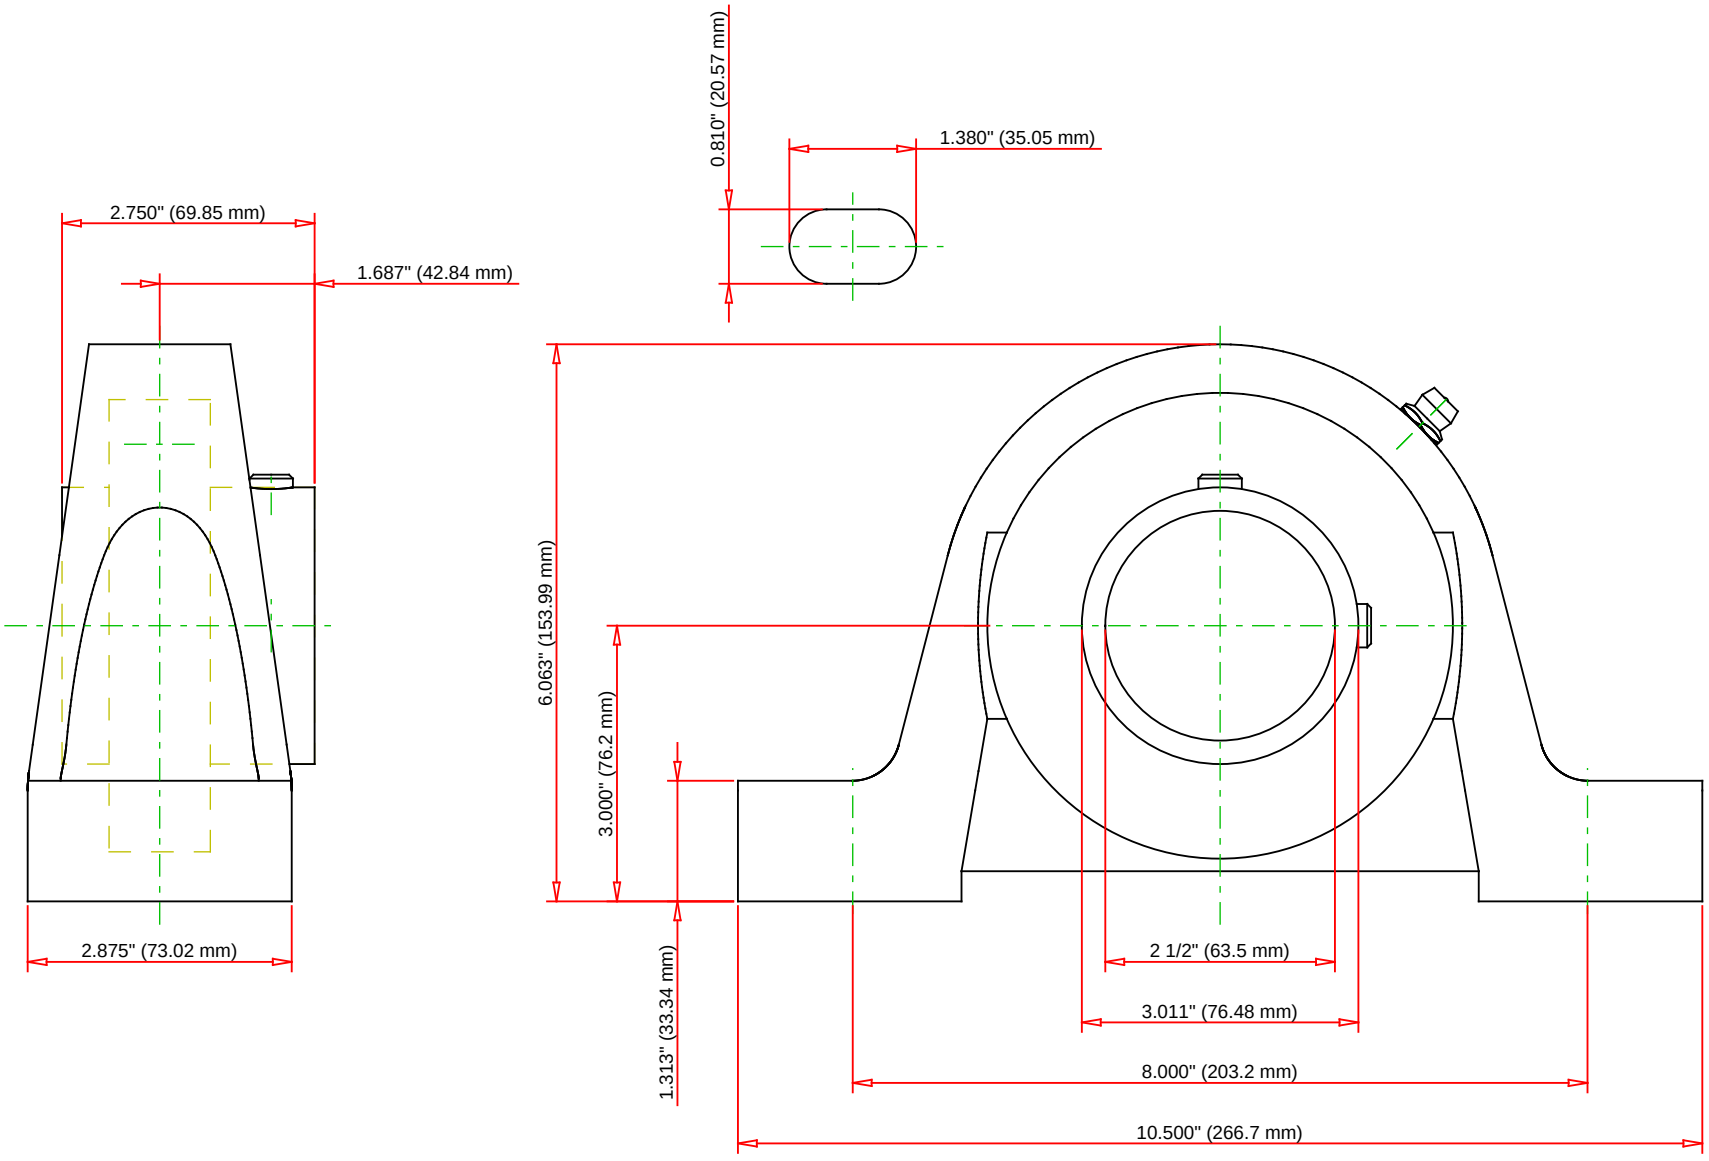

Bearing Number	GYM1208KRRB				
Load Ratings - C_r	15600	lbf	69500	N	
Load Ratings - C_{0r}	9650	lbf	43000	N	
Weight	0	lb	0	kg	
Bolt Size	M12x1.75				

TIMKEN

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

YASM 2 1/2

Pillow Block Units Setscrew Locking (Includes Industrial and Standard Series)

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY