


The Timken Company


4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Timken Part Number YCJT 40 SGT, Two-Bolt Flanged Units Setscrew Locking (Includes Industrial and Standard Series)

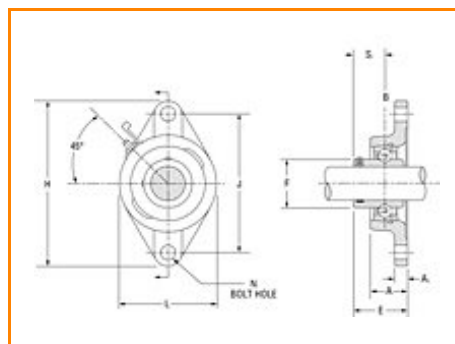

[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#)

Specifications

Bore Size d	1.575 in 40 mm
Bearing Number	GYE40KRRB SGT
Dimension E	2.142 in 54.4 mm
Inside Ring Outside Diameter	2.055 in 52.2 mm
Series	Industrial
Weight	4.83 lb 2.19 Kg
Seal Type	Shroud Seal



Dimensions

Total Length H	171.5 mm 6.752 in
Total Height L	104.8 mm 4.126 in
Total Width A	1.500 in 38.1 mm
Bolt Hole Spacing J	143.7 mm 5.657 in
Bolt Hole Size N	13 mm 0.512 in
Flange Thickness A1	14.3 mm 0.563 in
Center of Bearing from Housing End A2	24.2 mm 0.953 in
Inside Ring Width B	49.2 mm 1.937 in
Center of Bearing from Bearing End S	24.2 mm 0.953 in

Basic Load Ratings

—

Static Load Rating	4400 lbf 19600 N
Dynamic Load Rating	8150 lbf 36000 N

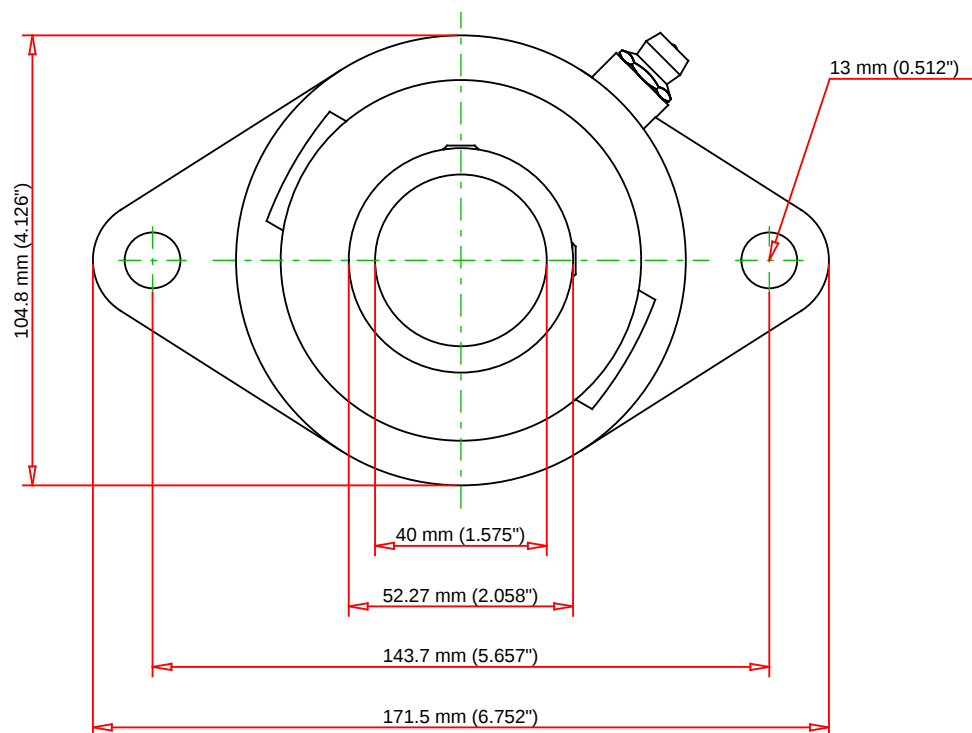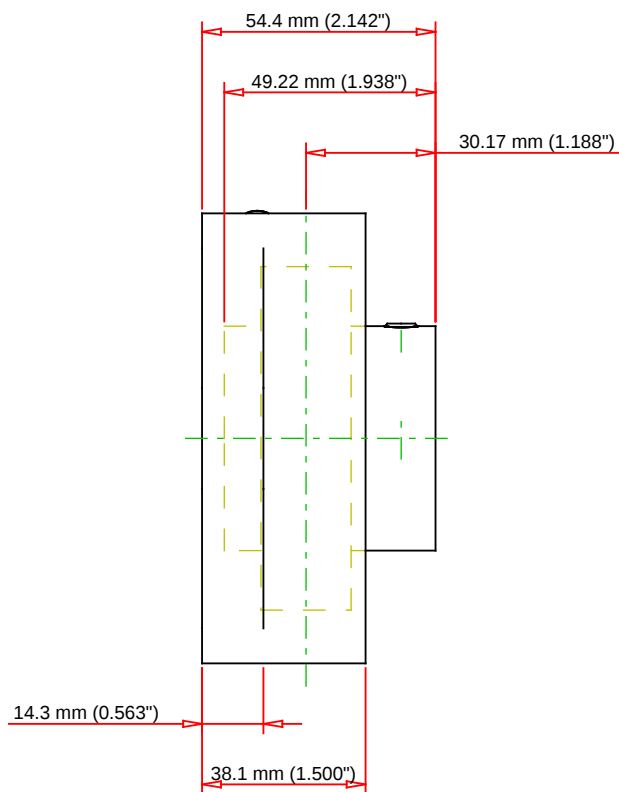

Bearing Number	GYE40KRRB SGT			
Load Ratings - C _r	8150	lbf	36000	N
Load Ratings - C _{0r}	4400	lbf	19600	N
Weight		lb		kg
Bolt Size	M8x1.25			

TIMKEN

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

YCJT 40 SGT

Two-Bolt Flanged Units Setscrew Locking
(Includes Industrial and Standard Series)

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY