The Timken Company
4500 Mt Pleasant St. NW
N. Canton, OH 44720
Phone: (234) 262-3000
E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Timken Part Number YASM 2 3/16, Pillow Block Units Setscrew Locking (Includes Industrial and Standard Series)



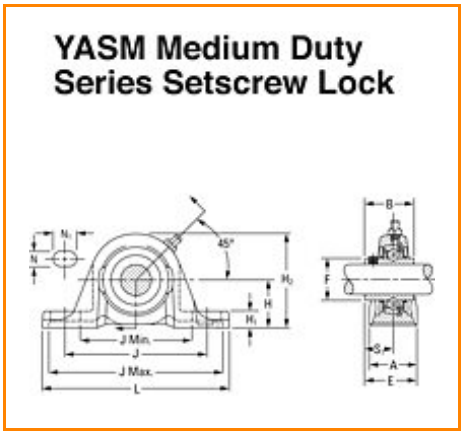

Specifications | Dimensions | Basic Load Ratings

Specifications

Bore Size d	2 3/16 in 55.6 mm
Bearing Number	GYM1203KRRB
Inside Ring Outside Diameter	3.011 in 76.5 mm
Dimension B1	2.563 in 65.1 mm
Dimension T	1.189 in 30.2 mm
Dimension D1	3.011 in 76.48 mm
Series	Industrial

Weight	9.898 lb 4.49 Kg
Seal Type	Shroud Seal

Dimensions

Shaft Height H	69.85 mm 2.750 in
Total Length L	239.7 mm 9.437 in
Total Width A	2.374 in 60.3 mm
Bolt Hole Spacing J	188.1 mm 7.406 in
Bolt Hole Width N	18.26 mm 0.719 in
Bolt Hole Length N1	29.46 mm 1.160 in
Base Height H1	23.8 mm 0.937 in
Total Height H2	138.9 mm 5.469 in
Dimension L1	79.9 mm 3.146 in
Inside Ring Width B	N/A
Center of Bearing from End S	26 mm 1.024 in

Basic Load Ratings

Static Load Rating	8000 lbf 35600 N

Dynamic Load Rating	13200 lbf 58800 N

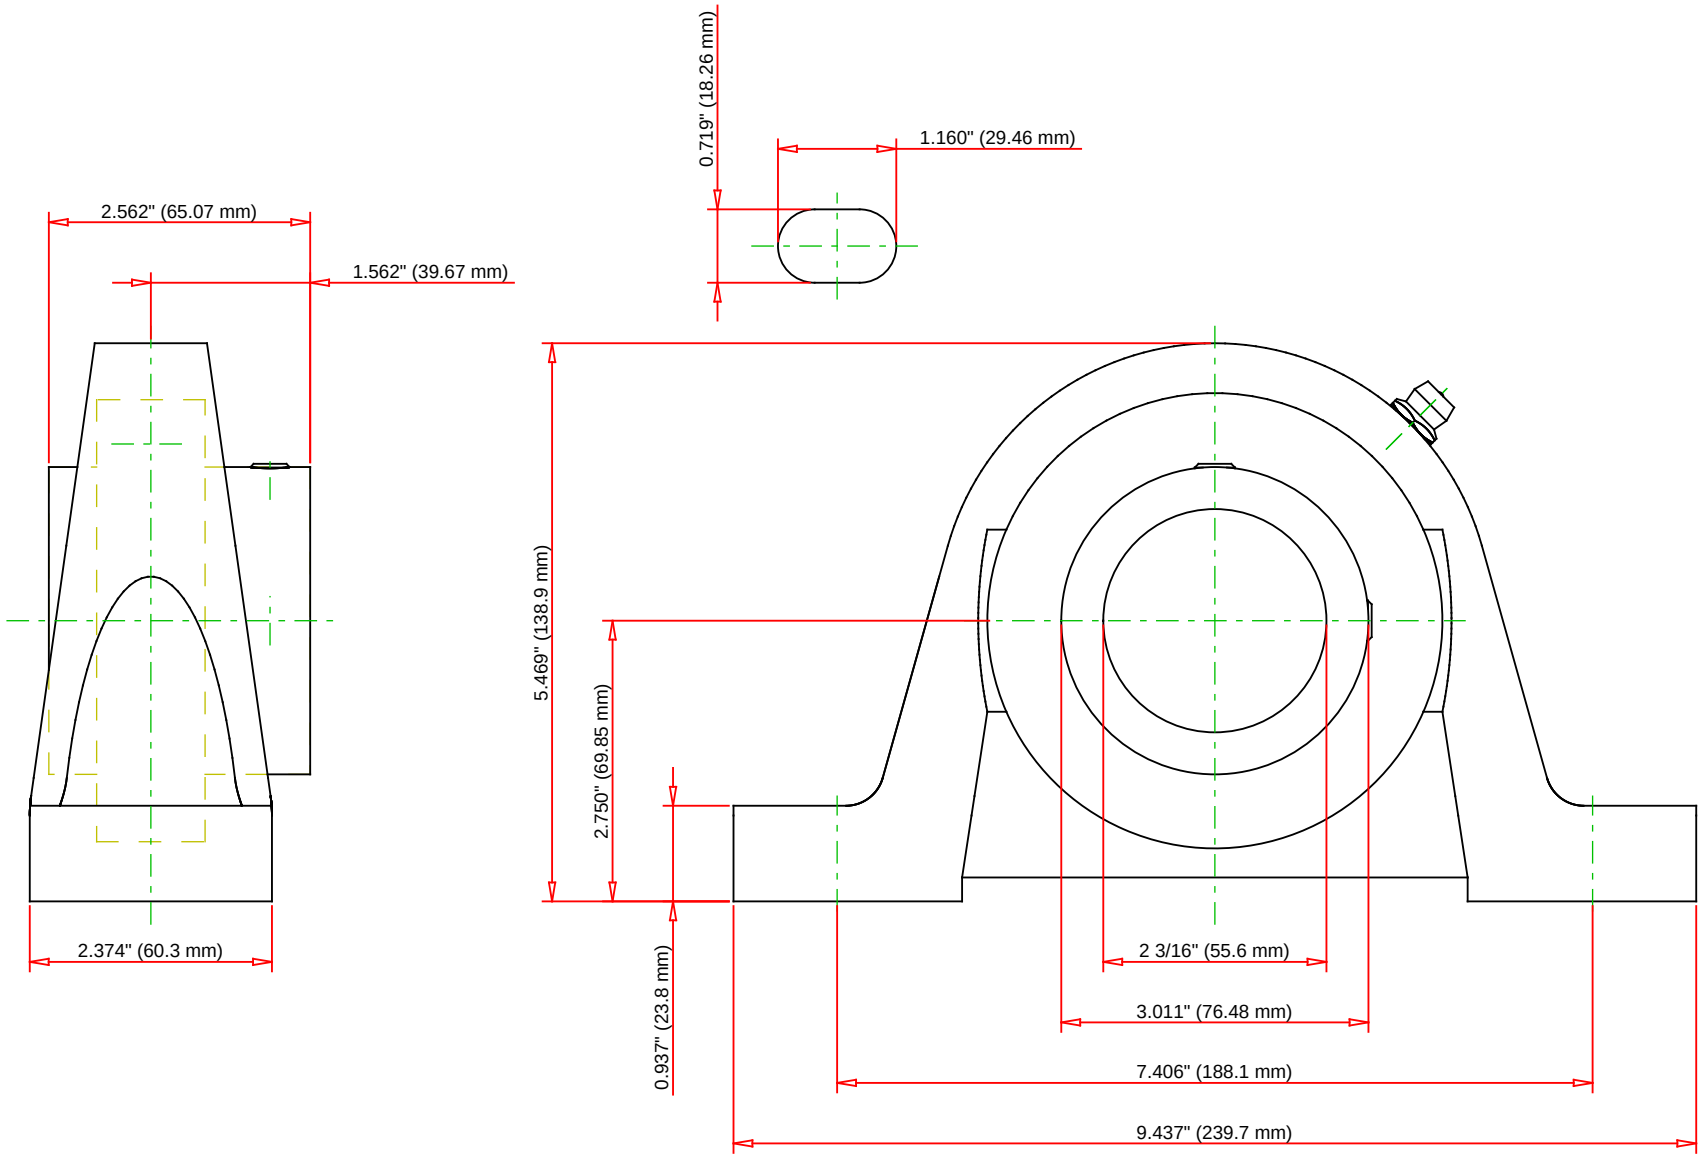

Bearing Number	GYM1203KRRB			
Load Ratings - C_r	13200	lbf	58800	N
Load Ratings - C_{0r}	8000	lbf	35600	N
Weight	0	lb	0	kg
Bolt Size	M10x1.5			

TIMKEN

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

YASM 2 3/16

Pillow Block Units Setscrew Locking (Includes Industrial and Standard Series)

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY