


The Timken Company


4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Timken Part Number RCJ2 3/16, Four-Bolt Flanged Units Eccentric Locking Collar (Includes Industrial and Standard Series)

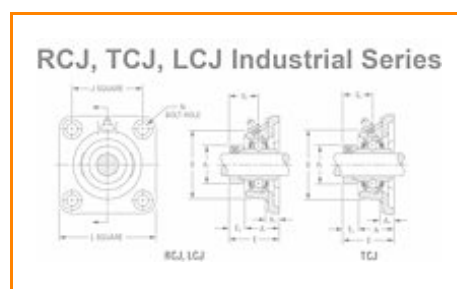

[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#)

Specifications

Bore Size d	2 3/16 in 55.6 mm
Bearing Number	G1203KRRB
Dimension D	4.748 in 120.6 mm
Dimension E	2.957 in 75.1 mm
Inside Ring Outside Diameter	2.980 in 75.7 mm
Series	Industrial
Weight	8.47 lb 3.842 Kg

Seal Type

Shroud Seal

Dimensions

Total Length L 161.9 mm
6.374 in

Total Width A 1.843 in
46.8 mm

Bolt Hole Spacing J 130.2 mm
5.126 in

Bolt Hole Size N 16 mm
0.630 in

Flange Thickness A1 16.7 mm
0.657 in

**Center of Bearing from Housing
End A2** 31.4 mm
1.236 in

Inside Ring Width B N/A


Bolt Size M16

**Center of Bearing from Bearing
End S** 31.4 mm
1.236 in

Basic Load Ratings

Static Load Rating 6400 lbf
28500 N

Dynamic Load Rating 48000 lbf
10800 N

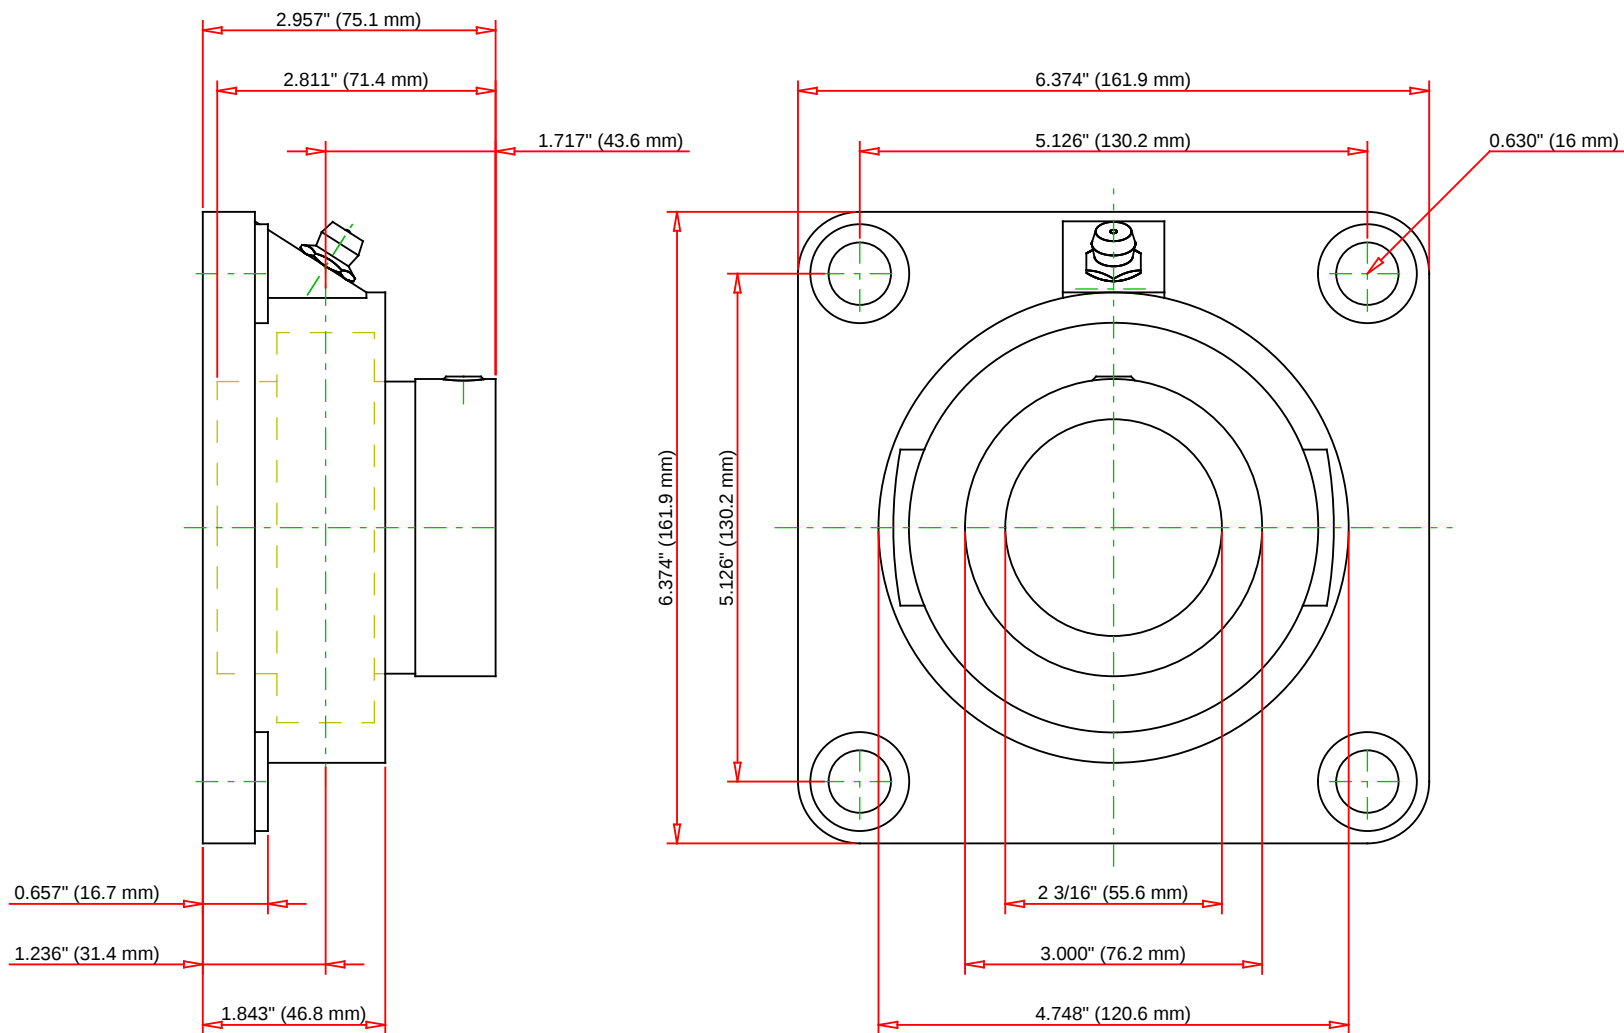

Bearing Number	G1203KRRB			
Load Ratings - C _r	10800	lbf	48000	N
Load Ratings - C _{0r}	6400	lbf	28500	N
Weight	8.47	lb	3.842	kg

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

RCJ2 3/16

Four-Bolt Flanged Units Eccentric Locking Collar
(Includes Industrial and Standard Series)

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY