The Timken Company
4500 Mt Pleasant St. NW
N. Canton, OH 44720
Phone: (234) 262-3000
E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number 7313WN, Fafnir® Single Row Angular Contact Ball Bearings (7200, 7300, 7400)

Timken® angular contact ball bearings are designed for combination radial and axial loading. Single-row bearings have high thrust capacity in one direction. Some single-row bearings are specifically designed for duplex mounting in sets for maximum performance.



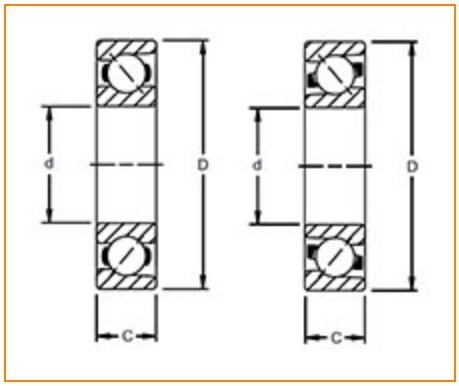

Dimensions | Basic Load Ratings | Factors | Specifications | Abutment and Fillet Dimensions

Dimensions

d - Bore	65.00 mm 2.5591 in
D - Outer Diameter	140.00 mm 5.5118 in
Bearing Width	33.00 mm 1.2992 in
Contact Angle	40 °

Basic Load Ratings

C0 - Static Radial Rating	75500 N 17000 lbf

Ce - Dynamic Radial Rating[1]	115000 N 26000 lbf

Factors

Limiting Speed (Grease)	3420 rpm
Limiting Speed (Oil)	3900 rpm

Specifications

Ball Type	STEEL
Cage Type	Ball Piloted, Pressed Brass Cage
Bearing Weight	2.477 Kg 5.46 lb
Design Units	METRIC

Abutment and Fillet Dimensions

R - Inner Ring "To Clear" Radius[2]	2 mm 0.083 in
r - Outer Ring "To Clear" Radius[3]	2 mm 0.083 in
da - Inner Ring Backing Diameter	77.00 mm 3.0300 in
Da - Outer Ring Backing Diameter	128.00 mm 5.0400 in

[1] Based on 10^6 revolutions of calculated fatigue life.
[2] Maximum housing fillet radius that bearing corners will clear.
[3] Maximum shaft fillet radius that bearing corners will clear.

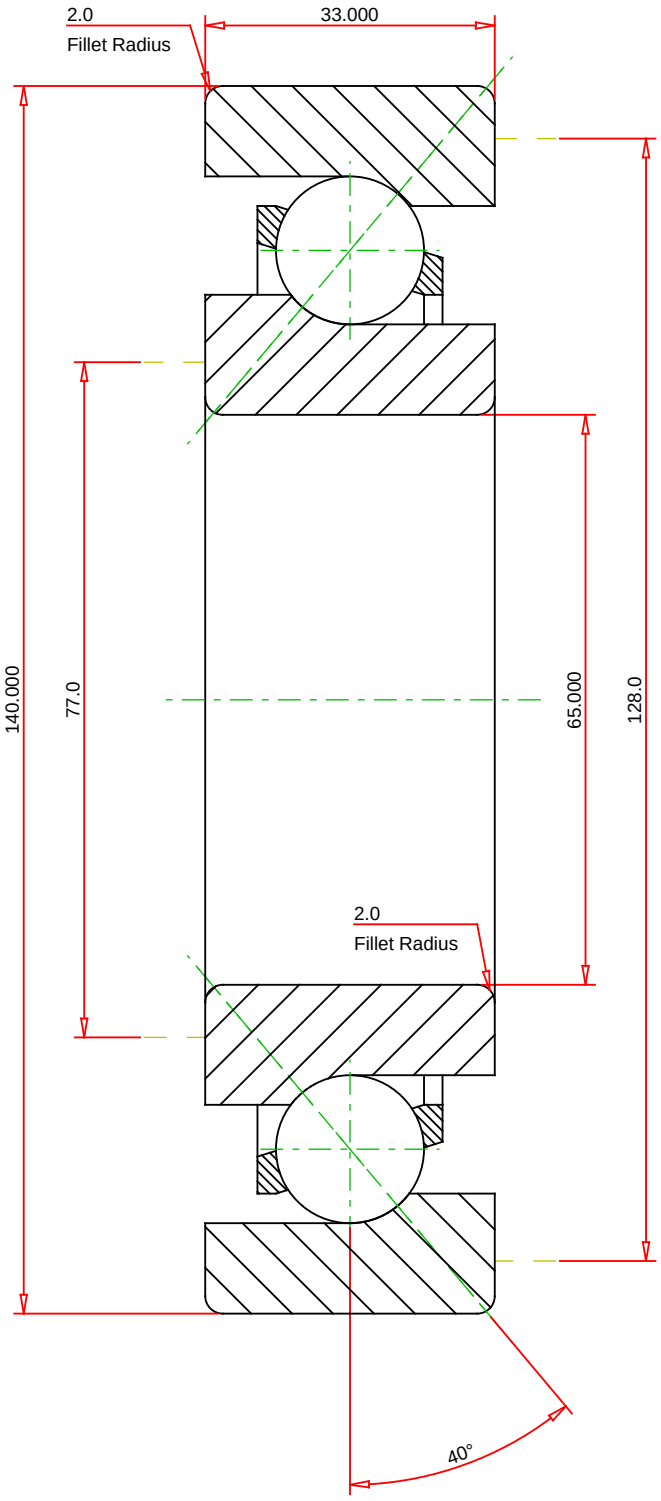

METRIC UNITS

Number of Balls Per Row	12	
Bearing Weight	2.477	kg

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

7313WN

Fafnir® Single Row Angular Contact Ball Bearings
(7200, 7300, 7400)

Dynamic Radial Rating	115000	N
Static Radial Rating	75500	N

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY