


The Timken Company


4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Timken Part Number RCJ2 15/16, Four-Bolt Flanged Units Eccentric Locking Collar (Includes Industrial and Standard Series)

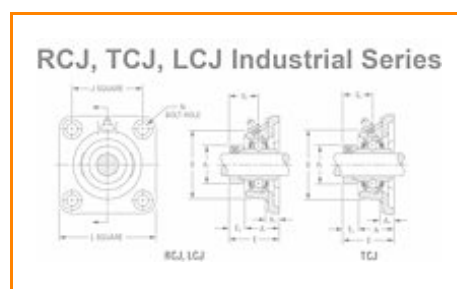

[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#)

Specifications

Bore Size d	2 15/16 in 74.6 mm
Bearing Number	G1215KRRB
Dimension D	6.374 in 161.9 mm
Dimension E	3.807 in 96.7 mm
Inside Ring Outside Diameter	3.980 in 101.1 mm
Series	Industrial
Weight	18.100 lb 8.21 Kg

Seal Type

Shroud Seal

Dimensions

Total Length L

196.8 mm
7.748 in

Total Width A

2.626 in
66.7 mm

Bolt Hole Spacing J

152.4 mm
6.000 in

Bolt Hole Size N

16 mm
0.630 in

Flange Thickness A1

22.2 mm
0.874 inCenter of Bearing from Housing
End A241.9 mm
1.650 in

Inside Ring Width B

N/A

Bolt Size

M16

Center of Bearing from Bearing
End S41.9 mm
1.650 in


Basic Load Ratings

Static Load Rating

9800 lbf
43600 N

Dynamic Load Rating

69500 lbf
15600 N

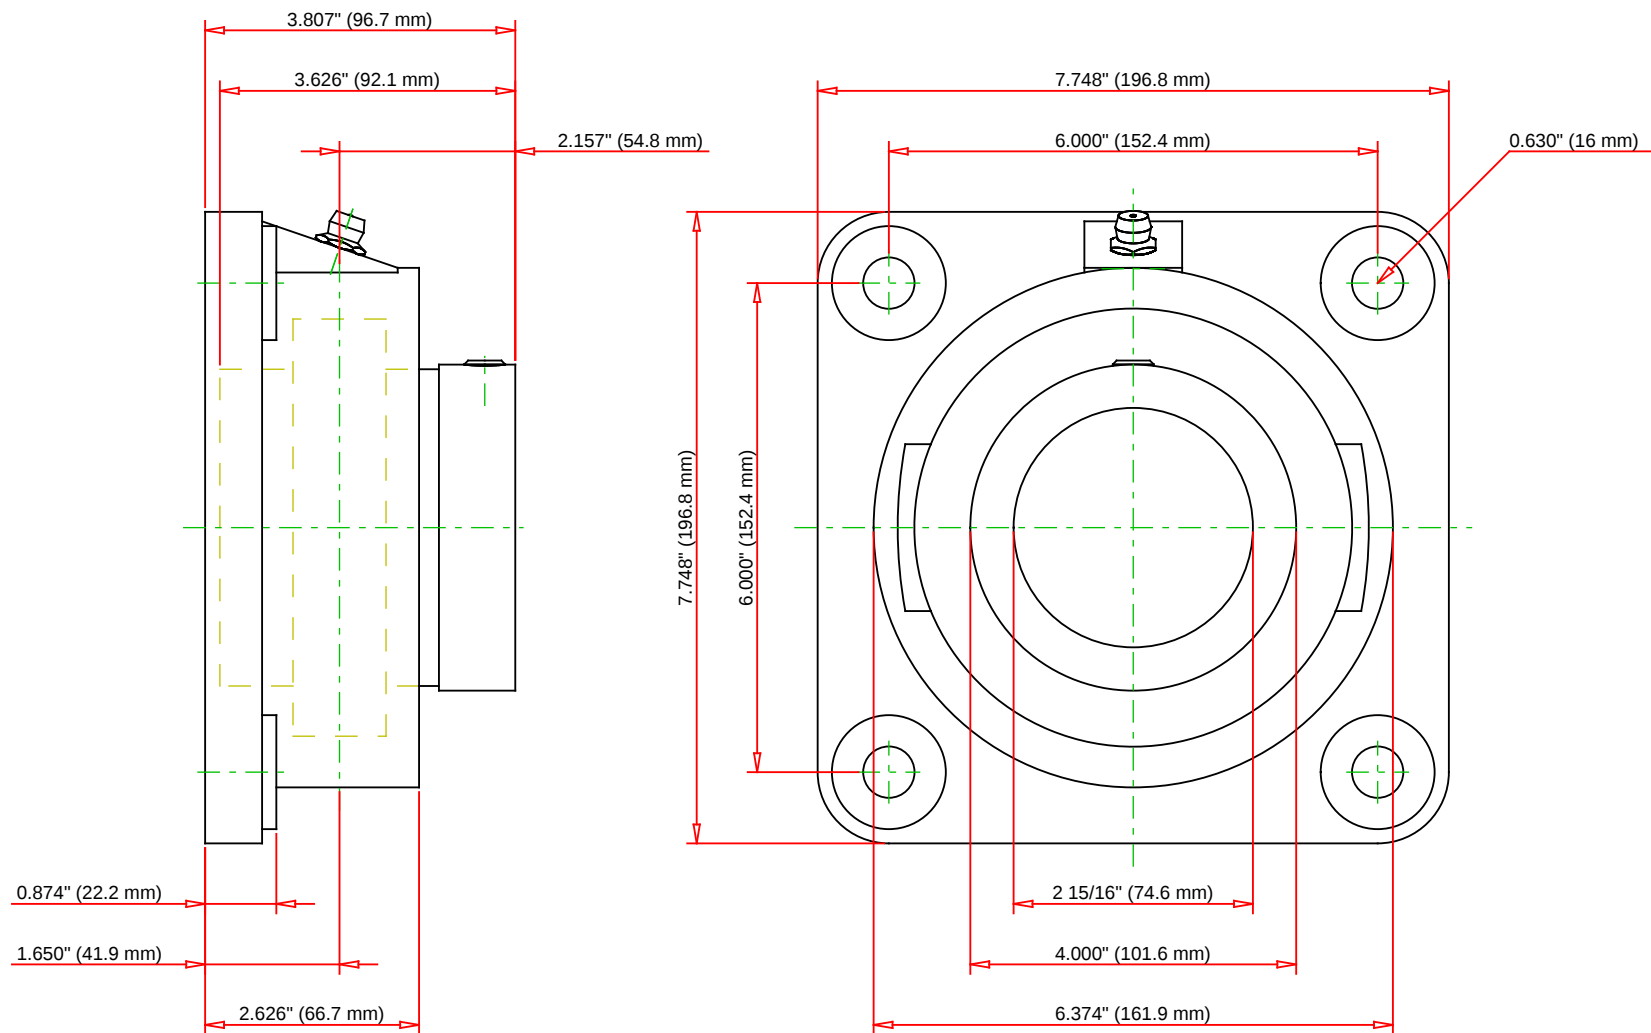

Bearing Number	G1215KRRB			
Load Ratings - C _r	15600	lbf	69500	N
Load Ratings - C _{0r}	9800	lbf	43600	N
Weight	18.1	lb	8.21	kg

TIMKEN

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

RCJ2 15/16

Four-Bolt Flanged Units Eccentric Locking Collar
(Includes Industrial and Standard Series)

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY