


The Timken Company

4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000


E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Timken Part Number 13685 - 13621, Tapered Roller Bearings - TS (Tapered Single) Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

RELATED PRODUCTS

RELATED PRODUCTS

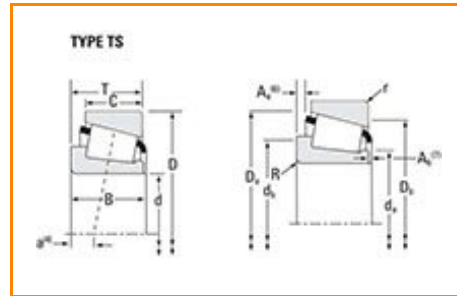

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Series	13600
Cone Part Number	13685
Cup Part Number	13621
Design Units	Imperial
Bearing Weight	0.60 lb
Cage Type	Stamped Steel

Dimensions

d - Bore	1.5 in
D - Cup Outer Diameter	2.7170 in
B - Cone Width	0.7500 in
C - Cup Width	0.5938 in
T - Bearing Width	0.7500 in

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius¹	0.14 in
r - Cup Backface "To Clear" Radius²	0.090 in
da - Cone Frontface Backing Diameter	1.69 in
db - Cone Backface Backing Diameter	1.95 in
Da - Cup Frontface Backing Diameter	2.60 in
Db - Cup Backface Backing Diameter	2.40 in
Ab - Cage-Cone Frontface Clearance	0.05 in
Aa - Cage-Cone Backface Clearance	0.02 in
a - Effective Center Location³	-0.12 in

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁴	17400 N 3920 lbf
---	---------------------

C1 - Dynamic Radial Rating (1 million revolutions)⁵	67200 N 15100 lbf
---	----------------------

C0 - Static Radial Rating	67900 N 15300 lbf
----------------------------------	----------------------

C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁶	12000 N 2700 lbf
---	---------------------

Factors

K - Factor⁷	1.45
-------------------------------	------

e - ISO Factor⁸	0.40
-----------------------------------	------

Y - ISO Factor⁹	1.49
-----------------------------------	------

G1 - Heat Generation Factor (Roller-Raceway)	20.7
---	------

G2 - Heat Generation Factor (Rib-Roller End)	10.9
---	------

Cg - Geometry Factor	0.0713
-----------------------------	--------

¹ These maximum fillet radii will be cleared by the bearing corners.

² These maximum fillet radii will be cleared by the bearing corners.

³ Negative value indicates effective center inside cone backface.

⁴ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.


⁵ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

⁶ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁷ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

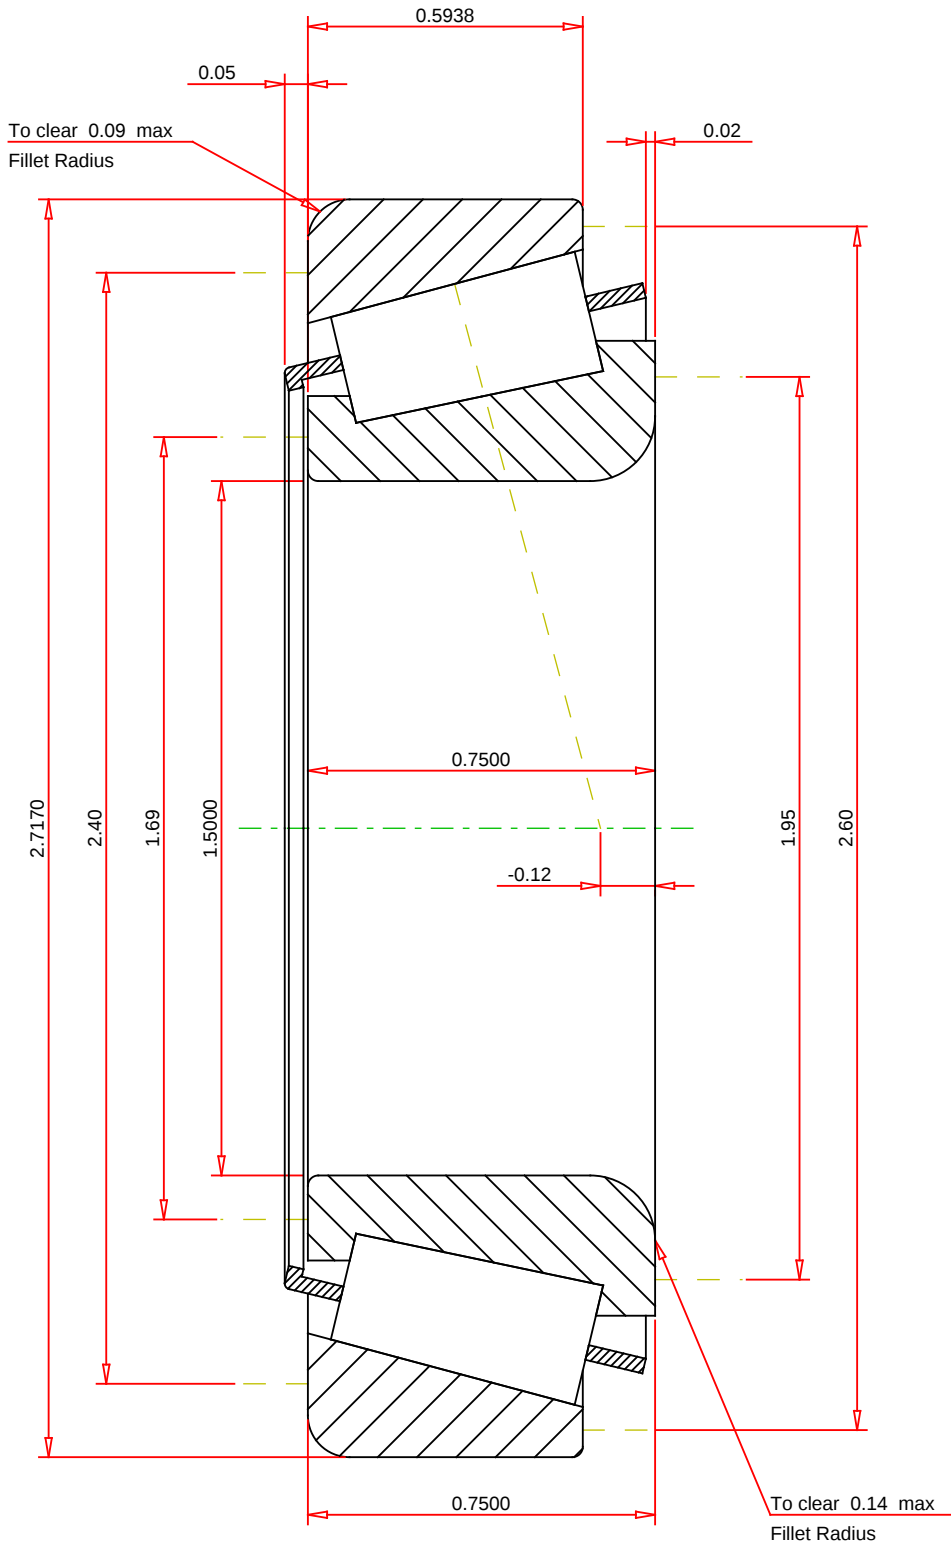

IMPERIAL UNITS

ISO Factor - e 0.4
ISO Factor - Y 1.49
Bearing Weight 0.6 lb
Number of Rollers Per Row 20
Effective Center Location -0.12 inch

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

13685 - 13621
TS BEARING ASSEMBLY

K Factor	1.45
Dynamic Radial Rating - C90	17400 lbf
Dynamic Thrust Rating - Ca90	12000 lbf
Static Radial Rating - C0	67900 lbf
Dynamic Radial Rating - C1	67200 lbf

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY