The Timken Company
4500 Mt Pleasant St. NW
N. Canton, OH 44720
Phone: (234) 262-3000
E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number RTU 2 3/8, Fafnir® Take-Up Units Eccentric Locking Collar



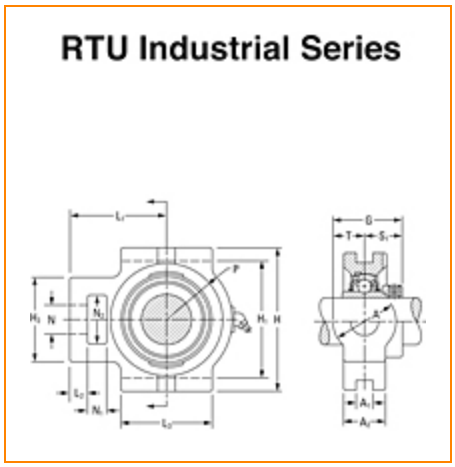

Specifications | Dimensions | Basic Load Ratings

Specifications

Shaft Size d	2 3/8 in 60.3 mm
Bearing Number	G1206KRRB
Dimension G	3.220 in 81.8 mm
Dimension P	2.720 in 69.1 mm
Dimension T	1.374 in 34.9 mm
Series	Industrial
Weight	13.2 lb 5.99 Kg
Seal Type	Shroud Seal

Housing Construction	Take-Up
Alternate Part Name	RTU2 3/8

Dimensions

Housing Width A	27 in 69.8 mm
Slot Width A1	27.00 mm 1.063 in
Socket Width A2	52.4 mm 2.063 in
Total Height H	149.2 mm 5.874 in
Pitch Height H1	129.4 mm
Height H2	101.6 mm
Total Length L	189.0 mm 7.441 in
Shaft Length L1	119.9 mm 4.72 in
Dimension L2	19.00 mm
Slot Length L3	101.60 mm 4.000 in
Adjustment Screw Bore N	22.2 mm 0.874 in
Opening Width N1	31.8 mm 1.252 in
Opening Height N2	63.5 mm 2.5 in
Inside Ring Width B	61.91 mm 2.437 in
	31 mm

Center of Bearing from End S	31 mm 1.220 in

Basic Load Ratings

Static Load Rating	8080 lbf 35900 N
Dynamic Load Rating	13100 lbf 58200 N

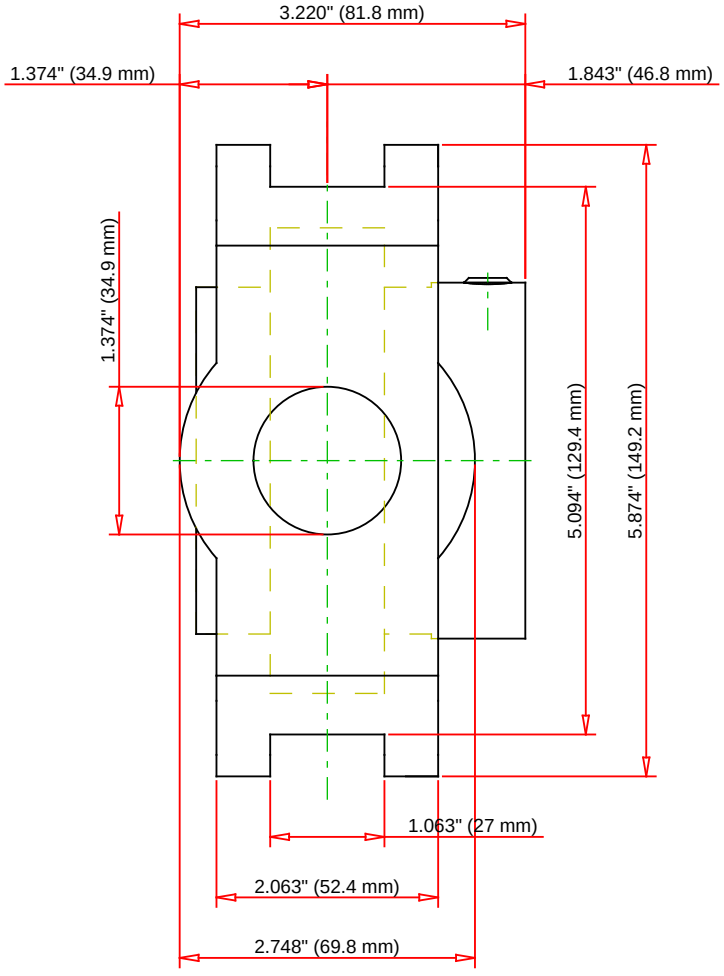

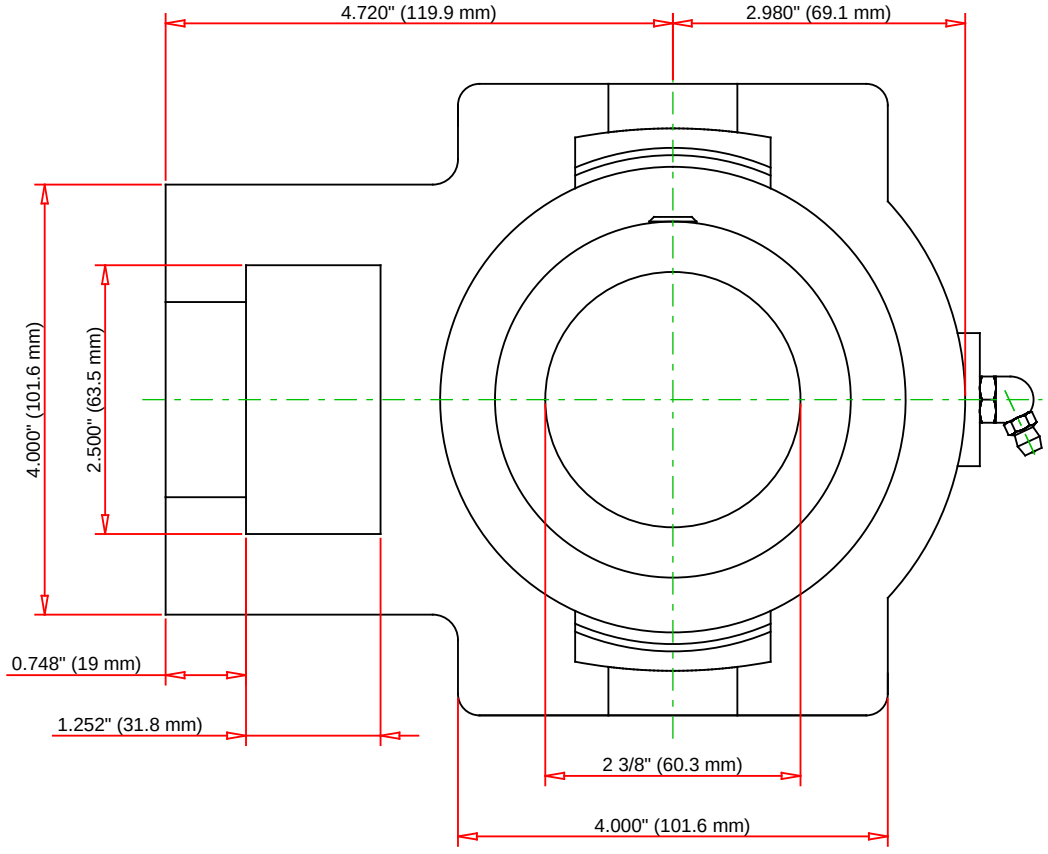

Bearing Number	G1206KRRB			
Load Ratings - C_r	13100	lbf	58200	N
Load Ratings - C_{0r}	8080	lbf	35900	N
Weight	24.3	lb	11	kg

TIMKEN

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

RTU 2 3/8

Fafnir® Take-Up Units Eccentric Locking Collar

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY