The Timken Company
4500 Mt Pleasant St. NW
N. Canton, OH 44720
Phone: (234) 262-3000
E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number 7405W, Fafnir® Single Row Angular Contact Ball Bearings (7200, 7300, 7400)

Timken® angular contact ball bearings are designed for combination radial and axial loading. Single-row bearings have high thrust capacity in one direction. Some single-row bearings are specifically designed for duplex mounting in sets for maximum performance.



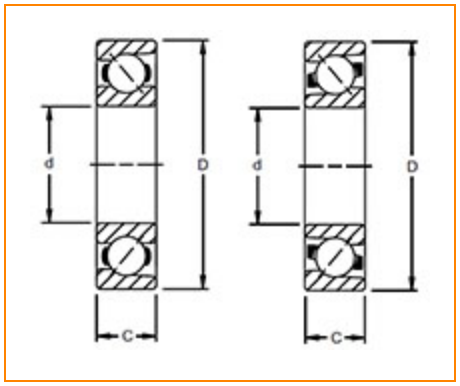

Dimensions | Basic Load Ratings | Specifications | Abutment and Fillet Dimensions

Dimensions

d - Bore	25.00 mm 0.9843 in
D - Outer Diameter	80.00 mm 3.1496 in
Bearing Width	21.00 mm 0.8268 in
Contact Angle	20 °

Basic Load Ratings

C0 - Static Radial Rating	25900 N 5850 lbf
	53300 N

Ce - Dynamic Radial Rating[1]	53300 N 12000 lbf

Specifications

Ball Type	STEEL
Cage Type	Steel Cage
Bearing Weight	0.925 Kg 2.04 lb
Design Units	METRIC

Abutment and Fillet Dimensions

R - Inner Ring "To Clear" Radius[2]	1.50 mm 0.059 in
r - Outer Ring "To Clear" Radius[3]	1.50 mm 0.059 in
da - Inner Ring Backing Diameter	34.00 mm 1.3400 in
Da - Outer Ring Backing Diameter	71.10 mm 2.8000 in

[1] Based on 10^6 revolutions of calculated fatigue life.
[2] Maximum housing fillet radius that bearing corners will clear.
[3] Maximum shaft fillet radius that bearing corners will clear.

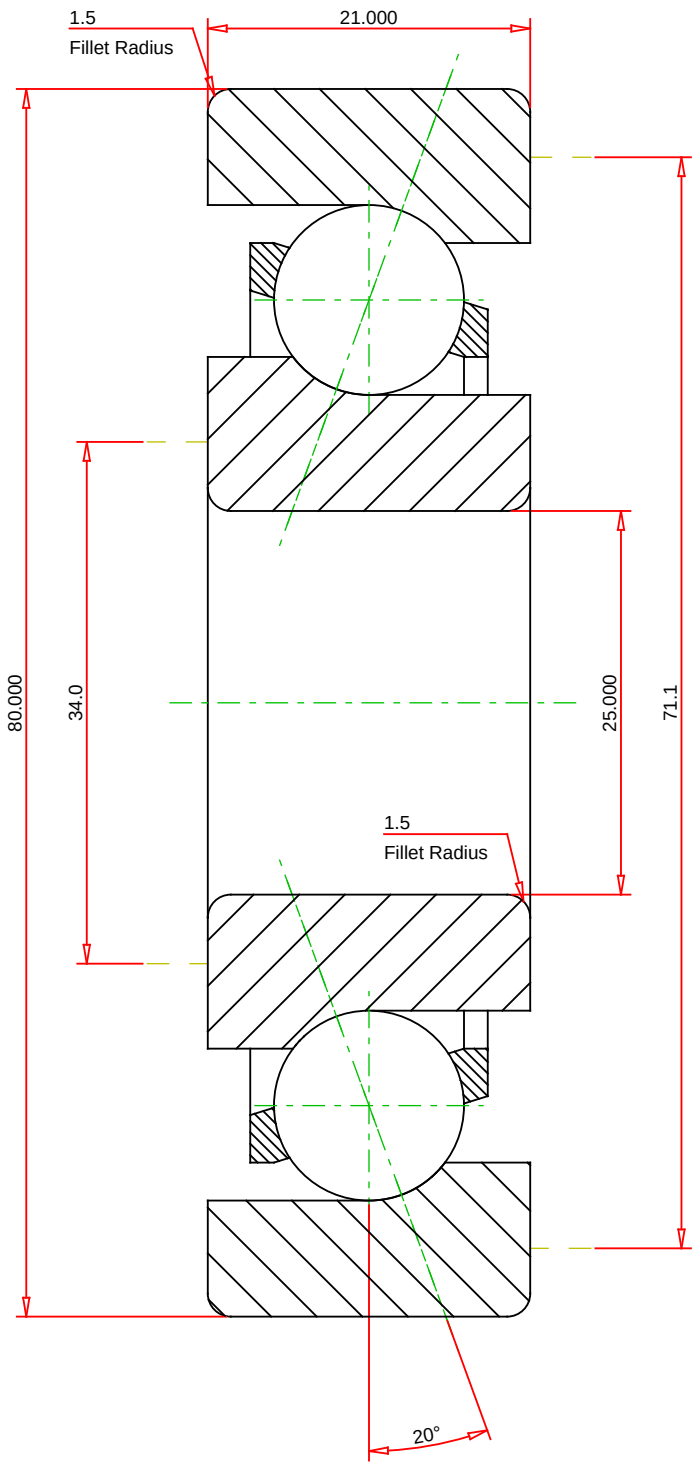

METRIC UNITS

Number of Balls Per Row	8	
Bearing Weight	0.925	kg

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

7405W

Fafnir® Single Row Angular Contact Ball Bearings
(7200, 7300, 7400)

Dynamic Radial Rating	53300	N
Static Radial Rating	25900	N

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY