


The Timken Company


4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Timken Part Number YCJT 3/4 SGT, Two-Bolt Flanged Units Setscrew Locking (Includes Industrial and Standard Series)

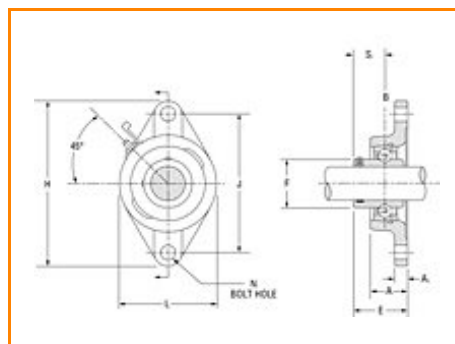

[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#)

Specifications

Bore Size d	3/4 in 19.1 mm
Bearing Number	GY1012KRRB SGT
Dimension E	1.512 in 38.4 mm
Inside Ring Outside Diameter	1.087 in 27.6 mm
Series	Industrial
Weight	1.022 lb 0.460 Kg
Seal Type	Shroud Seal



Dimensions

Total Length H	111.9 mm 4.406 in
Total Height L	60.3 mm 2.374 in
Total Width A	1.094 in 27.8 mm
Bolt Hole Spacing J	89.7 mm 3.531 in
Bolt Hole Size N	10 mm 0.394 in
Flange Thickness A1	11.1 mm 0.437 in
Center of Bearing from Housing End A2	19.3 mm 0.760 in
Inside Ring Width B	31.8 mm 1.252 in
Center of Bearing from Bearing End S	19.3 mm 0.760 in

Basic Load Ratings

—

Static Load Rating	1400 lbf 6200 N
Dynamic Load Rating	3200 lbf 14300 N

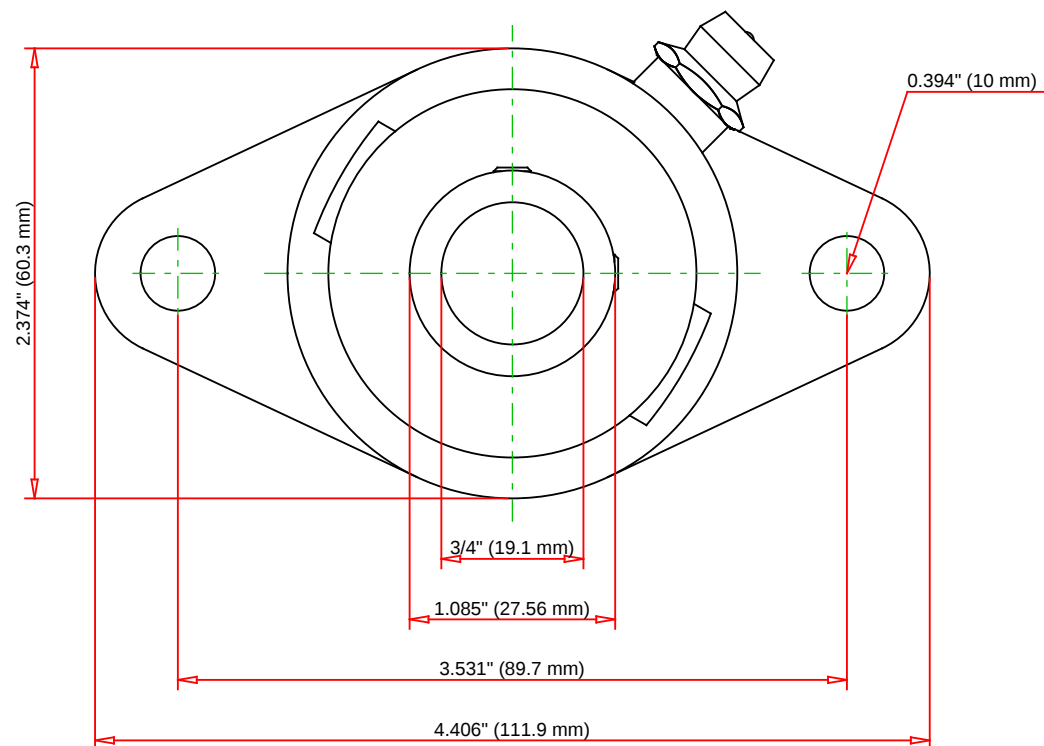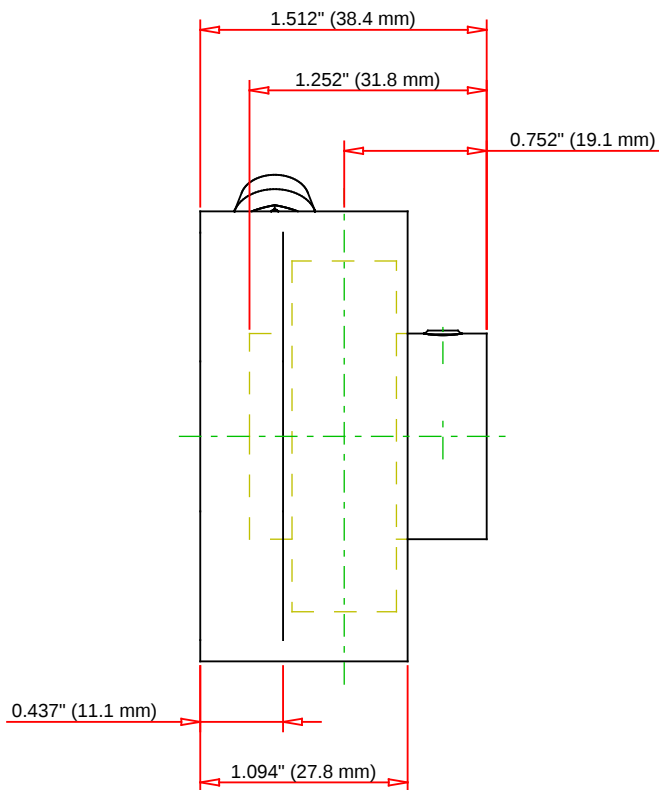

Bearing Number	GY1012KRRB SGT			
Load Ratings - C _r	3200	lbf	14300	N
Load Ratings - C _{0r}	1400	lbf	6200	N
Weight		lb		kg
Bolt Size	M5x0.8			

TIMKEN

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

YCJT 3/4 SGT

Two-Bolt Flanged Units Setscrew Locking
(Includes Industrial and Standard Series)

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY