


**The Timken Company**

4500 Mt Pleasant St. NW


N. Canton, OH 44720

**Phone:** (234) 262-3000

**E-Mail:** [CustomerCAD@timken.com](mailto:CustomerCAD@timken.com) • **Web site:** [www.timken.com](http://www.timken.com)

## Timken Part Number SNW-44 x 8, SNW/SNP – Pull-Type Sleeve, Locknut, Lockwasher/Lockplate Assemblies

- The table below shows dimensions for adapter assemblies and components used in the mounting of tapered bore bearings on shafts.
- SNW assembly consists of a sleeve, locknut and lockwasher.
- SNP assembly consists of a sleeve, locknut and lockplate.

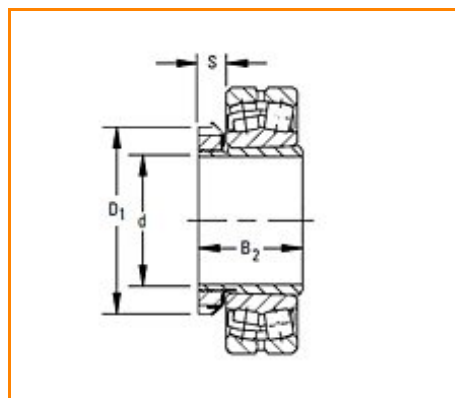

[Specifications](#) | [Shaft Dimensions](#) | [Adapter Dimensions](#) | [Accessory Numbers](#)

### Specifications

|                                |          |
|--------------------------------|----------|
| <b>Series</b>                  | 222K     |
| <b>Diameter d</b>              | 8 in     |
| <b>Bearing Number</b>          | 22244K   |
| <b>SNW/SNP Assembly Weight</b> | 33.00 lb |

### Shaft Dimensions

|                              |           |
|------------------------------|-----------|
| <b>Tolerance<sup>1</sup></b> | -0.005 in |
|------------------------------|-----------|

## Adapter Dimensions



|                      |            |
|----------------------|------------|
| <b>B<sub>2</sub></b> | 5 29/32 in |
| <b>S<sup>2</sup></b> | 1 3/8 in   |
| <b>D<sub>1</sub></b> | 11 in      |

## Accessory Numbers



|                                  |              |
|----------------------------------|--------------|
| <b>Sleeve</b>                    | S-44 x 8.000 |
| <b>Locknut</b>                   | N-044        |
| <b>Lockwasher and Lockplates</b> | W-44         |

<sup>1</sup> Tolerance range is from +0 to value listed.

<sup>2</sup> Tolerance -0 to + 0.4 mm (-0 to +1/64 in)