


The Timken Company


4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Timken Part Number VCJT 1 3/8, Two-Bolt Flanged Units Eccentric Locking Collar (Includes Industrial and Standard Series)

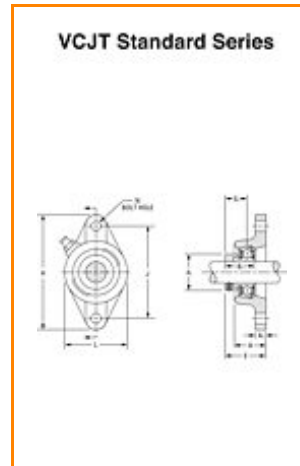

[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#)

Specifications

Bore Size d	1 3/8 in 34.9 mm
Bearing Number	GRA106RRB
Dimension E	1.988 in 50.5 mm
Inside Ring Outside Diameter	2.110 in 53.6 mm
Series	Standard
Weight	3.003 lb 1.362 Kg
Seal Type	Molded Shroud

Dimensions





Total Width A	31.8 mm 1.252 in
Total Length H	155.6 mm 6.126 in
Total Height L	92.1 mm 3.626 in
Bolt Hole Spacing J	130.2 mm 5.126 in
Bolt Hole Size N	13.1 mm 0.516 in
Flange Thickness A1	11.9 mm 0.469 in
Center of Bearing from Housing End A2	21.1 mm 0.831 in
Inside Ring Width B	38.9 mm 1.531 in
Center of Bearing from Bearing End S	21.1 mm 0.831 in

Basic Load Ratings



Static Load Rating	6400 lbf 28500 N
Dynamic Load Rating	3400 lbf 15100 N

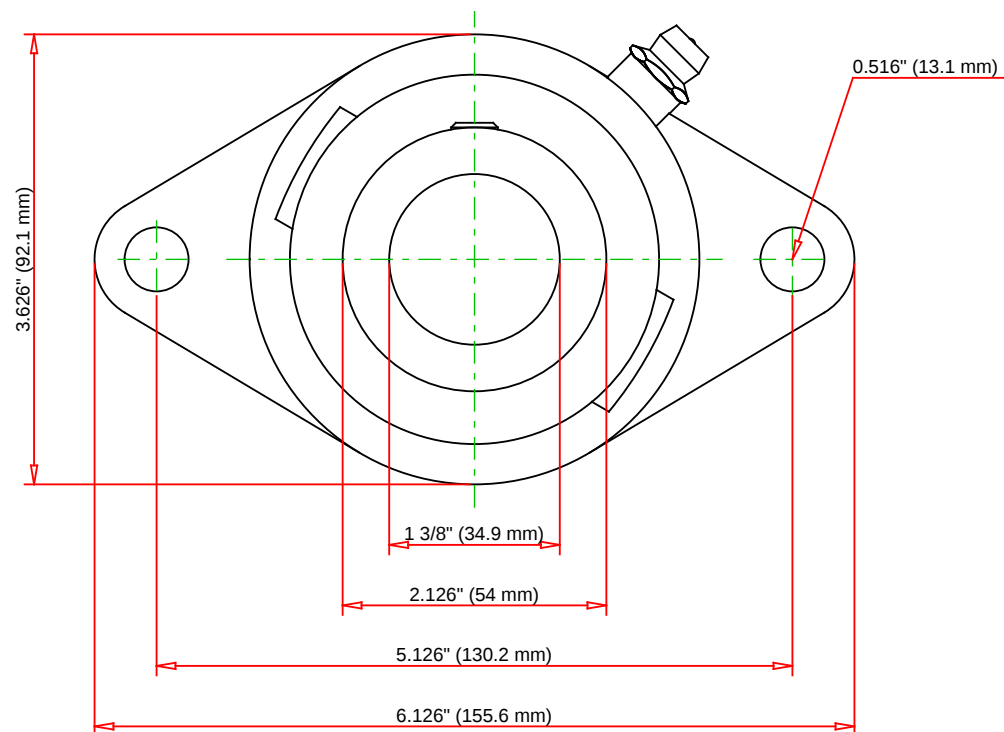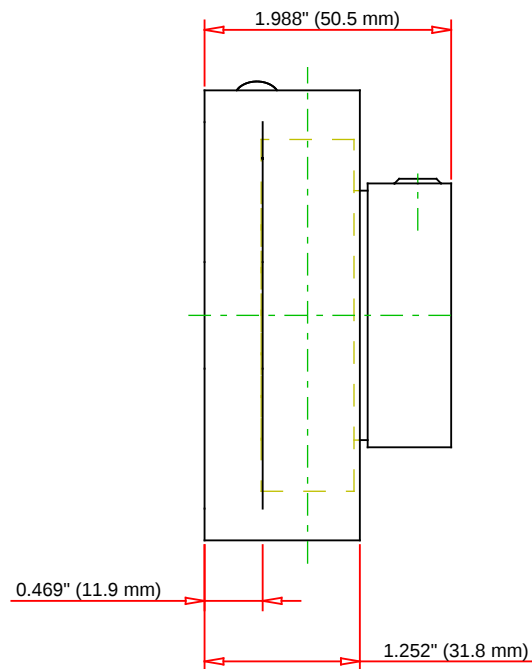

Bearing Number	GRA106RRB			
Load Ratings - C _r	6400	lbf	28500	N
Load Ratings - C _{0r}	3400	lbf	15100	N
Weight	3.003	lb	1.362	kg

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

VCJT 1 3/8
Two-Bolt Flanged Units Eccentric Locking Collar
(Includes Industrial and Standard Series)

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY