
The Timken Company
4500 Mt Pleasant St. NW
N. Canton, OH 44720
Phone: (234) 262-3000
E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Timken Part Number YCJM2 15/16, Four-Bolt Flanged Units Setscrew Locking (Includes Industrial and Standard Series)



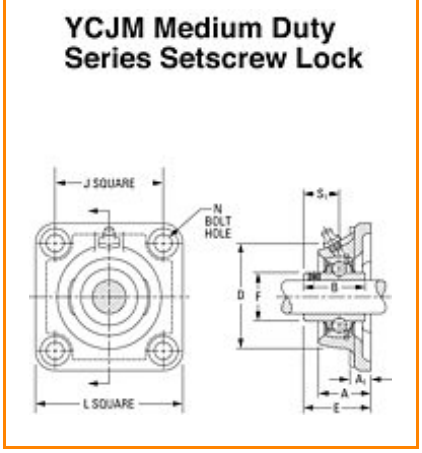

Specifications | Dimensions | Basic Load Ratings

Specifications

Bore Size d	2 15/16 in 74.6 mm
Bearing Number	GYM1215KRRB
Dimension D	7.063 in 179.4 mm
Dimension E	3.575 in 90.8 mm
Inside Ring Outside Diameter	3.873 in 98.37 mm
Series	Medium-Duty
Weight	17.25 lb 7.82 Kg


Seal Type	Shroud Seal

Dimensions

Total Length L	196.8 mm 7.748 in
Total Width A	2.626 in 66.7 mm
Bolt Hole Size N	20 mm 0.787 in
Flange Thickness A1	22.2 mm 0.874 in
Center of Bearing from Housing End A2	46.4 mm 1.827 in
Inside Ring Width B	N/A
Total Height	196.8 mm 7.748 in
Bolt Size	M20
Center of Bearing from Bearing End S	33.4 mm 1.315 in

Basic Load Ratings

Static Load Rating	12000 lbf 53400 N
Dynamic Load Rating	18000 lbf 80200 N

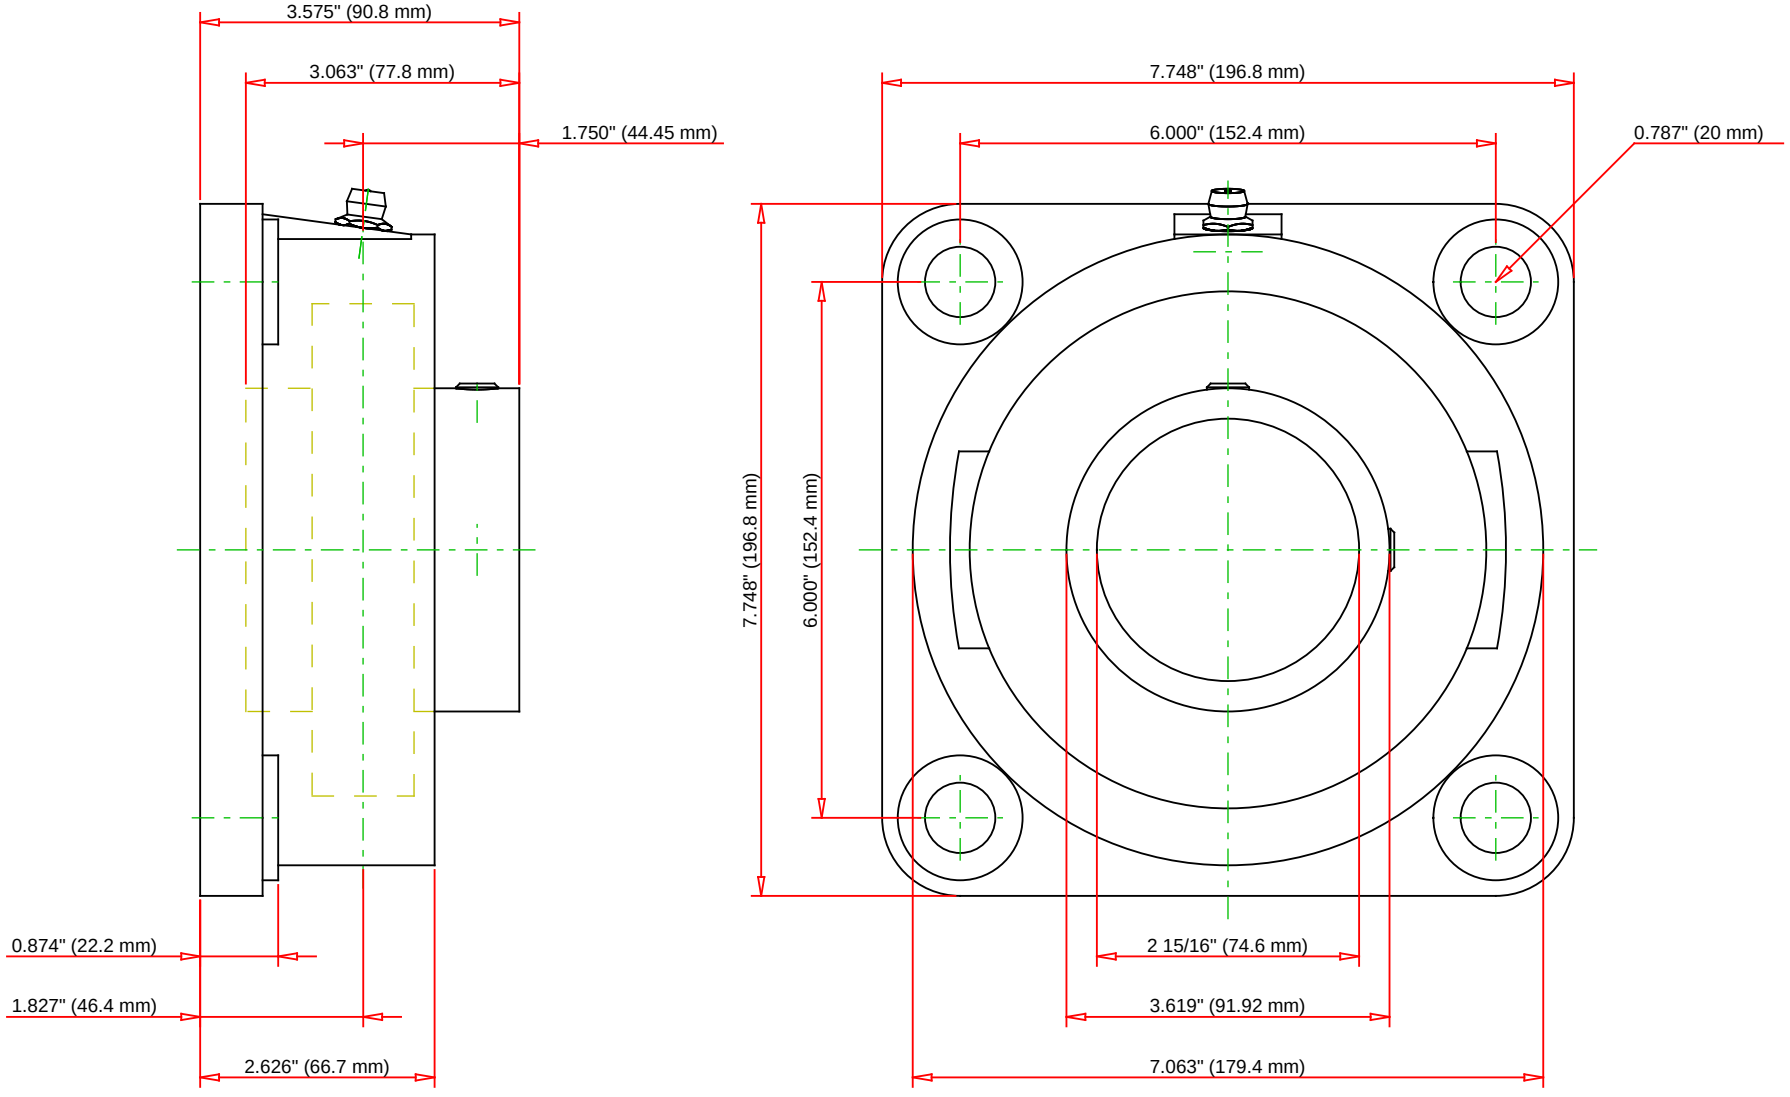

Bearing Number	GYM1215KRRB			
Load Ratings - C_r	18000	lbf	80200	N
Load Ratings - C_{0r}	12000	lbf	53400	N
Weight	0	lb	0	kg
Bolt Size	M12x1.75			

TIMKEN

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

YCJM2 15/16

Four-Bolt Flanged Units Setscrew Locking
(Includes Industrial and Standard Series)

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY