

# McGill™ HID Temporary Lighting

## Designed and Packaged for Quick Installation

**NEC:**  
Listed for Ordinary (Unclassified) Locations

### Applications

- More and more contractors are using temporary HID fixtures to light their work sites. Instead of modifying Low-Bay fixtures for this application, McGill's HID Temporary Lighting allows them to buy something faster and easier.

### Features

- 400 W Pulse Start Metal Halide lamp provides over 6' candles of illumination at a 6.1 m (20 ft) mounting height.
- McGill offers lighting layouts to conform with OSHA requirements for light output.
- Type "O" lamp and mogul socket complies with NEC 2008 Section 410.130(F)(5) and ANSI C78.387.
- Quick-attach durable 254 mm (10 in) welded wire guard mounts directly to the body to protect lamp and lampholder from accidental impact.
- Fixture is factory wired at 120 Volt, but can be rewired internally for other voltage settings.
- 0.9 meter (3 ft) cord with 5-15P molded plug on end.
- Compact size for easy handling.
- Low-profile fixture design keeps it up and out of the way of activity below.
- High light output and long lamp life.
- Open-air ballast for cooler operation.
- Hook with locking feature.
- (2) 19.1 mm (3/4 in) knock-outs for conduit access.
- Single durable package design makes it easier for distributors to stock and more organized for contractors on the job site.
- Quick and easy to assemble.
- Optional bottom trap available.

### Standard Materials

- Enclosure: Heavy-duty steel with powder coated finish
- Lamp: 400 Watt Pulse Start Metal Halide: O-Type, BT37 Clear, EX39 (Exclusionary Mogul Base)
- Multi-Tap ballast: 120, 208, 240, 277 Volt; Factory wired at 120 Volt
- Power cord: 0.9 meter (3 ft), 18/3 SJTW, 120 Volt, 15 Amp cord complete with NEMA 5-15 molded plug
- Lamp guard: 11 ga. white painted steel
- Mounting hook: 11 ga. steel

### NEC Certifications and Compliances

- UL and cUL Listed: E196293
- UL Standard: UL 1598
- Suitable for damp locations


### Options

- Optional bottom trap available




Shown with optional bottom trap

### Illustrated Feature



Spring-lock hook allows contractors to mount the unit in seconds, without the need for tools.

### Dimensions in Millimeters (Inches)

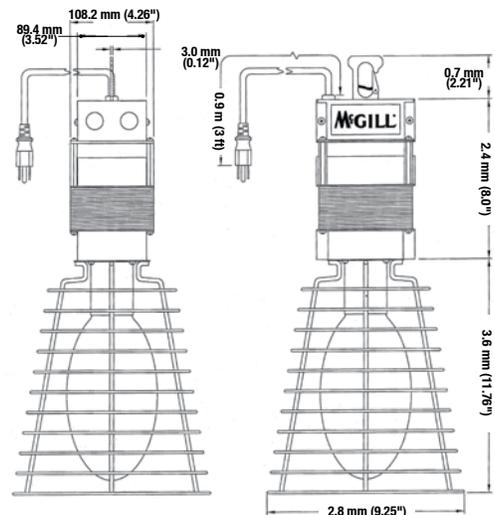

	Catalog Number
400 W Fixture with Guard	TL40PMT0
Bottom Guard Trap	TLTRAPW
Replacement Lamp Guard	TLGUARDW
Replacement Lamp: 400 W PSMH, O-Type, BT37 Clear, EX39	GMP400BUPS